Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Waveguide to Coax Adapter, Right Angle

WR-6.5/0.8mm Female/110-170GHz Model: TL-06WCA0.8R

The TL-06WCA0.8R is right angle waveguide to coax adapters that cover the frequency range of 110 to 170 GHz. It is designed for an efficient transition between the rectangular waveguide and 0.8 mm coax connector.

Features:

- Operating Frequency 110 to 170GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

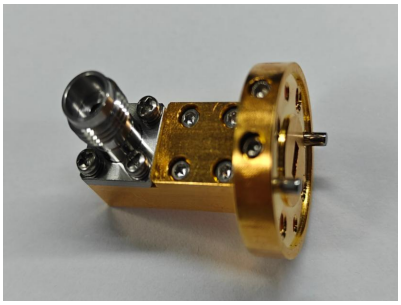

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	110		170	GHz
Insertion Loss		1.4	2.1	dB
VSWR		1.6		:1
Power Handing			10	W


Envrionmental And Physical Characteristics:

Parameter	Description	Units
Material	Brass	
Finish	Gold Plated	
Coax Connector	0.8mm Female	
Waveguide	WR-6.5/UG-387/U-M	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

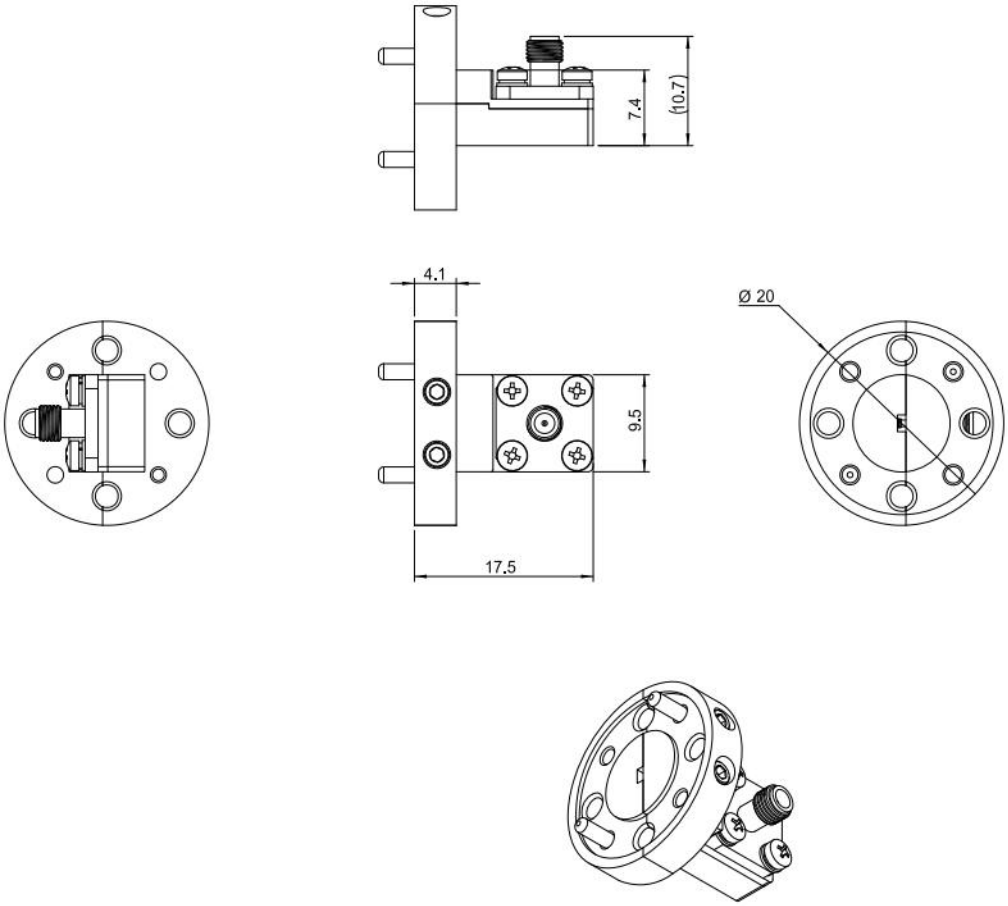


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Ordering Information:

Base Number	Description	Revision
TL-06WCA0.8R	Waveguide to Coax Adapter, Right Angle WR-6.5/0.8mm Female,110-170GHz	Rev.1.0

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

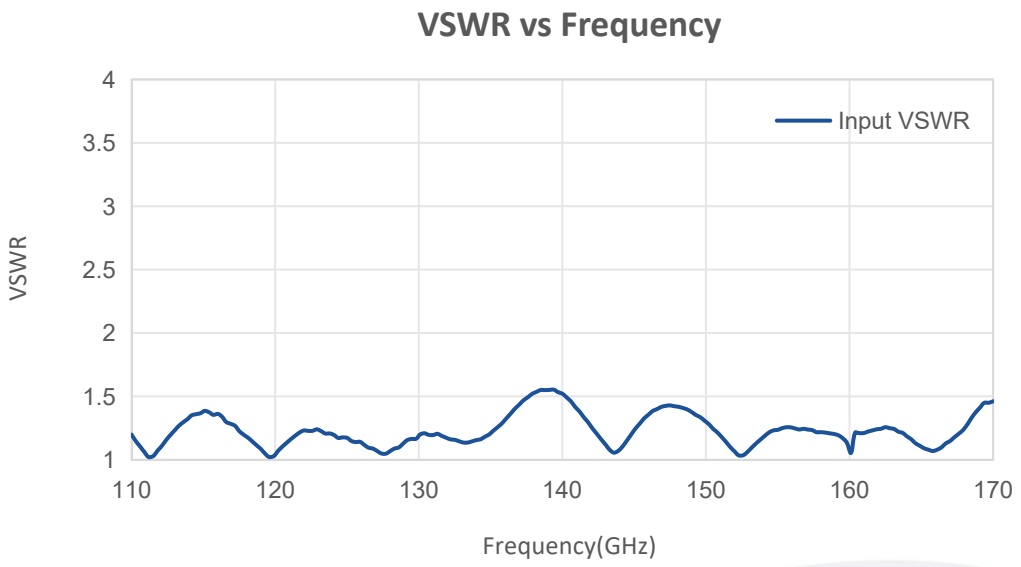

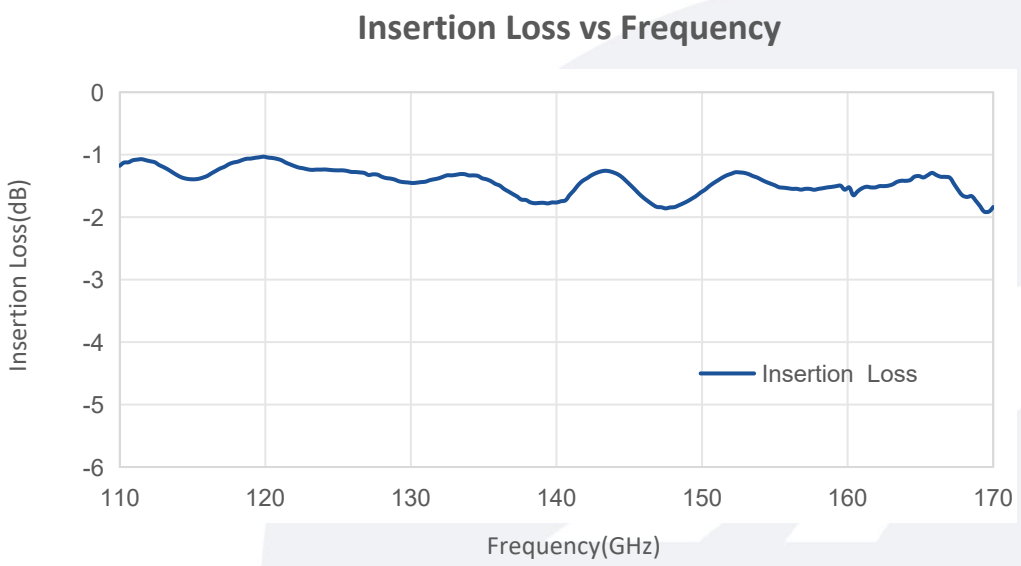

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.