

Power Limiter

DC-40GHz /2W,Power Handling

Model: TLMTDC40G-33-16

The TLMTDC40G-33-16 is a broadband limiter product. This limiter has an operating frequency range that can cover DC-40 GHz and features stable performance.

Features:

- Ultra Wide Band:DC-40 GHz
- RF Power Handling:2W(CW)
- Limiting power:16 dBm
- Low Insertion Loss
- 50 Ohm Matched Input / Output

Applications:

- Communication receiver
- Laboratory test
- Sensor radar

Electrical Characteristics:

| Parameter | Min | Typ | Max | Units |
|--------------------|-------|-----|-----|-------|
| Frequency range | DC-40 | | | GHz |
| Insertion Loss | | 1.3 | | dB |
| Limiting power | | 16 | | dBm |
| Input Return Loss | | -12 | | dB |
| Output Return Loss | | -12 | | dB |
| Power handling(cw) | | | 33 | dBm |
| Impedance | 50 | | | Ohms |

Mechanical Specifications:



| Parameter | Value | Units |
|-------------------------|---------------------------|-------|
| Input /Output Connector | 2.92mm Male/2.92mm Female | |
| Length | 42.2 | mm |

Absolute Maximum Ratings:

| Parameter | Value |
|-----------------------|----------------------|
| RF Input Power | +33 dBm |
| ESD sensitivity (HBm) | Class 0, passed 150V |

Outline Drawing:

Unit:mm

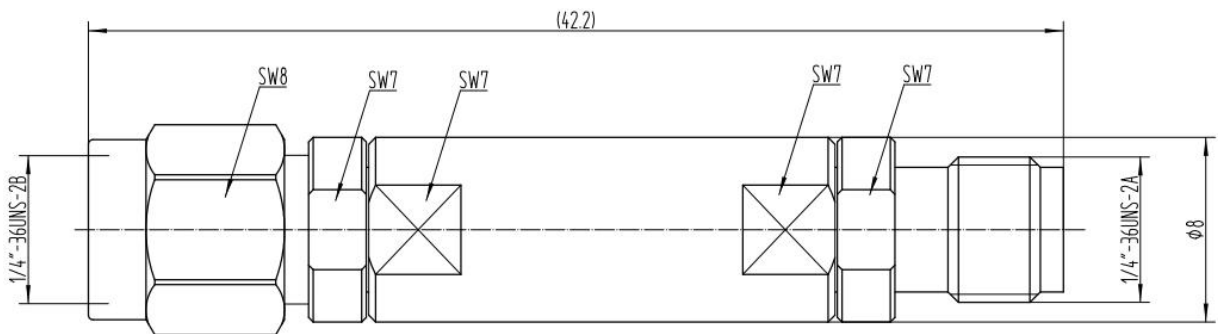

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


| Parameter | Min | Typ | Max | Units |
|---------------------------------|---|-----|------|-------|
| Operating Temperature | -45 | | +85 | °C |
| Non-operating Temperature | -55 | | +125 | °C |
| Relative humidity | | 95 | | % |
| Altitude | 10,000 | | | feet |
| Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |

Ordering Information:


| Base Number | Description | Revision |
|-----------------|--|----------|
| TLMTDC40G-33-16 | Power Limiter, DC-40GHz, Limiting power:16 dBm | Rev.1.1 |

Typical Performance Data:


Insertion Loss vs Frequency

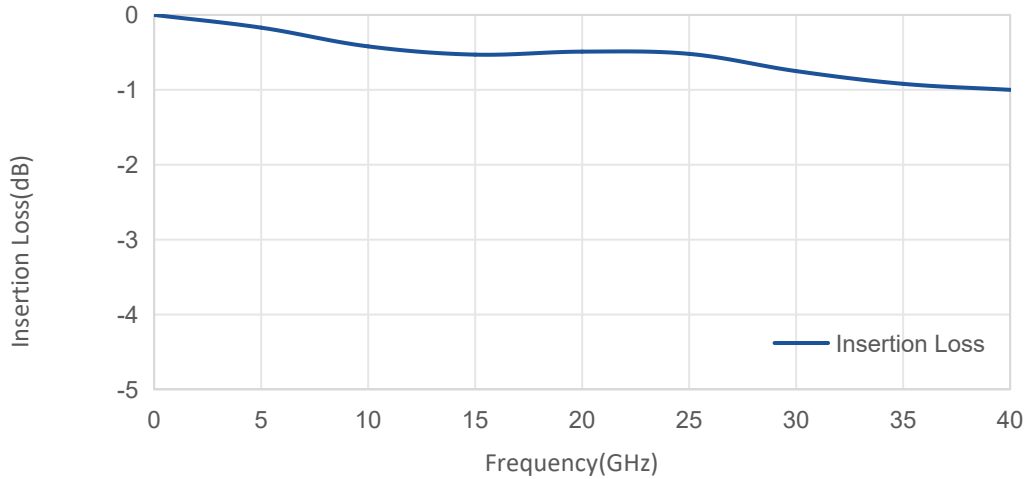

Return Loss vs Frequency

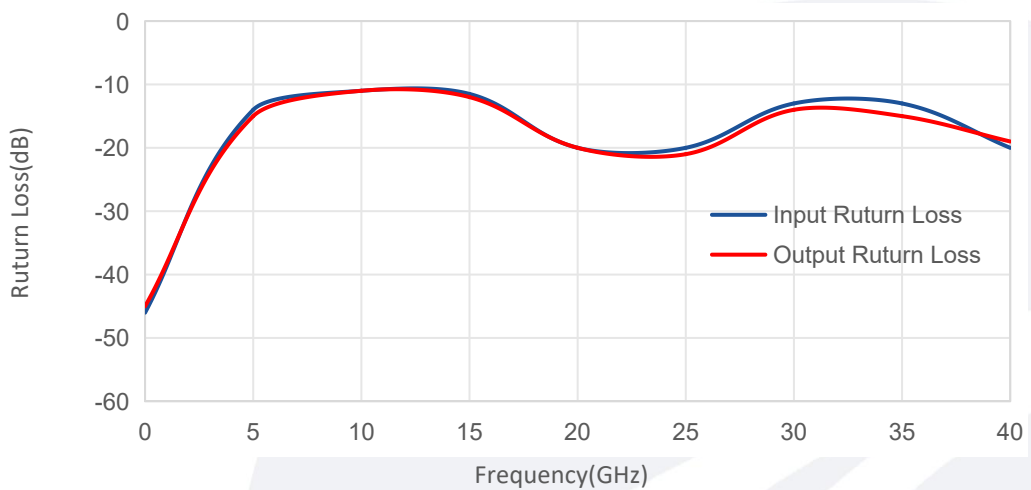

Pout vs Pin

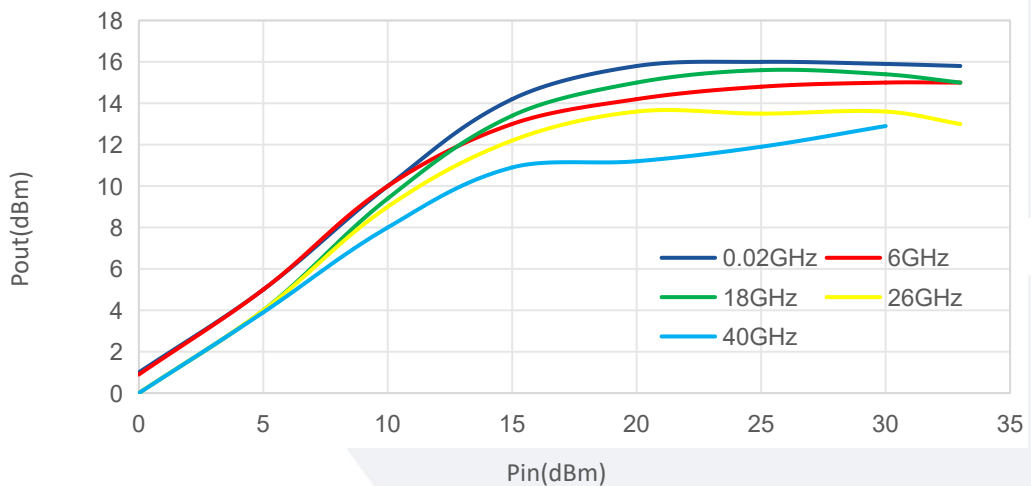

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.