

Coaxial Band-pass Filter

8-14 GHz/SMA Female/SMA Male

Model: TBF-11000-6000-C16

TBF-11000-6000-C16 is a coaxial band-pass filter with a passband frequency from 8 to 14 GHz and a rejection frequencies from 2 GHz to 20 GHz. The maximum insertion loss of the filter is 1.0 dB and the typical rejection is 60 dB.

Features:

- Passband Frequency Range 8 to 14 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	8		14	GHz
带宽 Band Width			6	GHz
通带插损 Passband Insertion Loss			1.0	dB
带内波动 Pass Band Ripple			1.0	dB
带外抑制 Rejection	>60dB@Fc±6Ghz			
耐受功率 Power Handling			15	W
驻波 VSWR			1.8	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA-Female/SMA-Male	

外形图 Outline Drawing:

Unit:mm

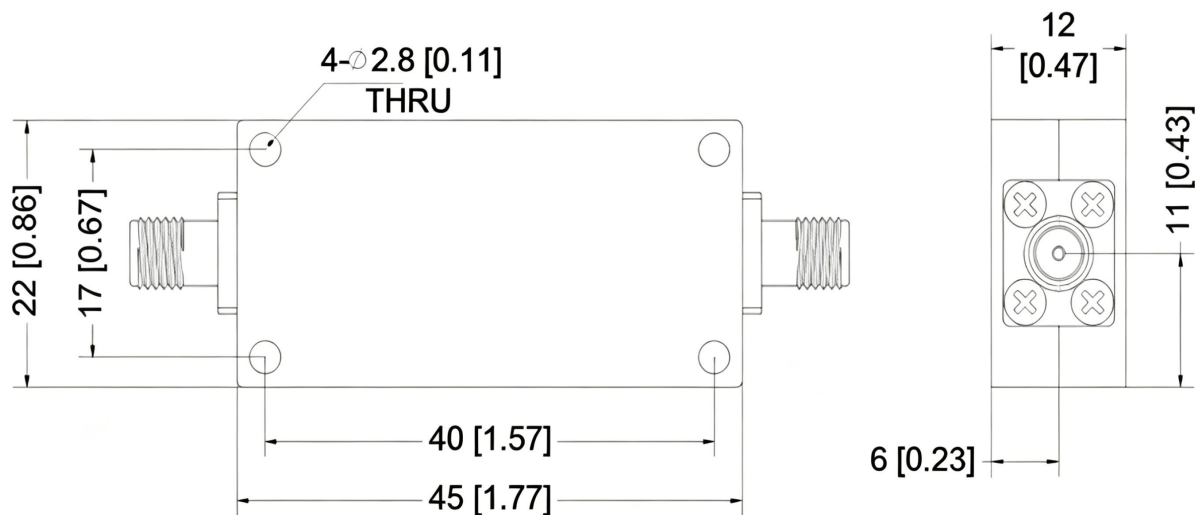


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TBF-11000-6000-C16	Coaxial Band-pass Filter, Passband frequency range: 8-14GHz, Passband Insertion Loss: 1.0dB, SMA Female/SMA Male	Rev.1.0

典型曲线 Typical Performance Data:

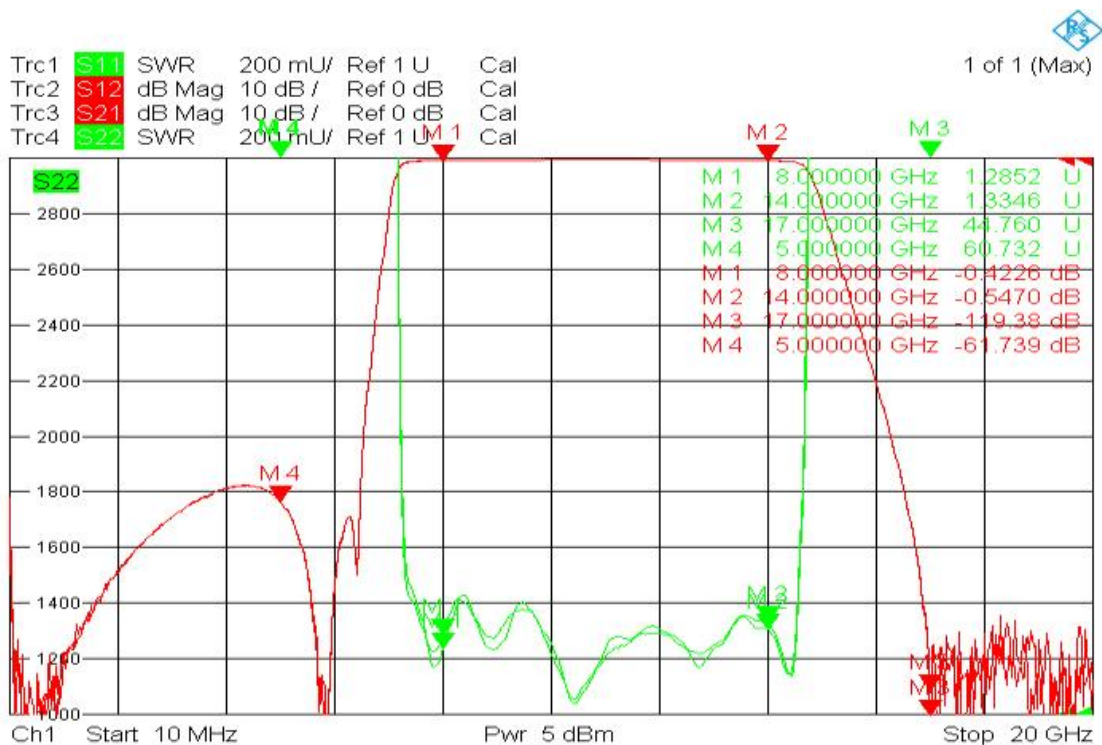

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.