

Coaxial Band-stop Filter

Stopband: 1850-1920MHz

Model: TLRF-1850M-1920M-E

TLRF-1850M-1920M-E is a coaxial band-stop filter with a stop band frequency from 1850 to 1920MHz and a pass band frequency from DC to 1780MHz and 1990 to 4000MHz. The maximum insertion loss of the filter is 1.5 dB and the minimum rejection is 60 dB.

Features:

- Stopband Frequency Range 1850 to 1920MHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
阻带频率范围 Stopband Frequency rang	1850		1920	MHz
通带频率范围 Passband Frequency range	DC-1780 & 1990-4000			MHz
阻带抑制 Stopband Rejection	60			dB
通带插损 Passband Insertion Loss			1.5	dB
通带驻波 Passband VSWR			1.5	:1
耐功率 Power Handling			5	W
阻抗 Impedance		50		Ohms

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
工作温度 Operating Temperature	-20 to +60	°C
输入/输出接口 Input /Output Connector	N Female/N Female	
尺寸 Size	245*47*22	mm

外形图 Outline Drawing: Unit:mm

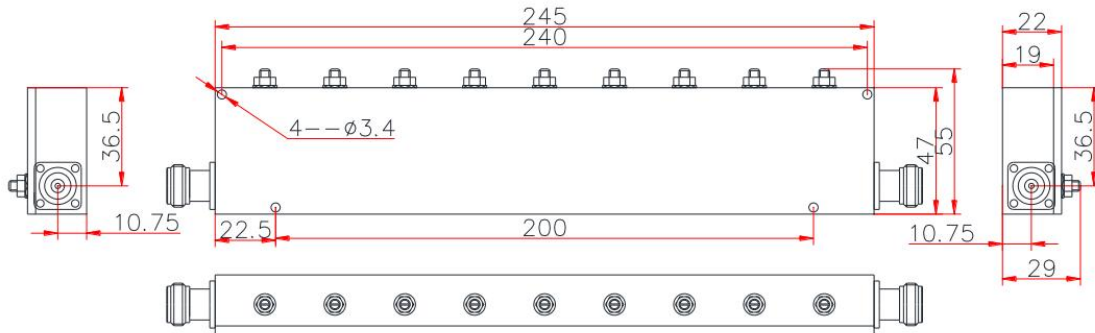

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLRF-1850M-1920M-E	Coaxial Band-stop Filter, Stopband: 2500-2570MHz, Passband: DC-2465MHz&2605-6000MHz, Stopband rejection: 60dB Min	Rev.1.0