

Coaxial Band-pass Filter

9.18-9.58GHz/ SMA Female

Model: TLBF-9G38-400M-E

TLBF-9G38-400M-E is a coaxial band-pass filter with a passband frequency from 9.18 to 9.58GHz and a rejection frequencies at 7.88GHz and 10.88GHz. The nominal insertion loss of the filter is 2.0 dB and the typical rejection is 60 dB.

Features:

- Passband Frequency Range 9.18 to 9.58GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	9.18		9.58	GHz
Passband Insertion Loss			2.0	dB
Pass Band Ripple			1.8	dB
Rejection	≥60dB@10.88GHz @7.88GHz			dB
Power Handling			50	W
Input VSWR			1.8	:1
Output VSWR			1.8	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temperature	-40 to +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm;

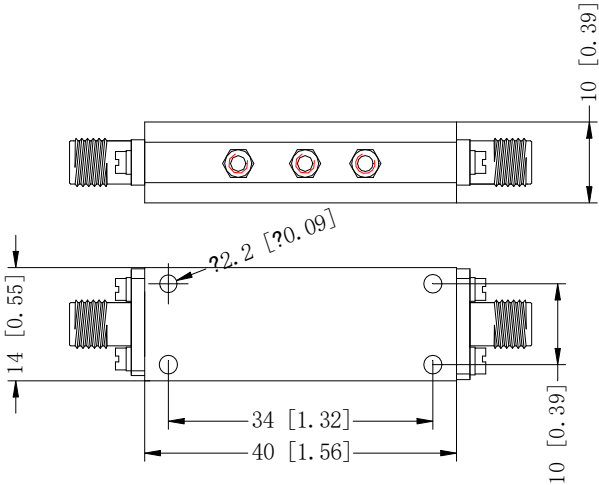


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-9G38-400M-E	Coaxial Band-pass Filter, Passband frequency range: 9.18 to 9.58GHz , Passband Insertion Loss: 2.0dB, SMA Female	Rev.1.0

Typical Performance Data:

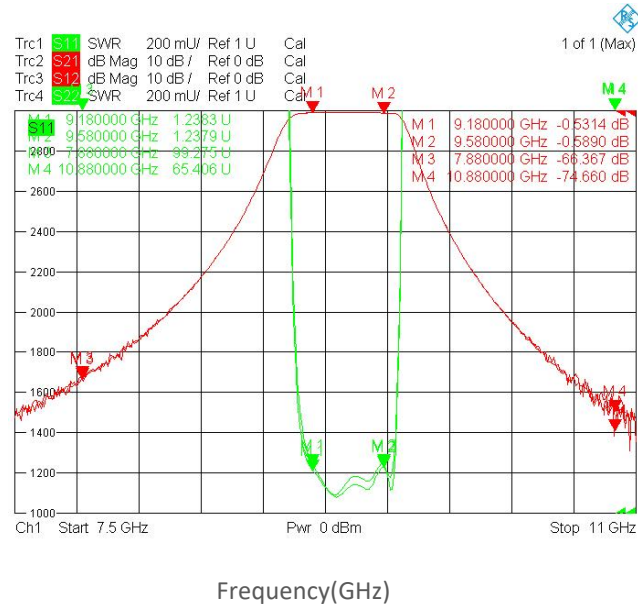

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.