泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Voltage Controlled Phase Shifter

0-360° / 8-18GHz

Model: TLVP8G18G-360

TLVP8G18G-360 is a coaxial voltage-variable shifter providing precise 360° phase control from 8-18 GHz. This model achieves a low insertion loss 7.0dB and a good input return loss -10dB. It features a control bandwidth from 8 to 18GHz and a control voltage range of 0 to +13V. The unit is housed in a compact aluminum alloy case with SMA connectors and a built-in base mounting bracket.

Features:

- Frequency range: 8-18GHz
- High Phase Shift Accuracy
- High Phase Shift Range
- Single Positive Control Voltage

Applications:

- Communications antennas
- Phased array radars

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	8		18	GHz
Phase Range		360		°
Insertion Loss		7	8	dB
Insertion Loss Temperature Coefficient		0.003		dB/℃
Output IM3		40		dBc
Input Return Loss		-10		dB
Output Return Loss		-10		dB
Control Voltage Range	0	13		V
Control Current		5		mA
Phase Flatness		±15		°
Input Power for 0.1dB Compression		20		dBm
Impedance		50		Ohms

Absolute Maximum Ratings :

Parameter	Value	Units
Control Voltage Range	+15V	V
RF Input Power	20	dBm
ESD sensitivity (HBm)	Class 0, passed 150V	


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Envrionmental And Physical Characteristics:

Parameter	Value	Units
Operating Temerature	-40 to +70	℃
Storage Temerature	-55 to +85	℃
Input /Output Connector	SMA Female/SMA Female	
Size	20*14*9.5	mm

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

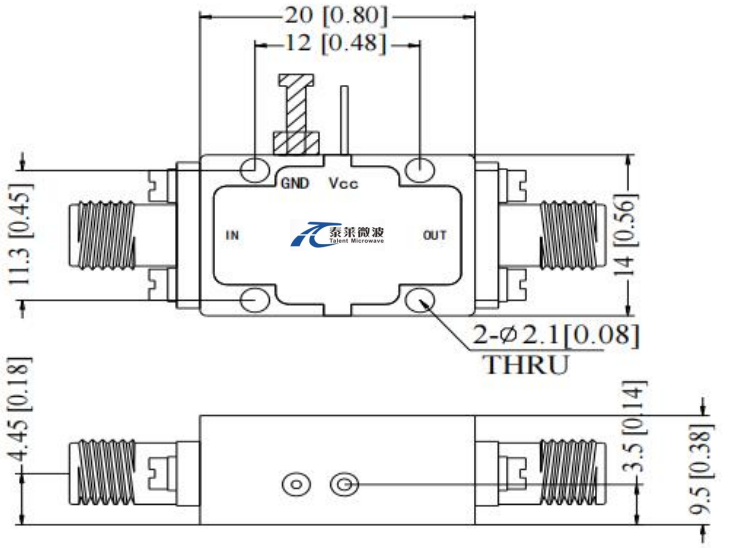

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:


Base Number	Description	Revision
TLVP8G18G-360	Voltage Controlled Phase Shifter ,8-18GHz,SMA Female	Rev.1.1

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Typical Performance Data:

0V-0°:


Input VSWR vs Frequency

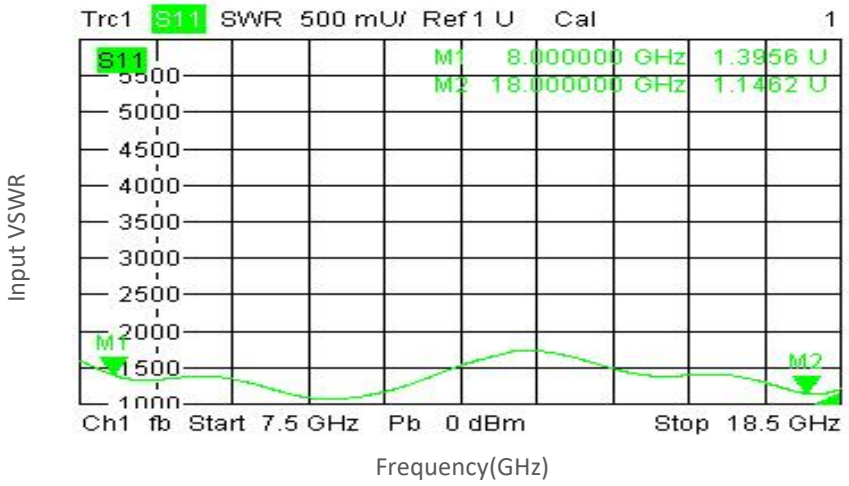

Output VSWR vs Frequency

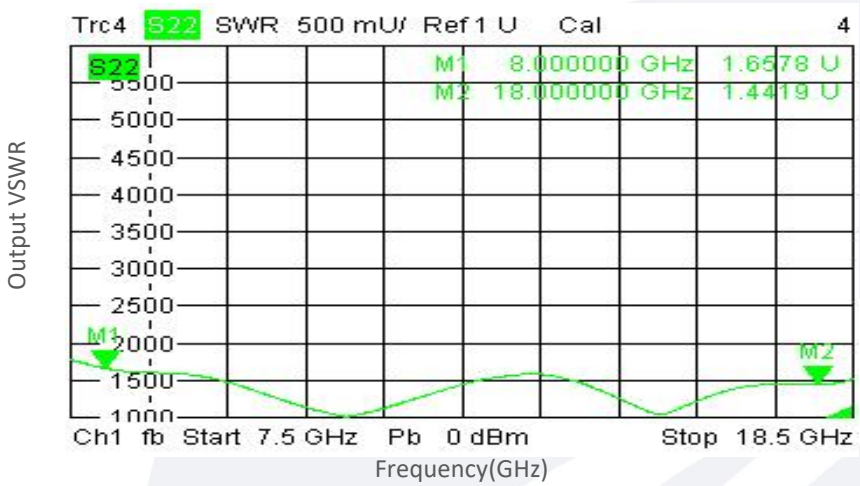

Phase vs Frequency

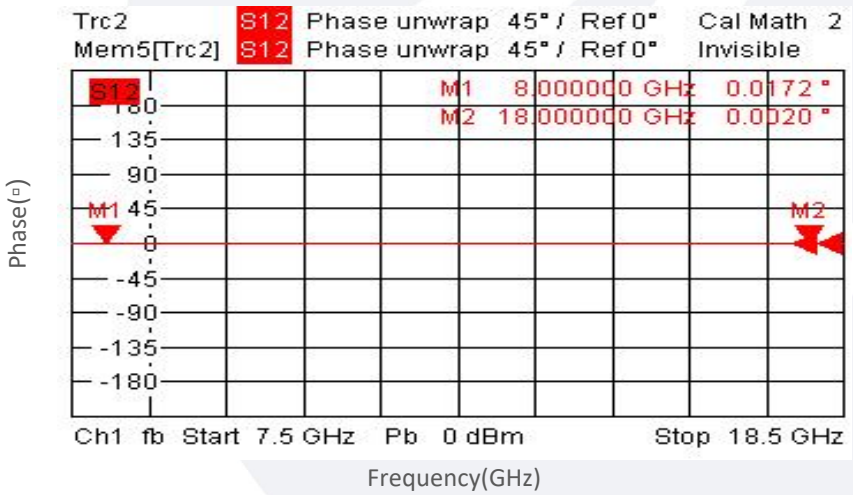


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:


0V-0°:

Insertion Loss vs Frequency

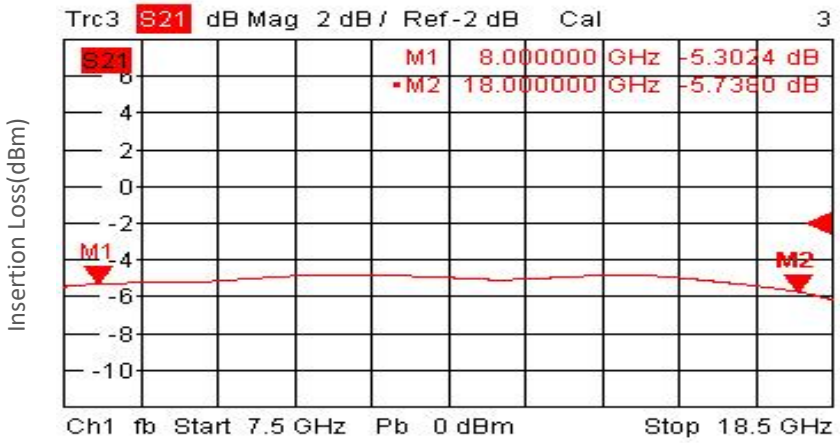


0.12V-12°:

Input VSWR vs Frequency

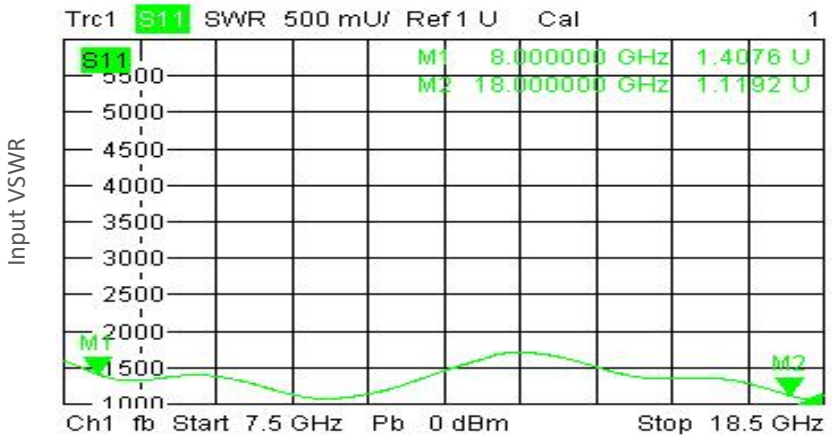

Output VSWR vs Frequency

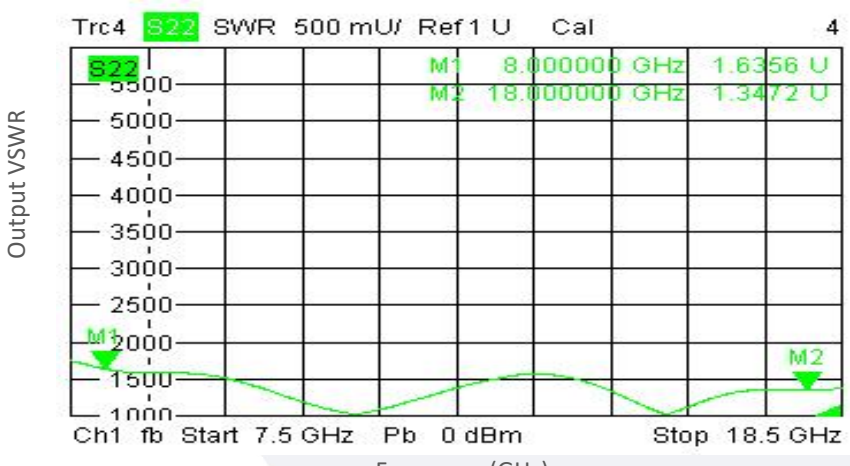


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

0.12V-12°:

Phase vs Frequency

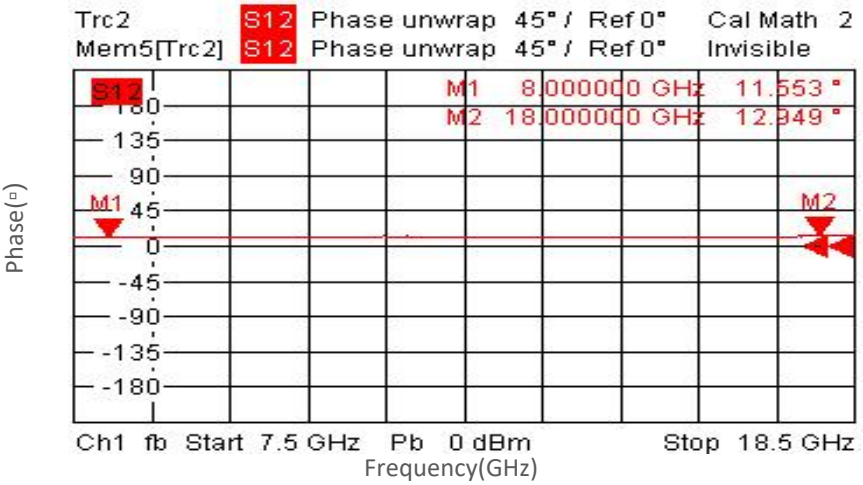


Insertion Loss vs Frequency



0.25V-24°:

Input VSWR vs Frequency

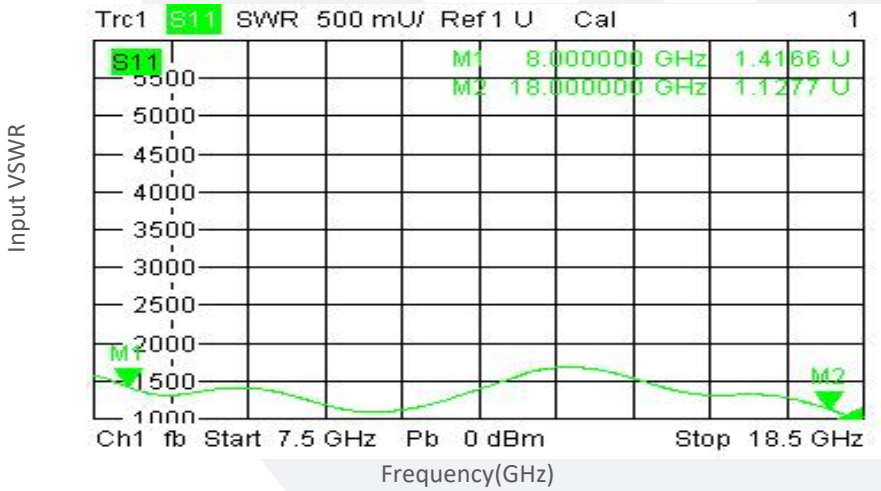


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Typical Performance Data:

0.25V-24°:

Output VSWR vs Frequency

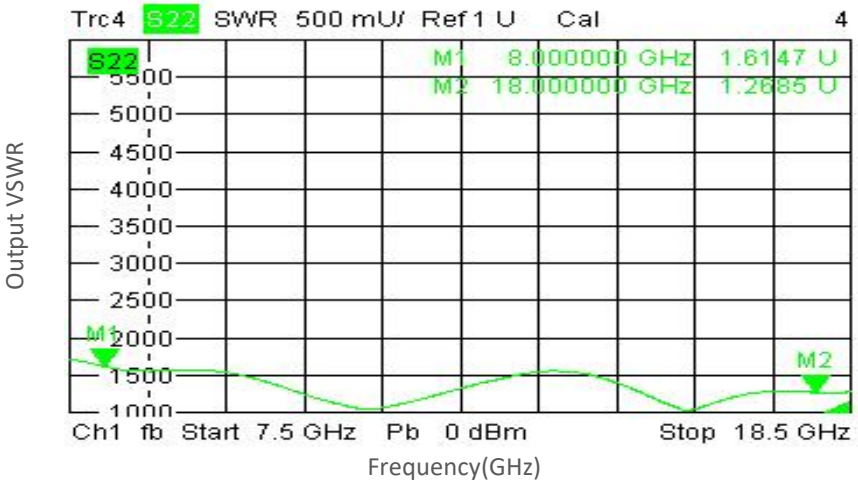

Phase vs Frequency

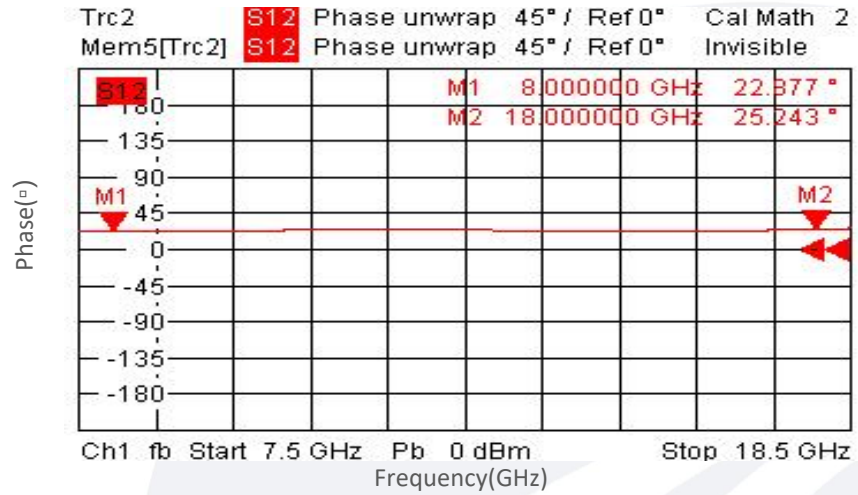

Insertion Loss vs Frequency




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Typical Performance Data:

0.52V-45°:


Input VSWR vs Frequency

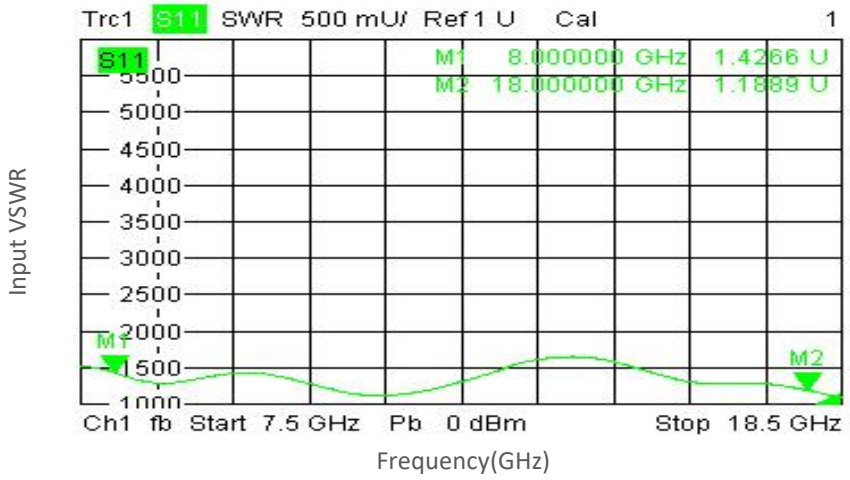

Output VSWR vs Frequency

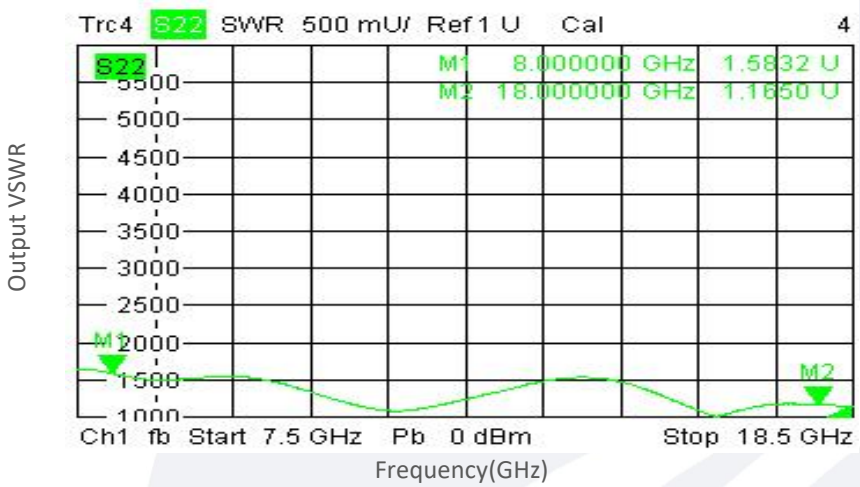

Phase vs Frequency

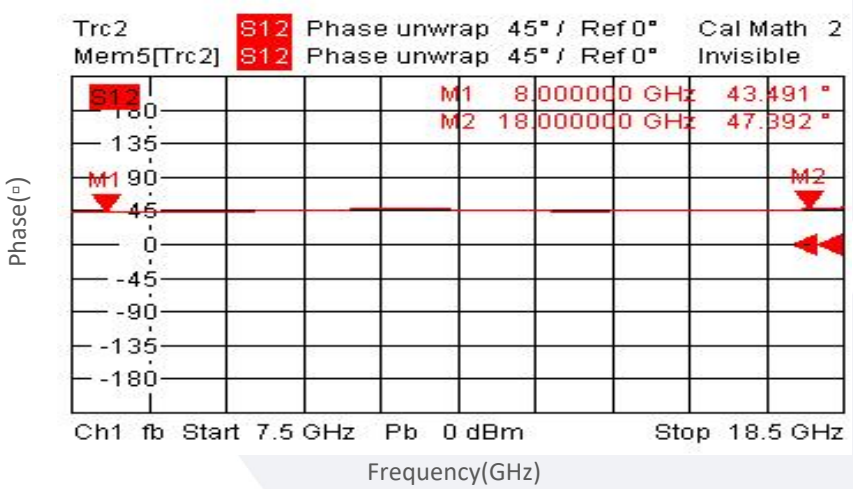


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:


0.52V-45°:

Insertion Loss vs Frequency

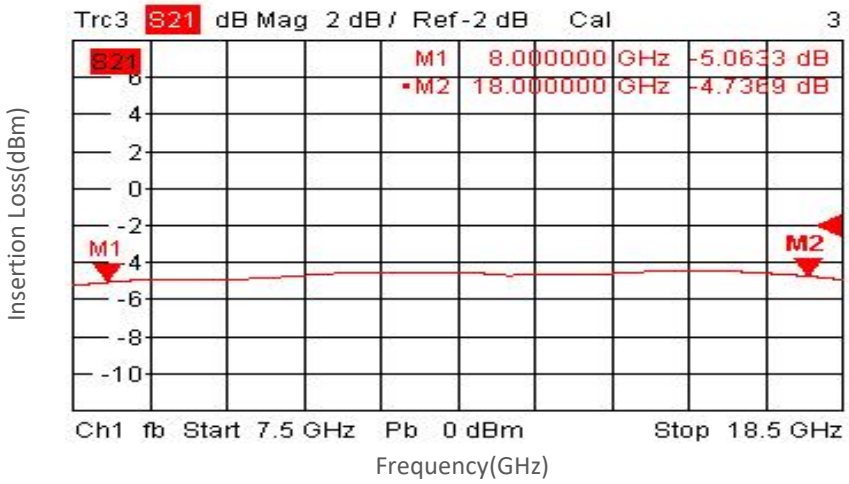


1.26V-90°:

Input VSWR vs Frequency

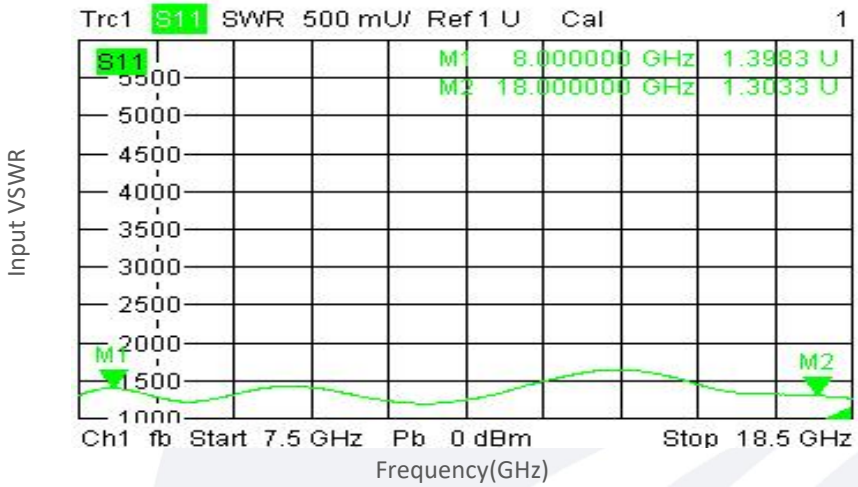

Output VSWR vs Frequency

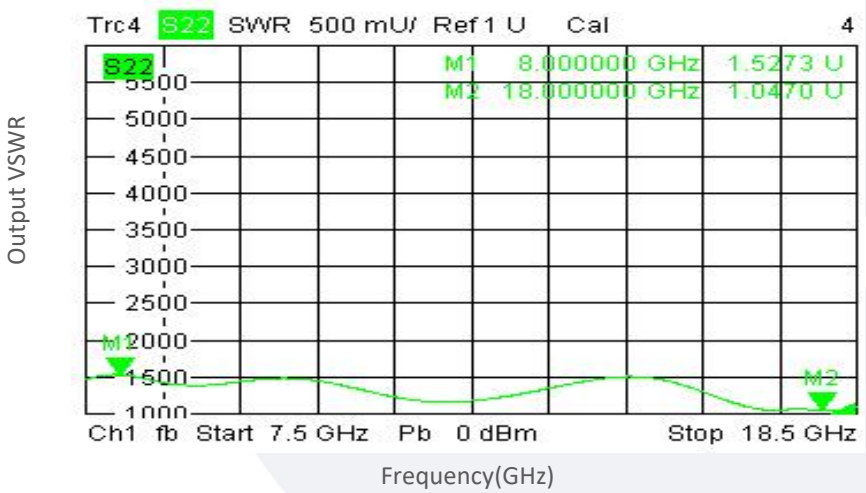



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Typical Performance Data:

1.26V-90°:

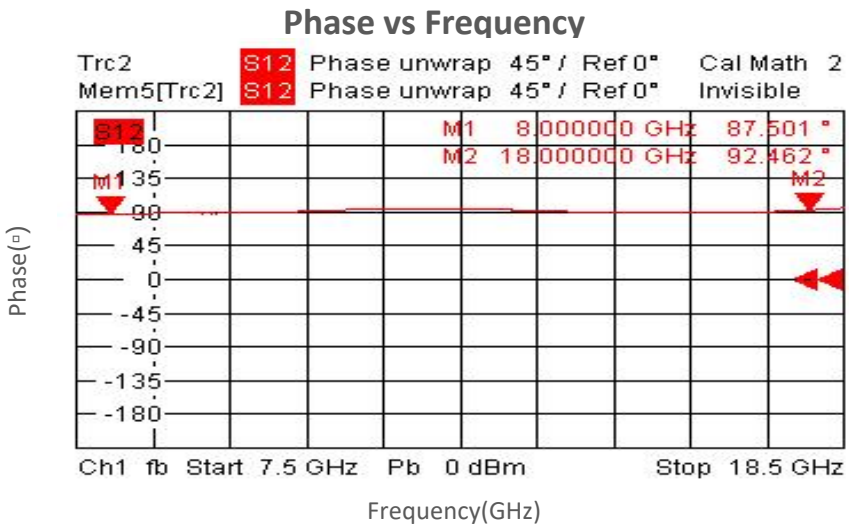

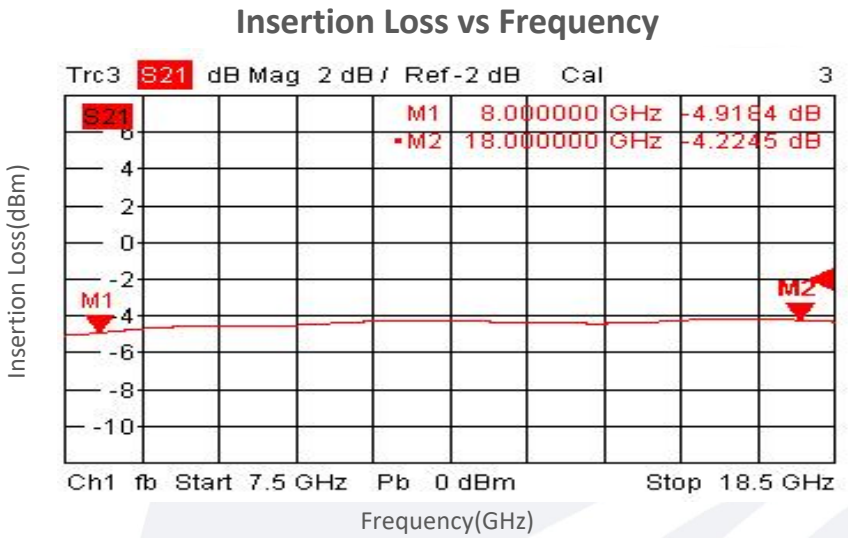

3.29V-180°:

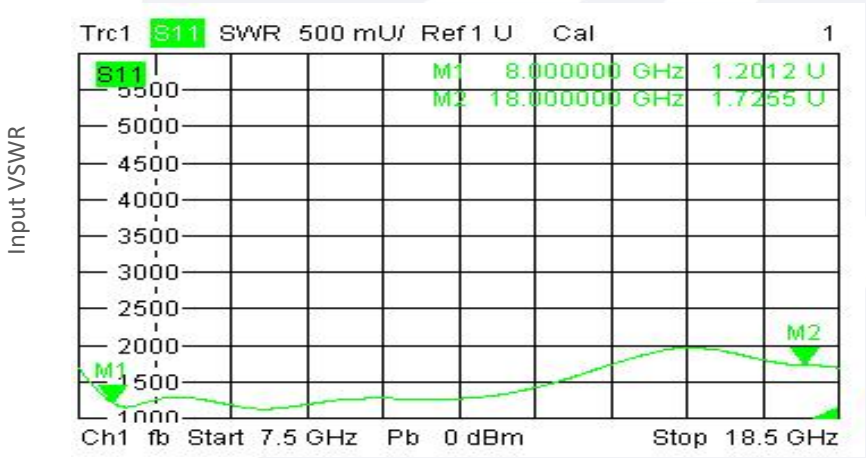


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Typical Performance Data:

3.29V-180°:

Output VSWR vs Frequency

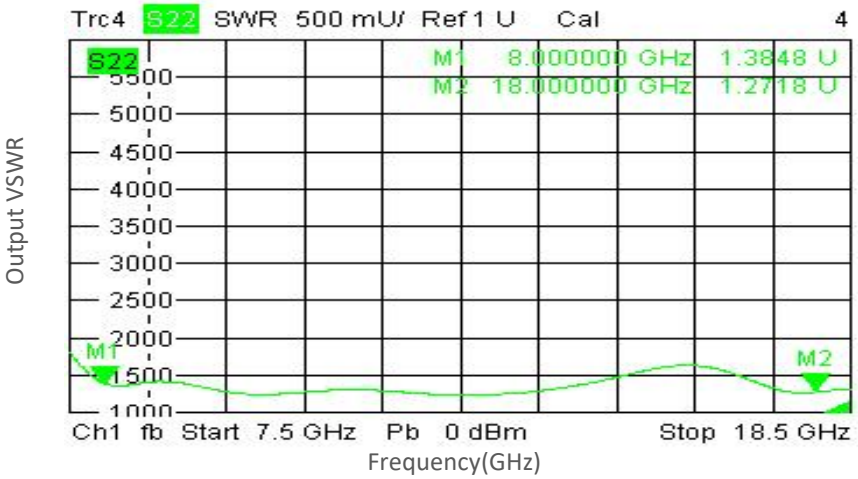

Phase vs Frequency

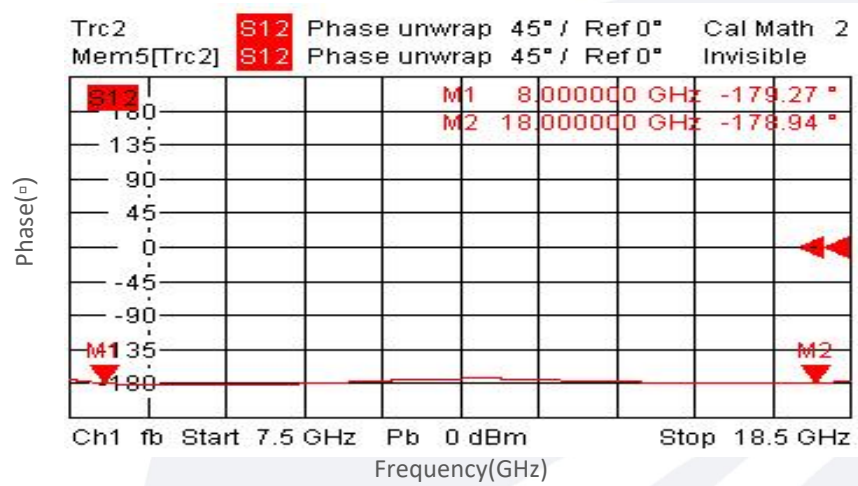

Insertion Loss vs Frequency




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Typical Performance Data:

9.09V-360°:


Input VSWR vs Frequency

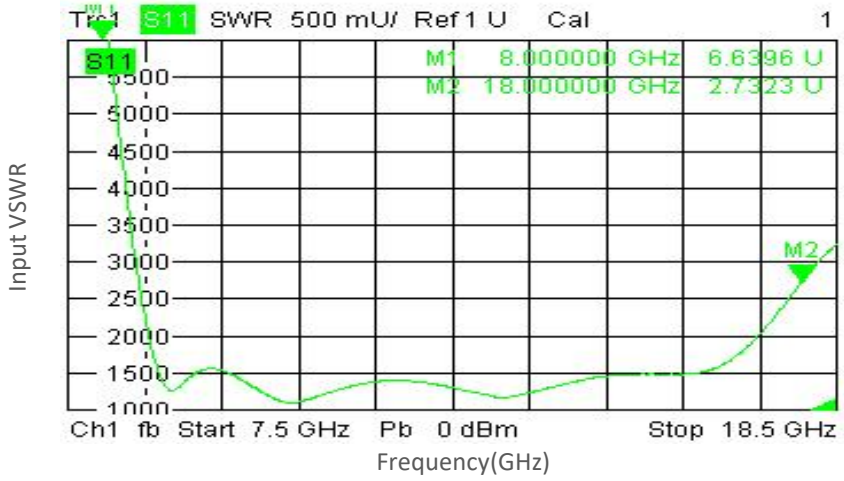

Output VSWR vs Frequency

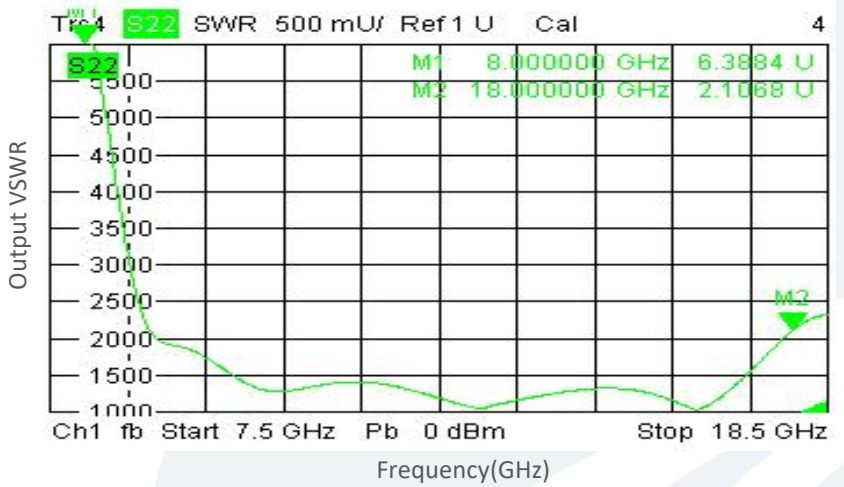

Phase vs Frequency

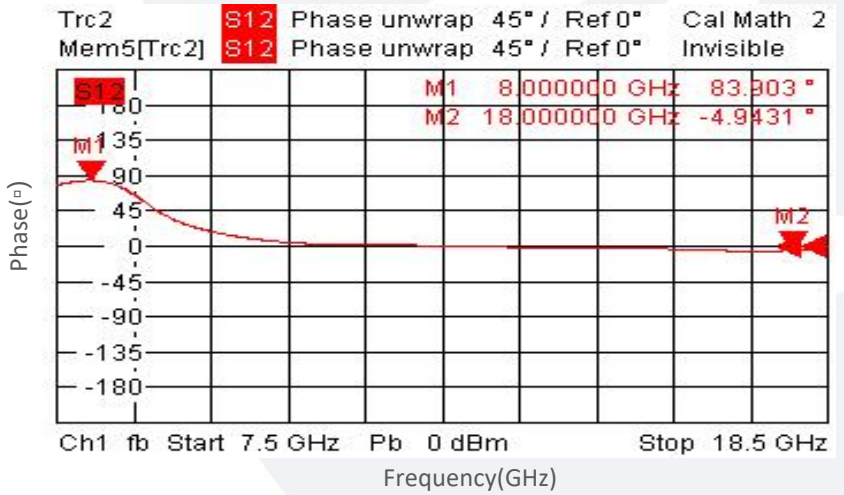

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

9.09V-360°:

Insertion Loss vs Frequency



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.