

Coaxial Band-stop Filter

Stopband: 2570-2620MHz

Model: TLRF-2570M-2620M-E

TLRF-2570M-2620M-E is a coaxial band-stop filter with a stop band frequency from 2570 to 2620MHz and a pass band frequency from DC to 2535MHz and 2655 to 6000MHz. The nominal insertion loss of the filter is 1.5 dB and the minimum rejection is 60 dB.

Features:

- Stopband Frequency Range 2570 to 2620MHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Stopband Frequency rang	2570		2620	MHz
Passband Frequency range	DC-2535 & 2655-6000			MHz
Stopband Rejection	60			dB
Passband Insertion Loss		1.5	2	dB
Passband VSWR			1.5	:1
Power Handling			30	W
Impedance		50		Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-20 to +60	°C
Input /Output Connector	SMA Female/SMA Female	
Size	209*37*22	mm

Outline Drawing:

Unit:mm

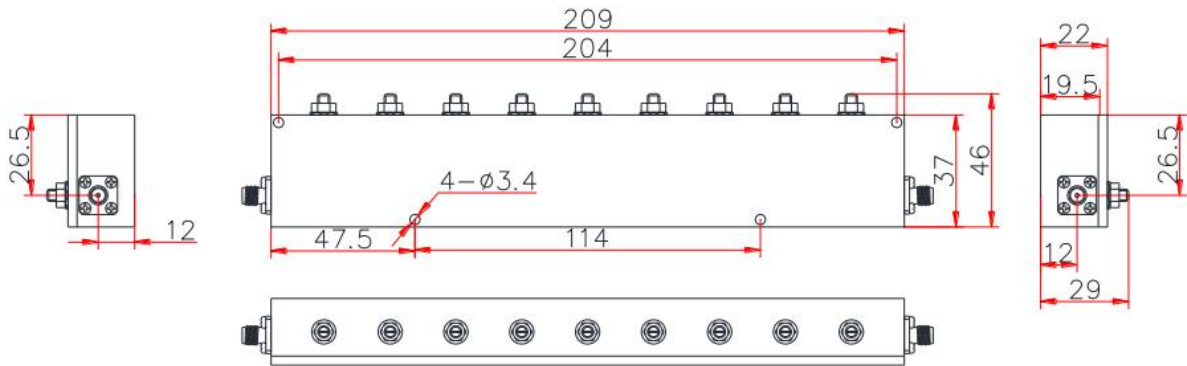

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLRF-2570M-2620M-E	Coaxial Band-stop Filter, Stopband: 2570-2620MHz, Passband: DC-2535MHz&2655-6000MHz, Stopband rejection: 60dB Min	Rev.1.0