

Model: TMLA-100160-1850-06

Terahertz Low Noise Amplifier
100-160GHz, NF:5.0 dB, Gain:18 dB

Feature:

- Ultra Wide Band: 100-160 GHz
- Gain: 18dB Typ
- Noise Figure:5.0dB Typ
- Unconditional stability

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	100		160	GHz
Gain		18		dB
Noise Figure		5		dB
Output P1dB		-2		dBm
Input VSWR		3		:1
Output VSWR		2.5		:1
DC Voltage		+5		V DC
DC power supply		40		mA

Mechanical Specifications:

Parameter	Value	Units
Input Connector	WR-06/ UG-387/U	
Output Connector	WR-06/ UG-387/U	
Power Supply Pin	Solder Pin	
Size	/	mm

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+5 V
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V



**Available 220V System
Benchtop Amplifier**

Outline Drawing:

Unit: Inches(mm)

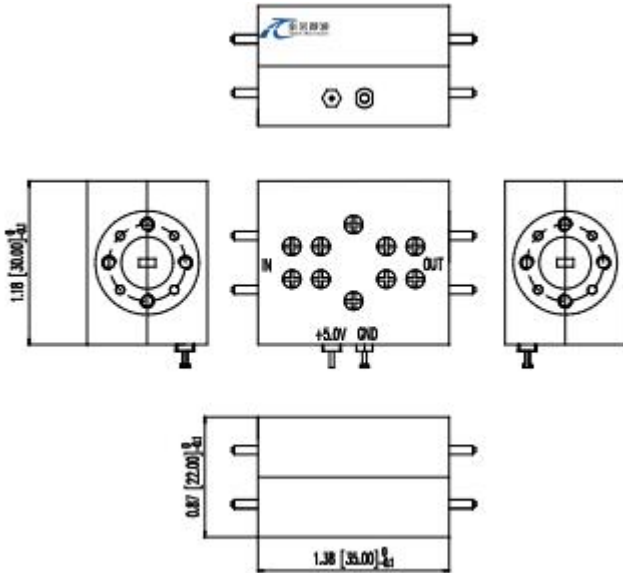

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-55		+85	°C
Non-operating Temperature	-45		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TMLA-100160-1850-06	Low Noise Amplifier,100-160GHz, Noise Figure:5.0dB, Gain:18dB,+5V DC,WR-06	Rev.1.1