

Adjustable Phase Shifter

DC-8GHz/3.5mm Female

Model: TLMP5-8G-180-S

TLMP5-8G-180-S is a phase shifters is adjustable passive microwave devices designed for RF applications. TLMP5-8G-180-S have a phase range of 0° to 180° and a phase adjustment of 4.8° per GHz.

Features:

- Operating Frequency DC to 8GHz
- High phase adjustmant accuracy
- Low insertion loss

Applications:

- laboratory test
- Communication equipment

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	DC		8	GHz
Power Handling		50		W
Impedance		50		Ohms
Apply 1	Assemble semi-rigid cable, set one channel of phase adjustment range from 0~180°			
VSWR		1.5	1.55	:1
Insertion Loss		1.4	1.5	dB
Phase adjustment range	0		180	°/GHz
Phase Sensitivity		4.8 x f(GHz)		°/Circle
Group Delay		500		ps
Apply 2	Assemble semi-rigid cable, set one channel of phase adjustment range from 0~90°			
VSWR		1.25	1.35	:1
Insertion Loss		0.6	0.7	dB
Phase adjustment range	0		90	°/GHz
Phase Sensitivity		2.4 X f(GHz)		°/Circle
Group Delay		250		ps

Environmental And Physical Characteristics:

Description	Parameter	Units
Connectors	3.5mm Female/3.5mm Female	
Size	180*100*26.8	mm

Outline Drawing:

Unit:mm

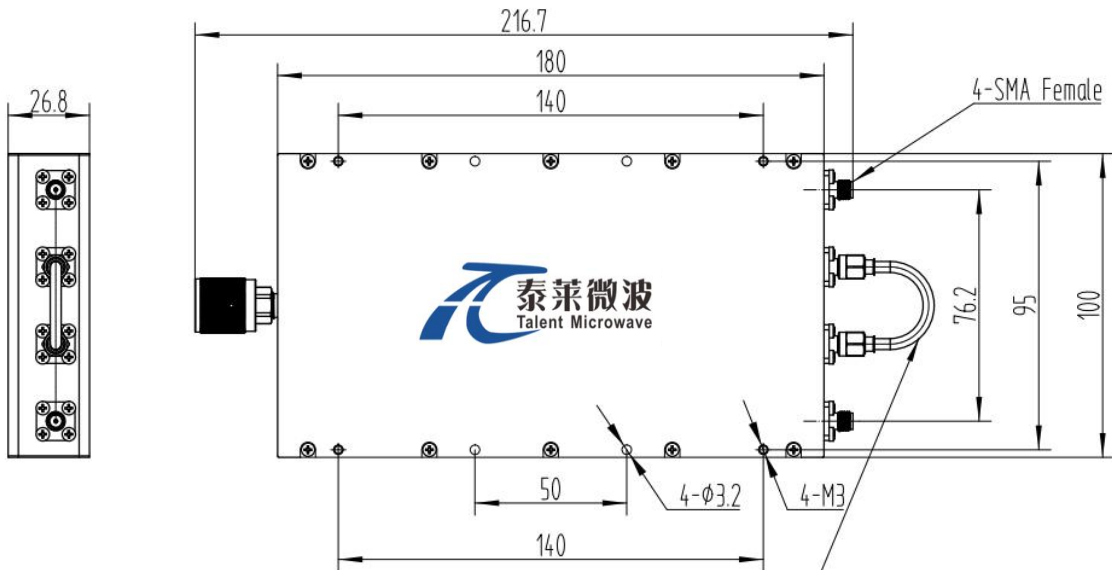

The phase adjustment range of this semi-rigid assembly is 180° at 1 GHz.
After removal, it can be divided into two groups, with a phase adjustment range of 90° at 1 GHz.


Ordering Information:

Base Number	Description	Revision
TLMPS-8G-180-S	Adjustable Phase Shifter, DC-8GHz,Phase adjustment: 4.8° per GHz.	Rev.1.0

Typical Performance Data:


0° :

VSWR&Phase&Group Delay vs Frequency

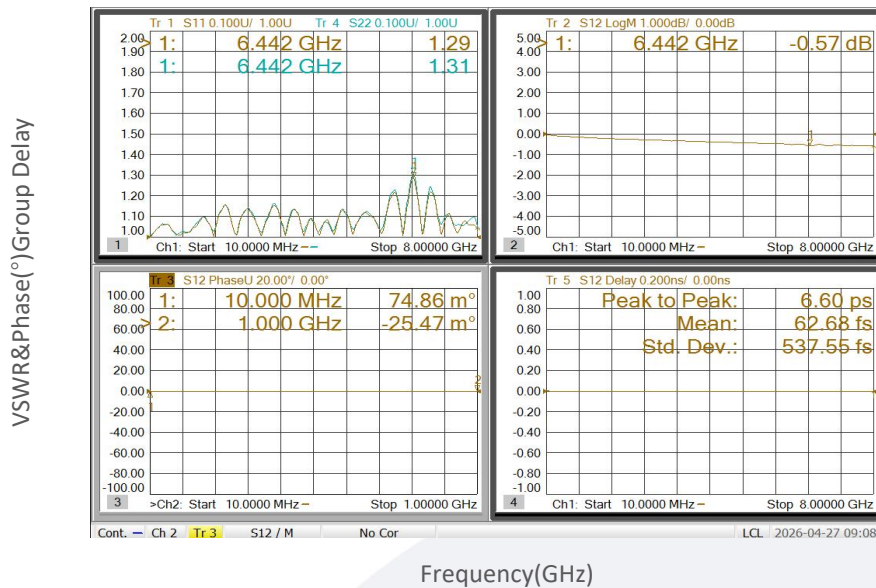

90° :

VSWR&Phase&Group Delay vs Frequency

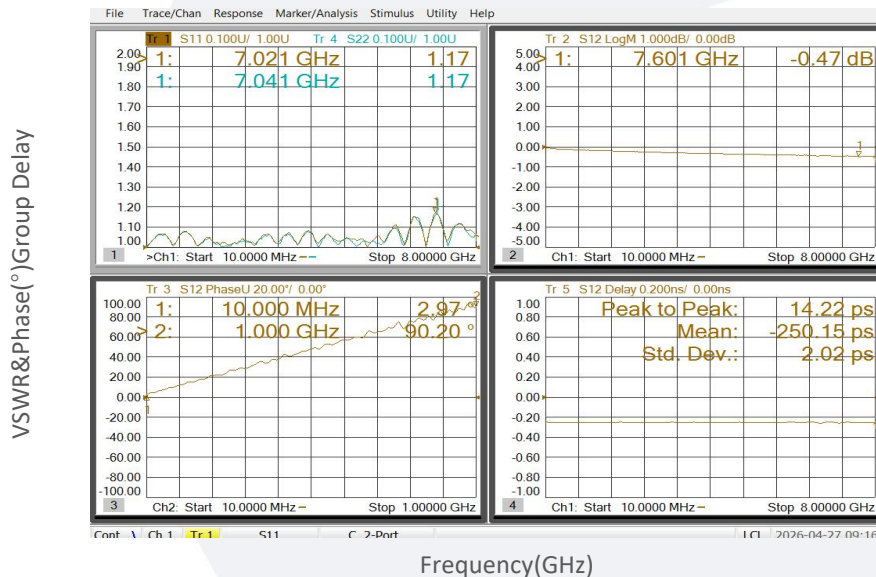


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


0° :

VSWR&Phase&Group Delay vs Frequency

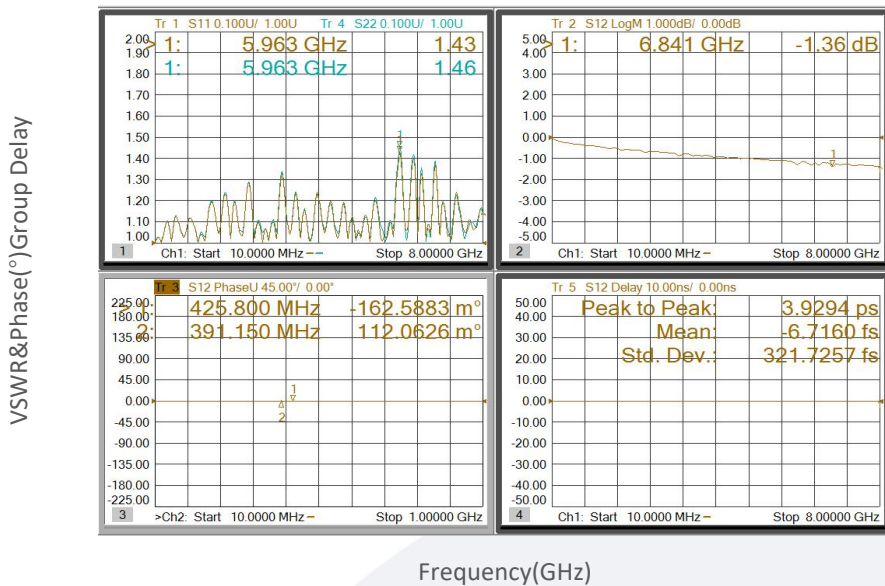

180° :

VSWR&Phase&Group Delay vs Frequency

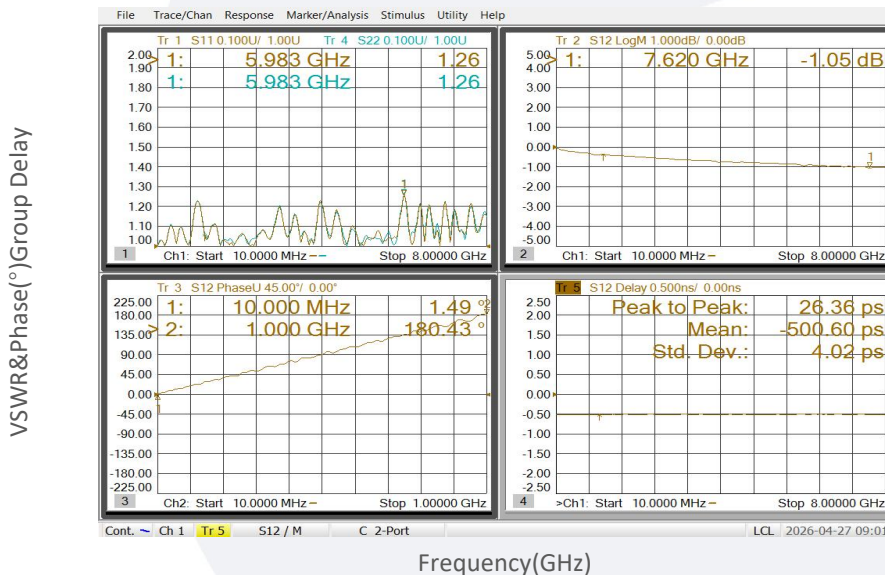

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.