

Model: TMLA-210260-1970-04
Low Noise Amplifier
210-260GHz, NF:7.0 dB, Gain:19dB
Feature:

- Ultra Wide Band: 210-260 GHz
- Gain: 19dB Typ
- Noise Figure:7.0dB Typ
- Unconditional stability

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	210		260	GHz
Gain		19		dB
Noise Figure		7		dB
Input VSWR		2.5		:1
Output VSWR		3.5		:1
DC Voltage		+5		V DC
DC power supply		43		mA

Mechanical Specifications:

Parameter	Value	Units
Input Connector	WR-04/ UG-387/U	
Output Connector	WR-04/ UG-387/U	
Power Supply Pin	Solder Pin	
Size	35*30*30	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+5 V
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
 Benchtop Amplifier**

Outline Drawing:

Unit: Inches(mm)

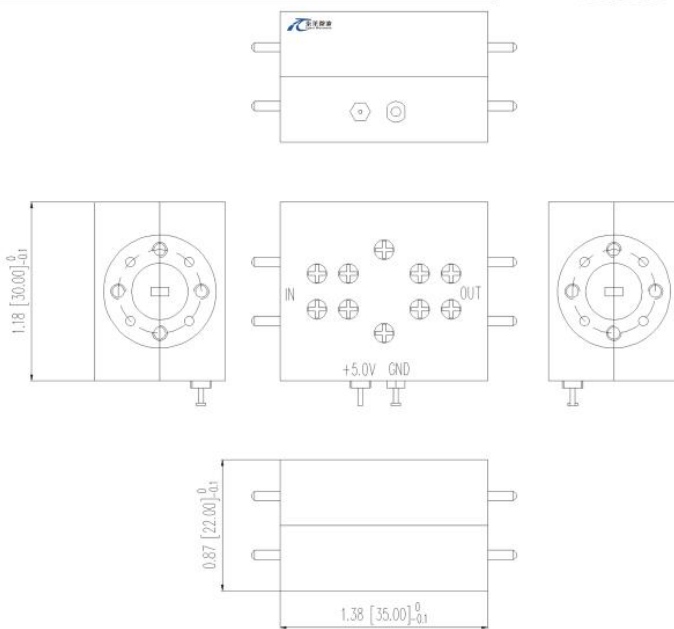

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-55		+85	°C
Non-operating Temperature	-45		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TMLA-210260-1970-04	Low Noise Amplifier,210-260GHz, Noise Figure:7.0dB, Gain:19dB,+5V DC,WR-04	Rev.1.1

Typical Performance Data:

Gain vs Frequency

