

Model: TMPA-110150-3515-06
Power Amplifier
110-150 GHz, Gain:35 dB,Psat:15 dBm
Feature:

- Frequency Range:110-150 GHz
- Gain:35 dB Typ
- Output Power Psat:15 dBm Typ
- Good Power and Gain Flatness

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	110-150			GHz
Gain		35		dB
Output Psat		15		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		5		V DC
DC Supply Current		400		mA

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	WR-06/UG-387/U	
DC Bias	Solder Pin	
Size	50*30*22	mm
Weight	/	g


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	11dBm
ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
 Benchtop Amplifier**

Outline Drawing:

Unit: mm(Inches)

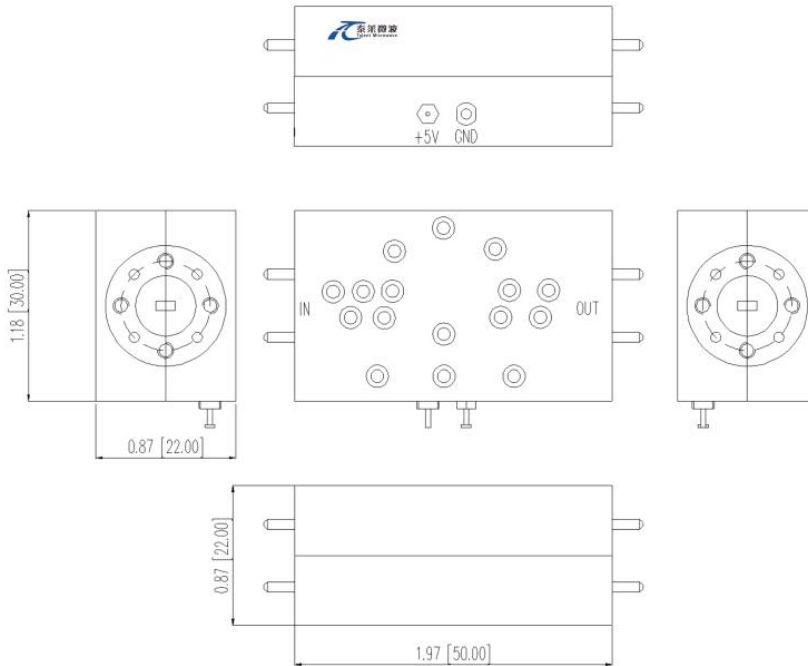

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	0		+50	°C
Non-operating Temperature	-45		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Part Number	Description	Revision
TMPA-110150-3515-06	Power Amplifier,110-150 GHz, Gain:35 dB Typ,Psat:15 dBm Typ,5V DC,WR-06	Rev.1.1

Typical Performance Data:


Gain vs Frequency

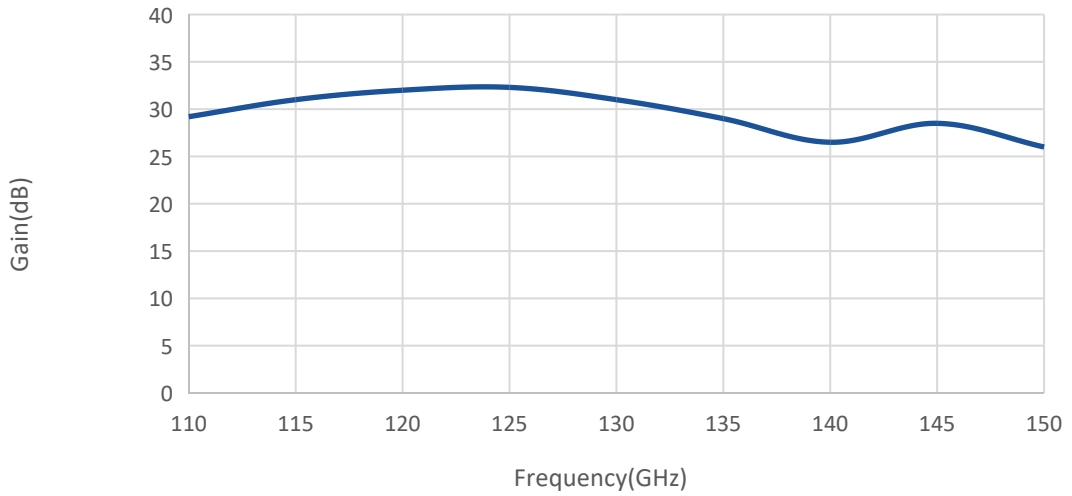

VSWR vs Frequency

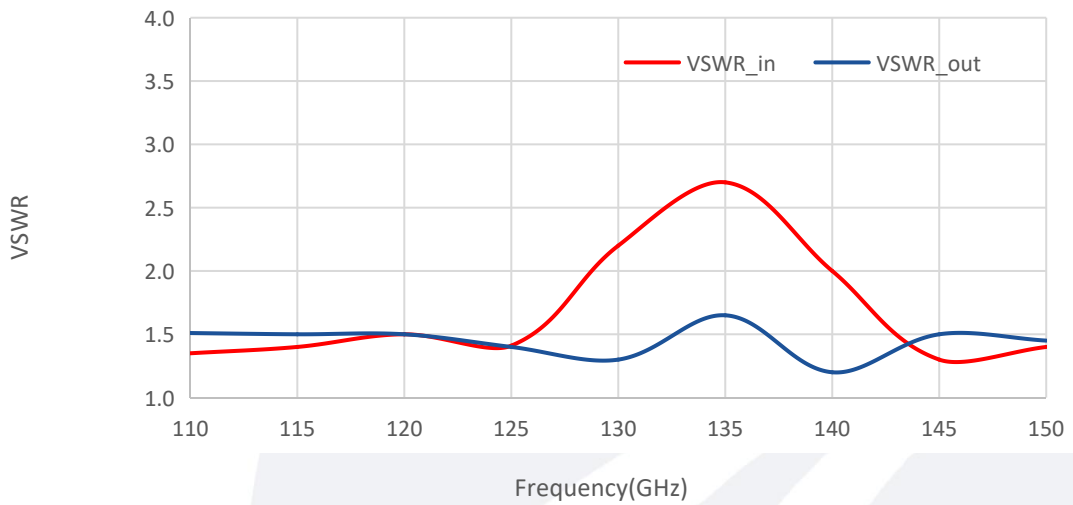

Psat vs Frequency

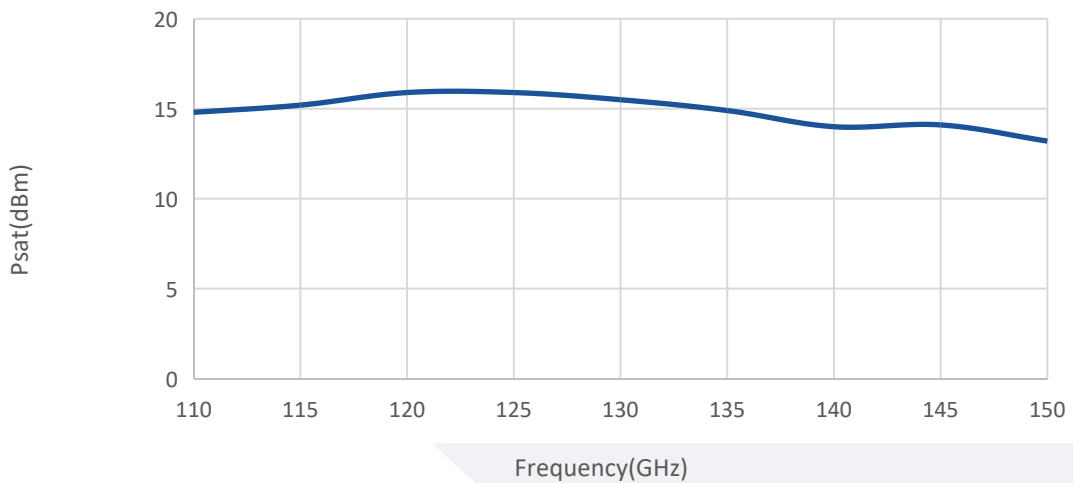

Typical Performance Data:

I vs Frequency

