

## Waveguide to Coax Adapter, End Launch WR19/1.85mm Male/40-60GHz

**Model: TL-19WCA1.85ME**

The TL-19WCA1.85ME is end launch waveguide to coax adapters that cover the frequency range of 40 to 60 GHz. It is designed for an efficient transition between the rectangular waveguide and 1.85 mm coax connector.

### Features:

- Operating Frequency 40 to 60GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

### Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

### Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	40		60	GHz
VSWR		1.3		:1
Insertion Loss		0.4		dB

### Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-40 To +85	°C
Storage Temperature	-40 to +85	°C
Material	Copper	
Finish	Gold Plated	
Coax Connector	1.85mm Male	
Waveguide	WR19/UG-383/U-M	
Size	17.8* $\phi$ 28.55	mm

Outline Drawing:

Unit:mm

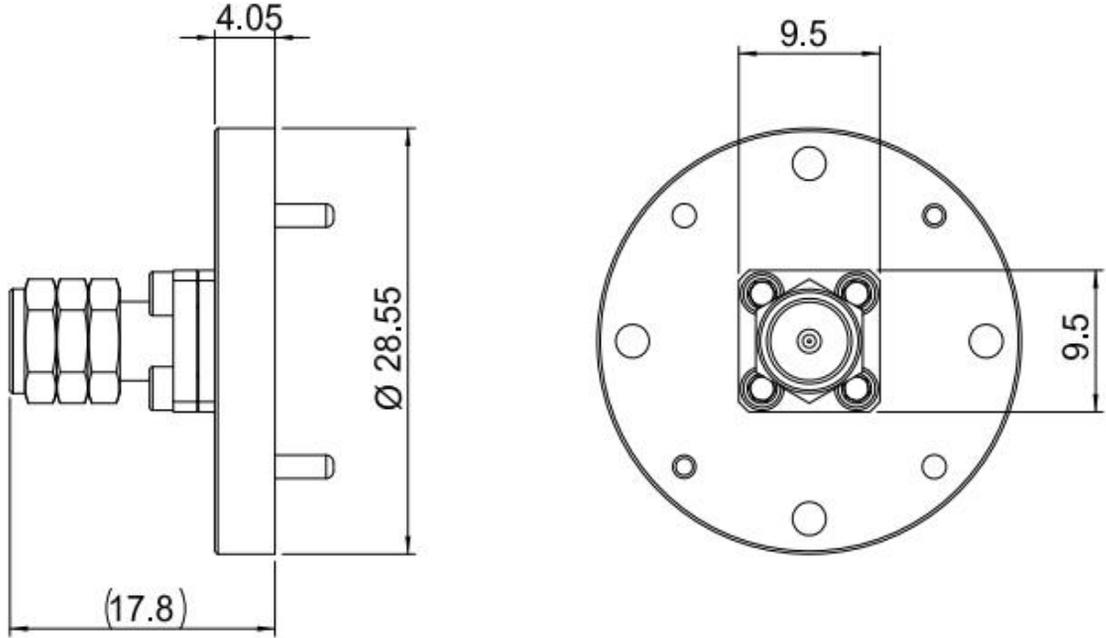

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

**Ordering Information:**

Base Number	Description	Revision
TL-19WCA1.85ME	Waveguide to Coax Adapter, End Launch WR19/1.85mm Male,40-60GHz	Rev.1.0