

Waveguide to Coax Adapter, End Launch

WR-08/0.8mm Male/90-140GHz

Model: TL-08WCA0.8ME

The TL-08WCA0.8ME is end launch waveguide to coax adapters that cover the frequency range of 90 to 140GHz. It is designed for an efficient transition between the rectangular waveguide and 0.8 mm coax connector.

Features:

- Operating Frequency 90 to 140GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	90		140	GHz
Insertion Loss		1		dB
VSWR		1.6		:1
Power Handling			2	W

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Material	Aluminum	
Finish	Gold Plated	
Coax Connector	0.8mm Male	
Waveguide	WR-08/UG-387/U-M	

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

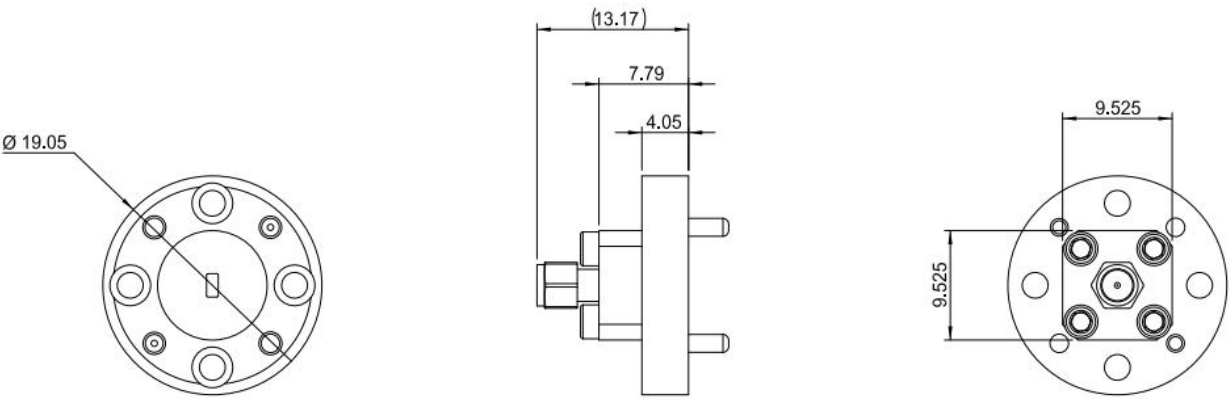

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TL-08WCA0.8ME	Waveguide to Coax Adapter, End Launch WR-08/0.8mm Male,90-140GHz	Rev.1.0