

Waveguide to Coax Adapter, End Launch

WR-12/1.0mm Male/60-90GHz

Model: TL-12WCA1.0ME

The TL-12WCA1.0ME is end launch waveguide to coax adapters that cover the frequency range of 60 to 90 GHz. It is designed for an efficient transition between the rectangular waveguide and 1.0 mm coax connector.

Features:

- Operating Frequency 60 to 90GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies



Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	60		90	GHz
Insertion Loss		0.6	1	dB
VSWR		1.3		:1
Power Handling			10	W

Envrionmental And Physical Characteristics:

Parameter	Description	Units
Operating Temerature	-40 To +85	°C
Storage Temerature	-40 to +85	°C
Material	Aluminum	
Finish	Gold Plated	
Coax Connector	1.0mm Male	
Waveguide	WR-12/UG-387/U-M	

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

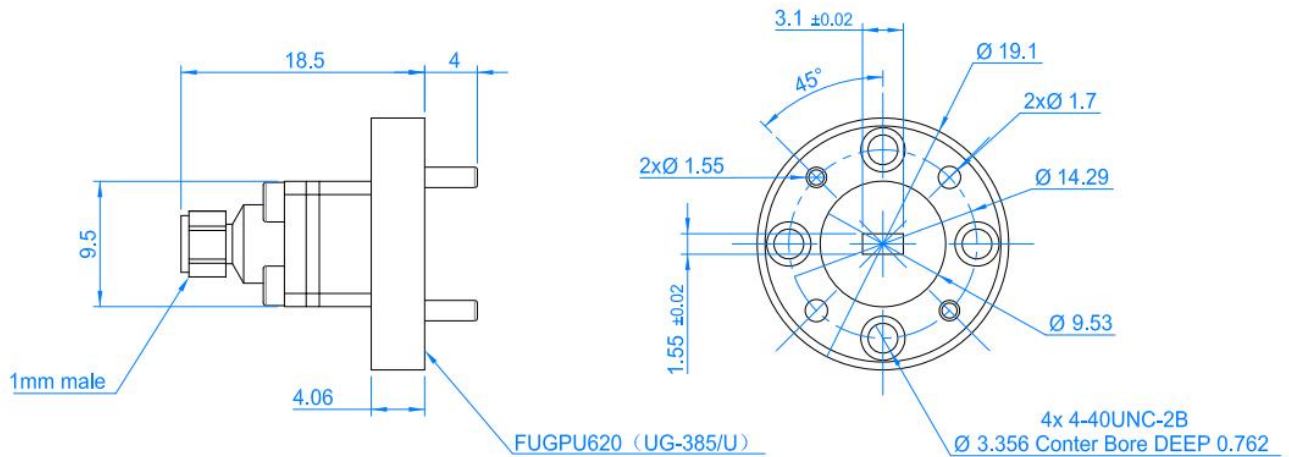


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:


Base Number	Description	Revision
TL-12WCA1.0ME	Waveguide to Coax Adapter, End Launch WR-12/1.0mm Male, 60-90GHz	Rev.1.0

Typical Performance Data:

VSWR vs Frequency

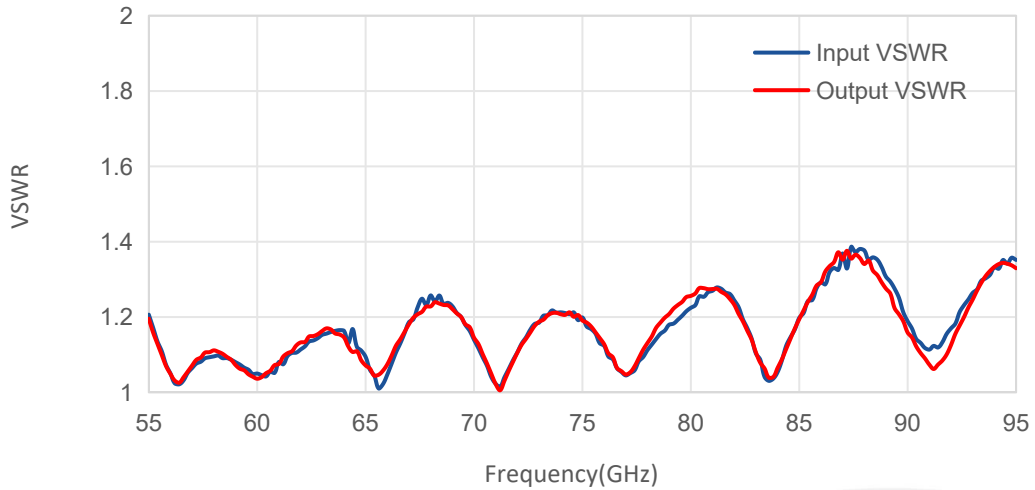

Insertion Loss vs Frequency

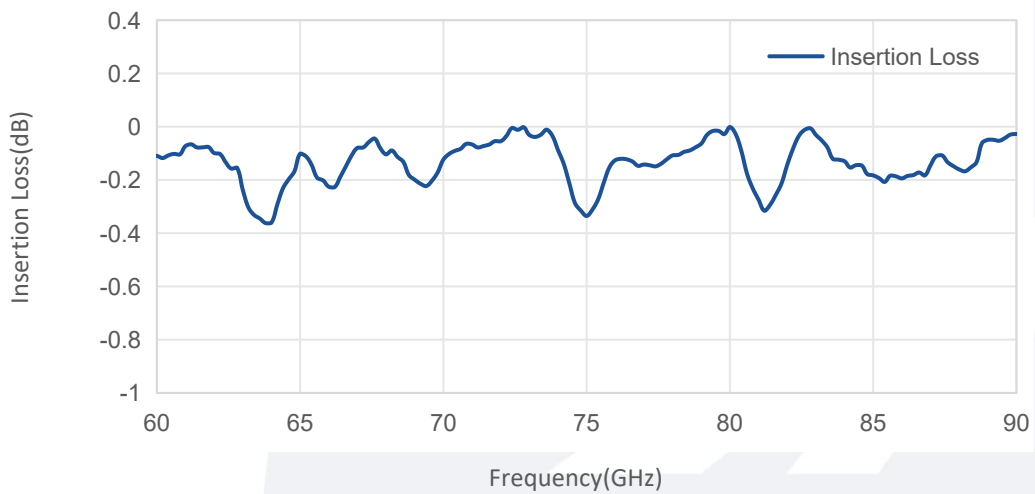

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.