泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
+86-0512-62657975
sales@talentmw.com
www.talentmw.com

Model:TLPA10M1000M-38-36

Power Amplifier 10-1000MHz,Gain:38dB,Psat:36dBm

Feature:

- Ultra Wide Band: 10-1000MHz
- Gain:38dB Min
- Psat Output Power:36dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range		10-1000		MHz
Gain	36	38	39	dB
Gain Flatness		±1	±1.5	dB
Output P1dB	35	36		dBm
Output Psat	36	37		dBm
Input VSWR		1.5	2	:1
DC Voltage		+28		V DC
DC Supply Current		1.5		A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	90*48*15	mm
Weight	150	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+30V
RF Input Power	3dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Available 220V System Benchtop Amplifier

Suzhou Talent Microwave,Inc
+86-0512-62657975
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit: mm

***Heat Sink Required During Operation

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	℃
Non-operating Temperature	-55		+125	℃
Relative humidity		95		%
Altitude	30,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TLPA10M1000M-38-36	Power amplifier 10-1000MHz,Gain:38dB,Psat:36dBm,+28V DC,Without Heatsink.	Rev.1.0
TLPA10M1000M-38-36-HS	Power amplifier 10-1000MHz,Gain:38dB,Psat:36dBm,+28V DC,With Heatsink.	Rev.1.0

泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
+86-0512-62657975
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

Input VSWR vs Frequency

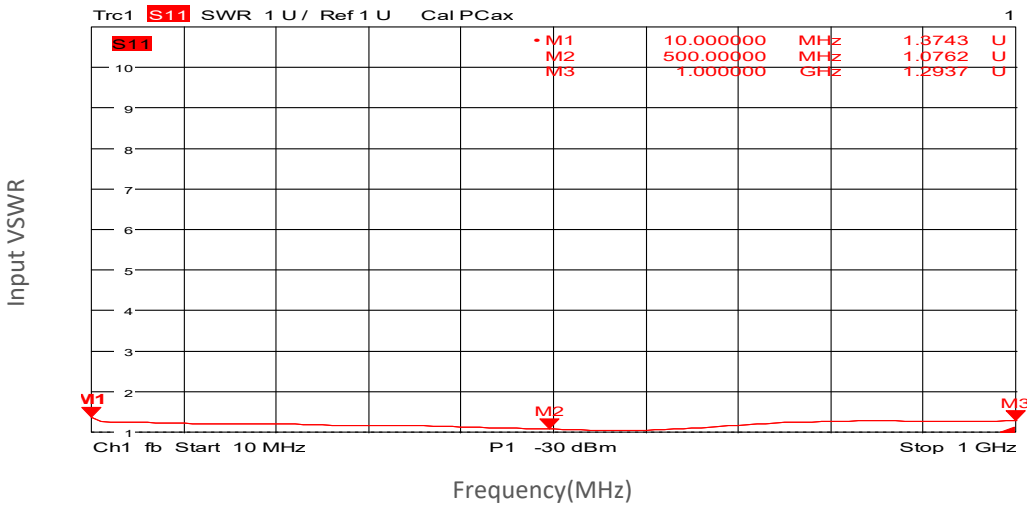

Gain vs Frequency

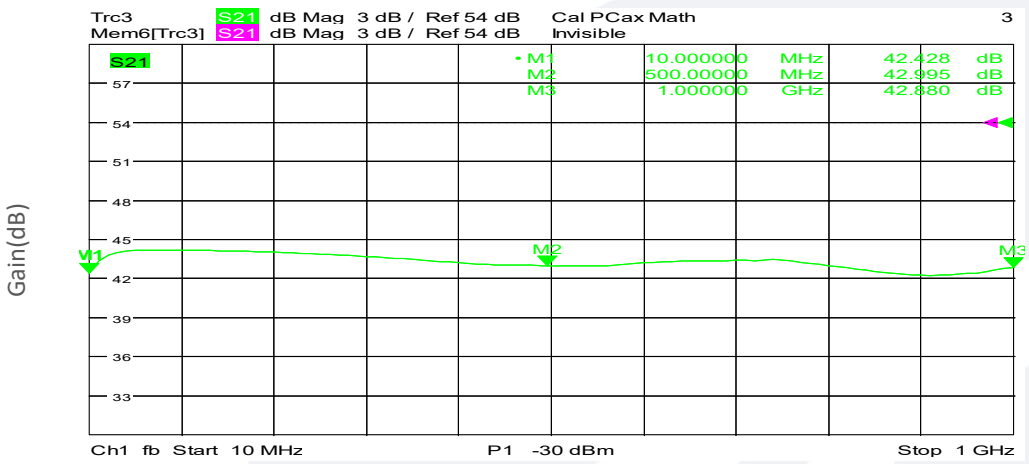

Gain vs Output Power

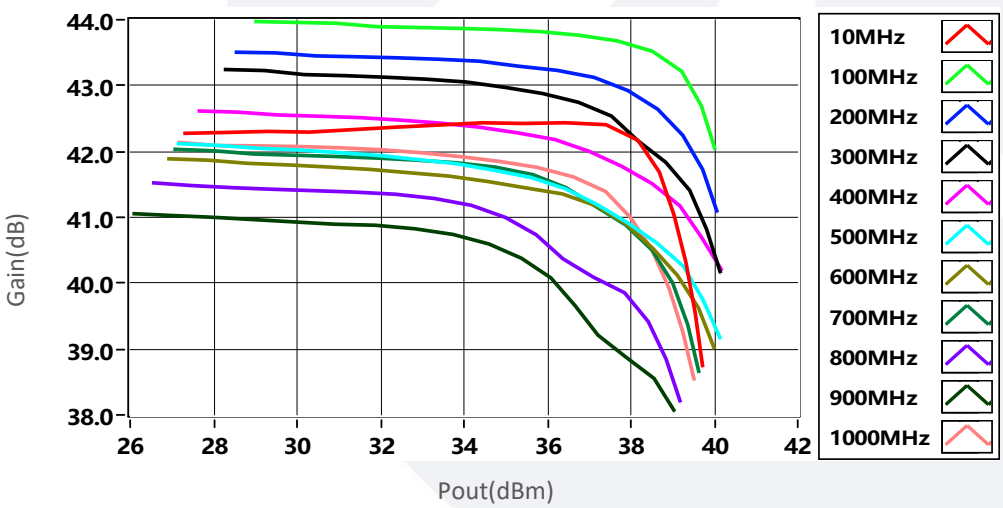

泰莱微波
Talent Microwave
Suzhou Talent Microwave,Inc
+86-0512-62657975
sales@talentmw.com
www.talentmw.com
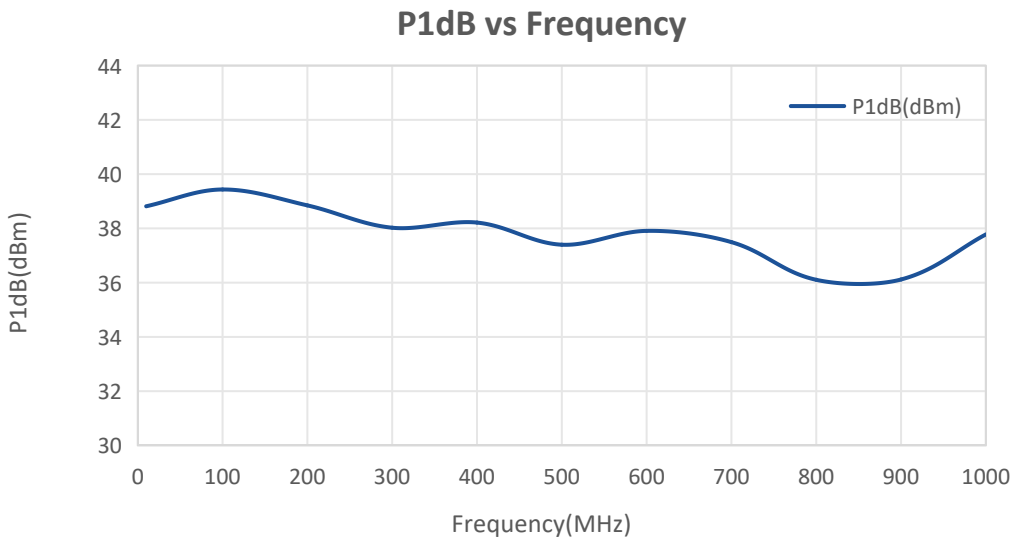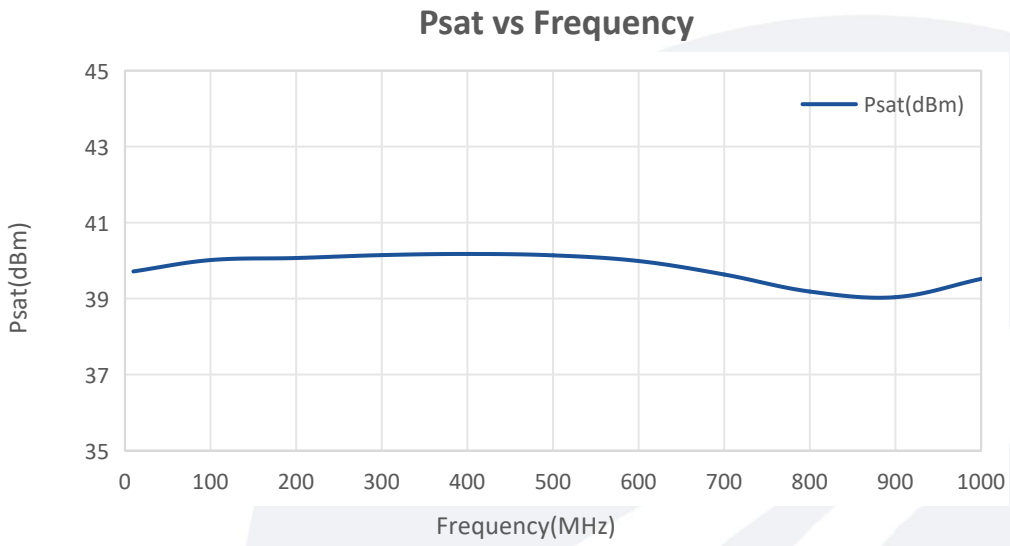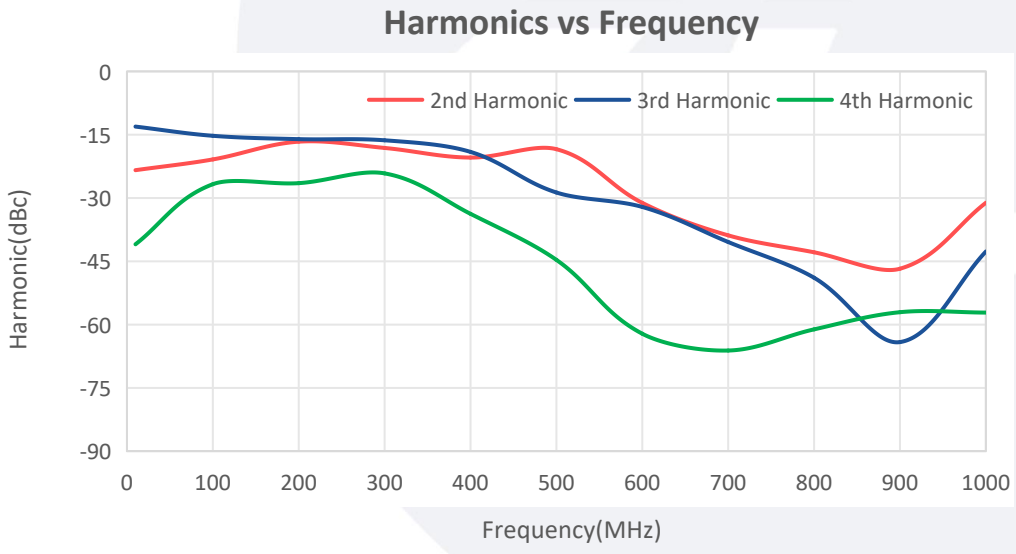
Typical Performance Data: