

Coaxial Highpass Filter

2-18 GHz/2.92mm

Model: TLHF-2G18G-K-A

TLHF-2G18G-K-A is a coaxial highpass filter with a passband frequency from 2 to 18 GHz and a center frequency is 10 GHz. The nominal insertion loss of the filter is 2.4 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 2 to 18 GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	2		18	KHz
Passband Insertion Loss			2.4	dB
Rejection	20@1.4GHz 40@1.25GHz			dB
Return Loss		15		dB
Power Handling			1	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:


Description	Parameter	Units
Operating Temerature	-55 To +125	°C
Storage Temerature	-65 to +150	°C
Connectors	2.92mm	
Weight	/	g

Outline Drawing:


Unit:mm

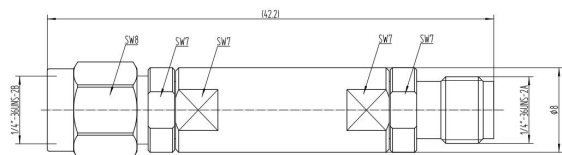

TLHF-2G18G-K-A

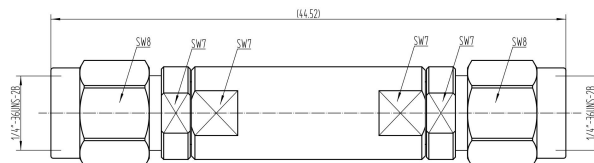

TLHF-2G18G-MM-A

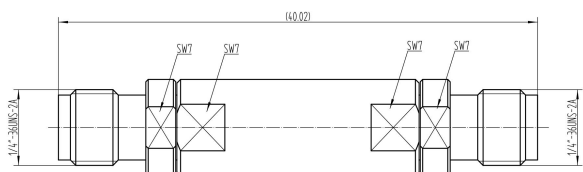

TLHF-2G18G-FF-A



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLHF-2G18G-K-A	Coaxial Highpass Filter, Passband frequency range: 2-18GHz, Passband Insertion Loss: 2.4dB, 2.92mm Male/2.92mm Female Coaxial Fixed Termination.	Rev.1.1
TLHF-2G18G-MM-A	Coaxial Highpass Filter, Passband frequency range: 2-18GHz, Passband Insertion Loss: 2.4dB, 2.92mm Male Coaxial Fixed Termination.	Rev.1.1
TLHF-2G18G-FF-A	Coaxial Highpass Filter, Passband frequency range: 2-18GHz, Passband Insertion Loss: 2.4dB, 2.92mm Female Coaxial Fixed Termination.	Rev.1.1