

Waveguide to Coax Adapter, Right Angle

WR-15/1.85mm Female/ 49.8-75.8GHz

Model: TL-15WCA1.85R-T1

Features:

- Operating Frequency 49.8 to 75.8 GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Characteristics:



Parameter	Min	Typ	Max	Units
Frequency Range	49.8		75.8	GHz
VSWR			1.7	:1
Insertion Loss			1	dB

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Material	Copper	
Finish	Gold Plated	
Coax Connector	1.85mm Female	
Waveguide	WR15/UG-385/U-M	

Outline Drawing:

Unit:mm

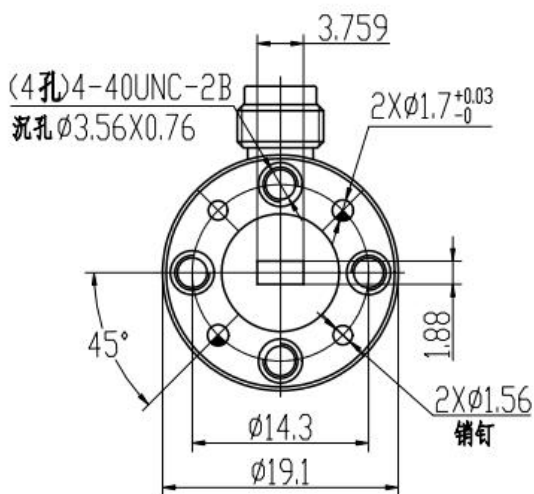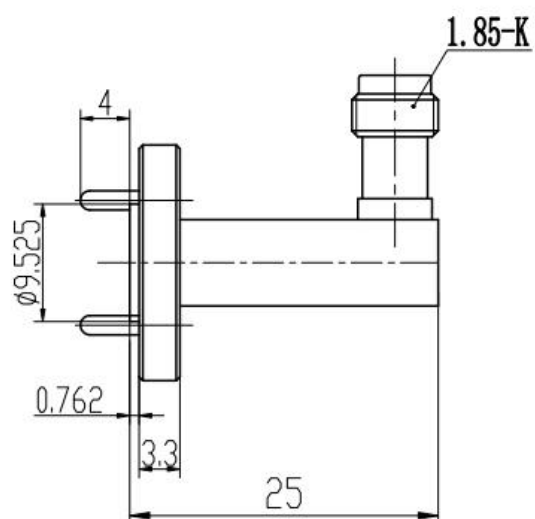

Ordering Information:

Base Number	Description	Revision
TL-15WCA1.85R-T1	Waveguide to Coax Adapter, Right Angle WR15/1.85mm Female,49.8-75.8GHz	Rev.1.1