

Waveguide to Coax Adapter, End Launch WR19/1.85mm Female/40-60GHz

Model: TL-19WCA1.85E-MF

Features:

- Operating Frequency 40 to 60GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	40		60	GHz
驻波 VSWR			1.6	:1
插损 Insertion Loss		1		dB

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
材质 Material	Copper	
表面处理 Finish	Gold Plated	
同轴接口 Coax Connector	1.85mm Female	
波导 Waveguide	WR19/UG-383/U-M	

外形图 Outline Drawing:

Unit:mm

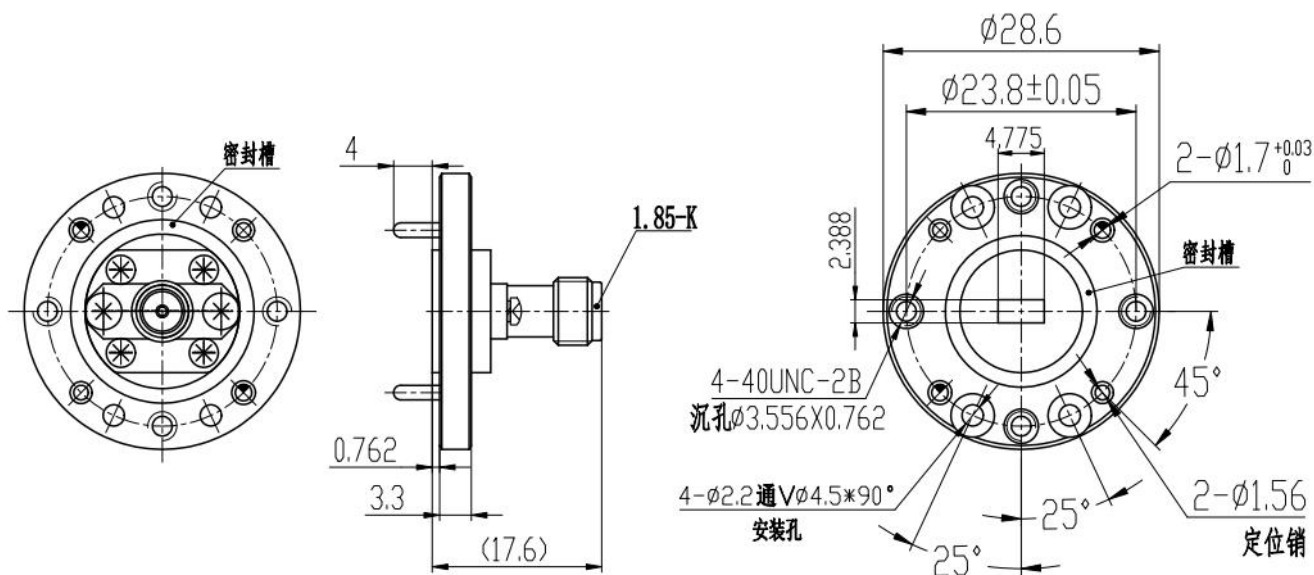

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Desciption	版本号 Revision
TL-19WCA1.85E-MF	Waveguide to Coax Adapter, End Launch WR19/1.85mm Female,40-60GHz	Rev.1.1