

Waveguide to Coax Adapter, Right Angle

WR-19/1.85mm Female/ 39.2-59.6GHz

Model: TL-19WCA1.85R-T1

Features:

- Operating Frequency 39.2 to 59.6 GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	39.2		59.6	GHz
VSWR			1.55	:1
Insertion Loss			1	dB

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Material	Copper	
Finish	Gold Plated	
Coax Connector	1.85mm Female	
Waveguide	WR19/UG-383/U-M	

Outline Drawing:

Unit:mm

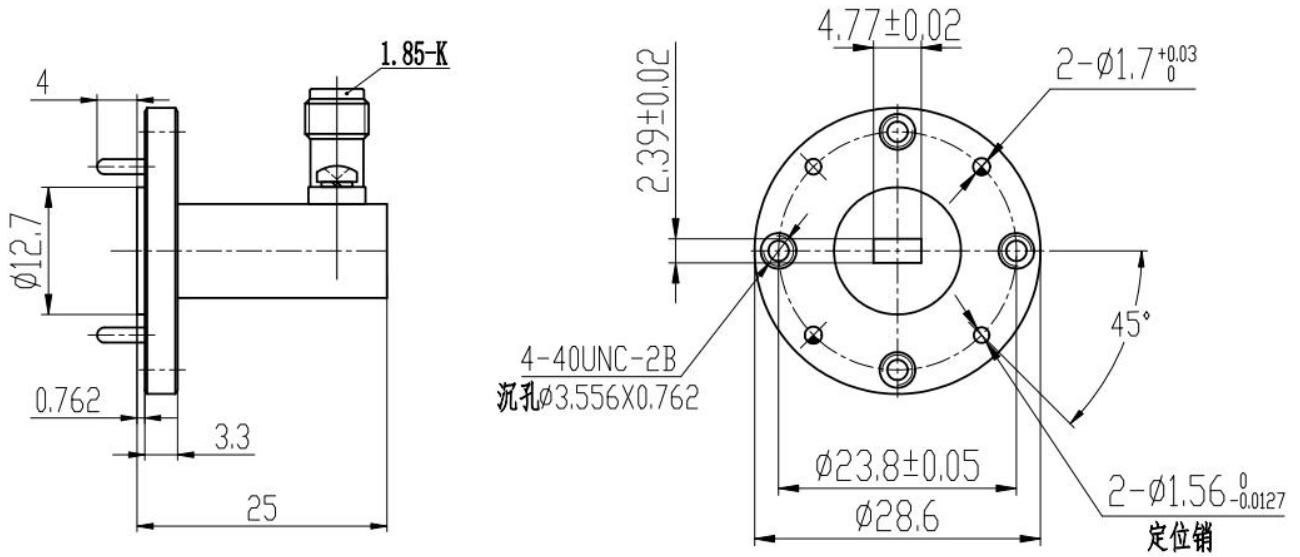

Ordering Information:

Base Number	Description	Revision
TL-19WCA1.85R-T1	Waveguide to Coax Adapter, Right Angle WR19/1.85mm Female, 39.2-59.6GHz	Rev.1.1