

Model:TLLA8G28G-28-25
Low Noise Amplifier
8-28GHz, NF:2.5dB, Gain:27.5dB,P1dB:10dBm
Feature:

- Ultra Wide Band: 8-28GHz
- Gain: 27.5dB Typ
- Noise Figure: 2.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	8-28			GHz
Gain	25	27.5	30	dB
Gain Flatness		±2.5		dB
Noise Figure		2.5		dB
Output P1dB		10		dBm
Output Psat		11		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		12		V DC
DC Supply Current		200		mA
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Solder Pin	
Size	32.1*29.2*11	mm
Weight	/	g


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
Benchtop Amplifier**

Outline Drawing:

Unit: mm(inches)

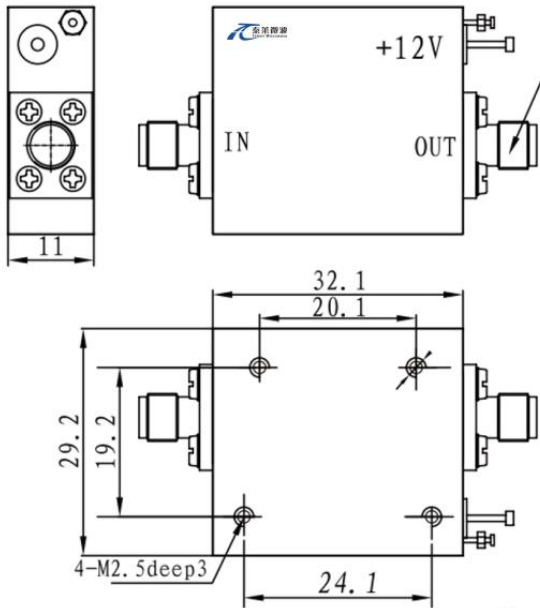

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TLLA8G28G-28-25	Low Noise Amplifier, 8-28GHz, Noise Figure:2.5dB, Gain:27.5 dB,P1dB:10dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA8G28G-28-25-HS	Low Noise Amplifier, 8-28GHz, Noise Figure:2.5dB, Gain:27.5 dB,P1dB:10dBm,+12V DC,With Heatsink	Rev.1.1