

Power Amplifier

0.5-8GHz/35dB Gain/33dBm Psat

Model: TLPA0.5G8G-35-33

TLPA10M2G-30-30 is a power amplifier with a typical small signal gain of 35 dB and a nominal Psat of 33 dBm across the frequency range of 0.5 to 8 GHz. The DC power requirement for the amplifier is +28 VDC/500 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 0.5-8GHz
- Gain: 35dB Typ
- Output Power Psat: 33dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.5		8	GHz
Small Signal Gain	33	35		dB
Gain Flatness		±3		dB
Output Psat	32	33		dBm
Harmonic			-10	dBc
Spurious			-60	dBc
Input VSWR		1.5	2	:1
DC Voltage	+26	+28	+30	V DC
DC Supply Current		500	1200	mA
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	90.2*70*15	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+30 V
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V



Outline Drawing:

Unit:mm

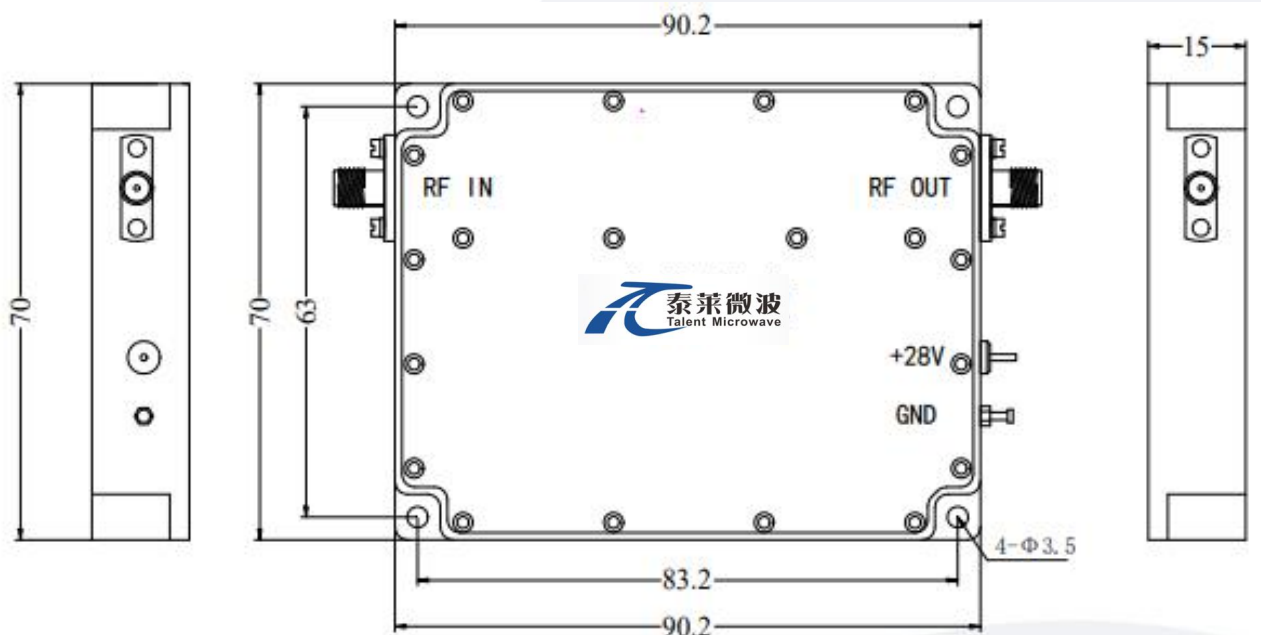

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA0.5G8G-35-33	Power amplifier 0.5-8GHz, Gain:35dB,Psat:33dBm,+28V DC,Without Heatsink	Rev.1.0
TLPA0.5G8G-35-33-HS	Power amplifier 0.5-8GHz, Gain:35dB,Psat:33dBm,+28V DC,With Heatsink	Rev.1.0




Typical Performance Data:

Input VSWR vs Frequency

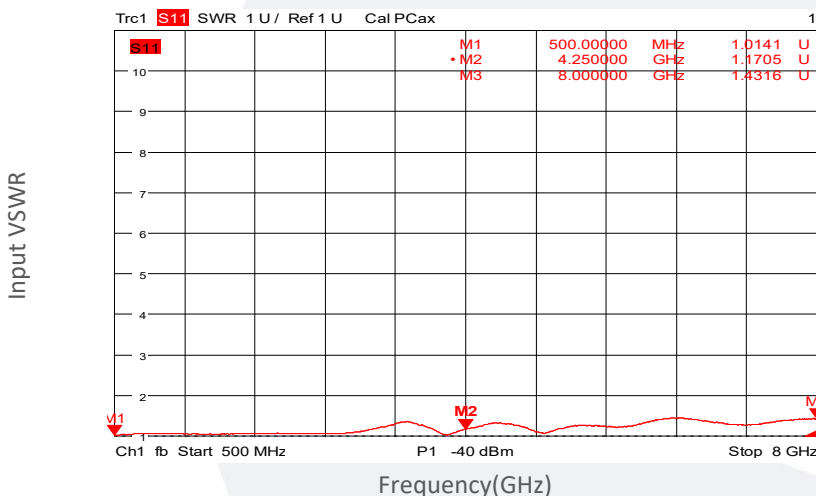




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

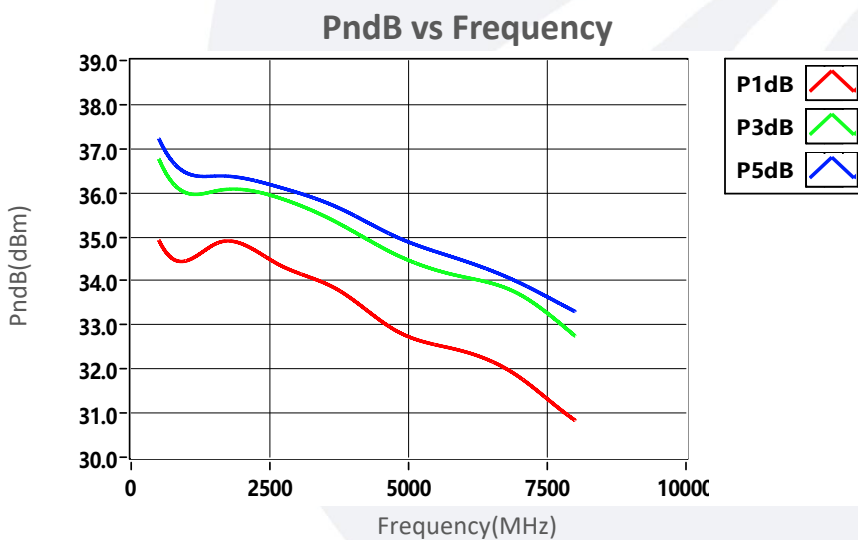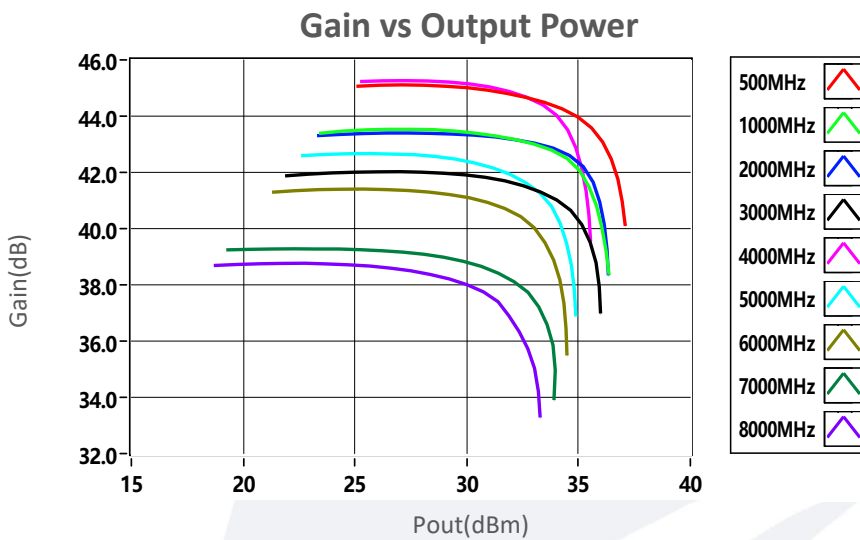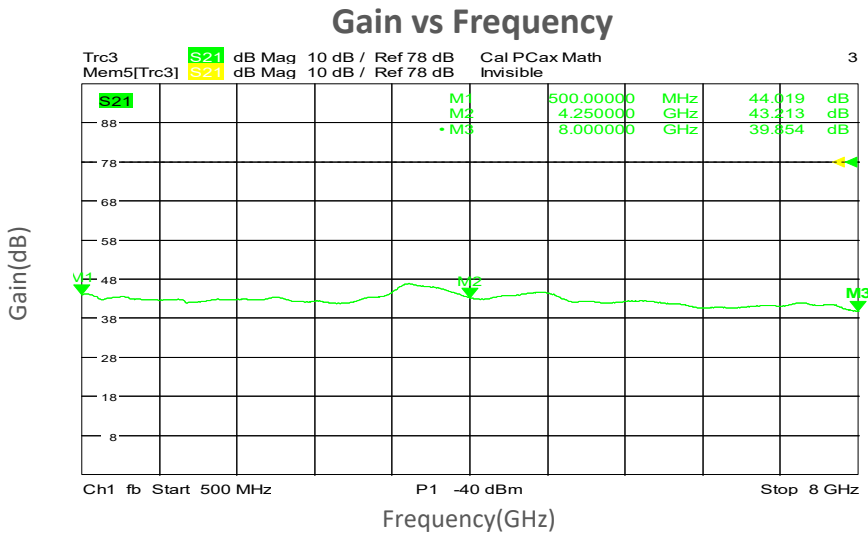

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

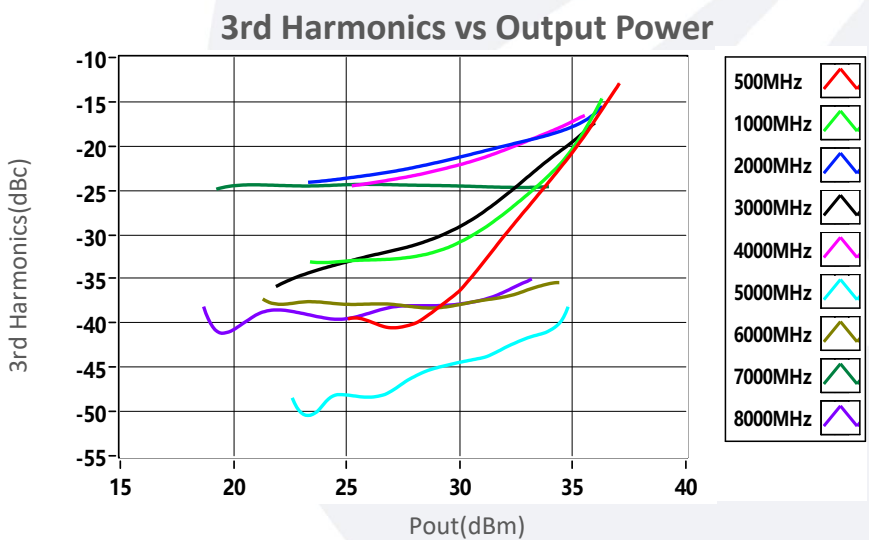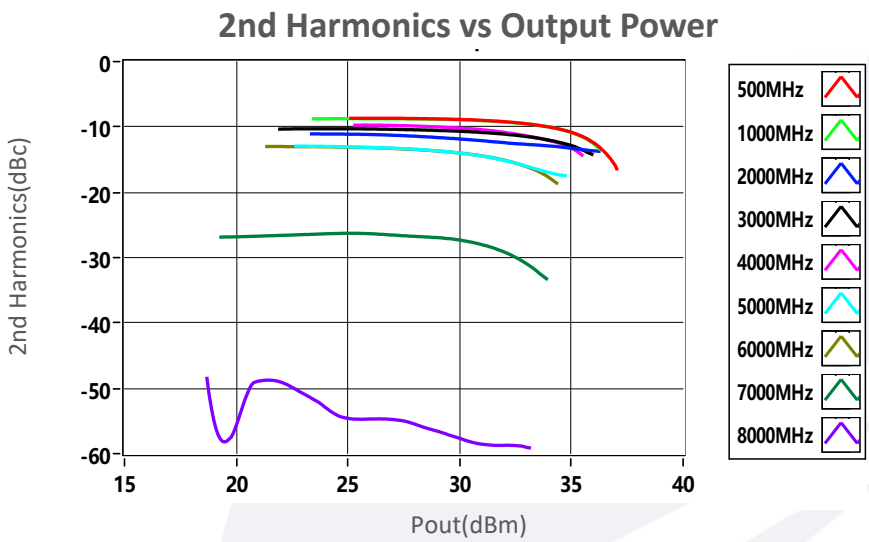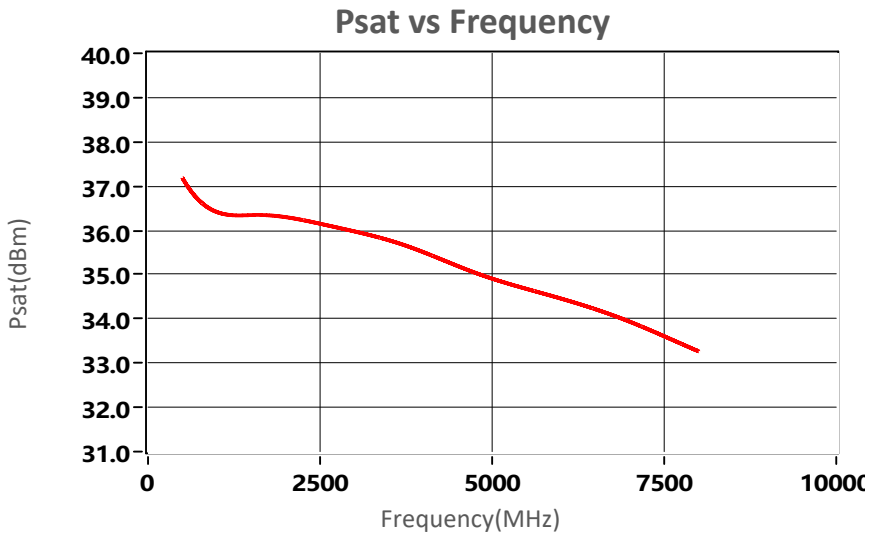

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.