

5-Steps Program Controlled Attenuator

10dB LSB/5 Steps/ DC-67GHz

Model: TLDADC67G-90-5

The TLDADC67G-90-5 is an broadband Program controlled electrical attenuator operating from DC to 67 GHz. The attenuator exhibits 5 dB maximum insertion loss and offers 90 dB nominal attenuation control range in 10 dB steps under a 5 steps digital control. The control speed of the attenuator is 25 ms. The RF input and output ports are female 1.85 mm coax connectors.

Features:

- Frequency range: DC-67GHz
- 5 steps, 10 dB LSB, 90 dB Range
- Low Insertion Loss
- High Attenuator Accuracy

Applications:

- Radar Systems
- Communication Systems
- Testing Equipment

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	DC-67			GHz
插损 Insertion Loss(@0dB)			5.0	dB
衰减范围 Attenuation Range	90			dB
衰减精度 Attenuation Accuracy	± 1.5 dB (10dB); ± 2.5 dB (20dB)			dB
控制级数 Control Step	5			Step
衰减步进 Attenuation Step	10			dB
重复性 Repeatability		0.05		dB
切换时间 Switching Speed		20	25	ms
驻波 Input VSWR		1.5	2.0	:1
最大输入功率 Input Max Power			30(CW)	dBm
寿命 Operating Life (Per Switch)	1000000			cycles
直流电压 DC Voltage	20	24	28	V DC
直流电流 DC Supply Current	126(every step)			mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


描述 Description	参数 Parameter	单位 Units
输入/输出接口 Input /Output Connector	1.85mm Female/1.85mm Female	
控制连接器 Control Connector	517.076.003.014	
尺寸 Size	128.9*45*22	mm
重量 Weight	≤350	g

绝对最大值 Absolute Maximum Ratings :

描述 Description	参数 Parameter	单位 Units
射频输入功率 RF Input Power	+30	dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	

外形图 Outline Drawing:

Unit:mm

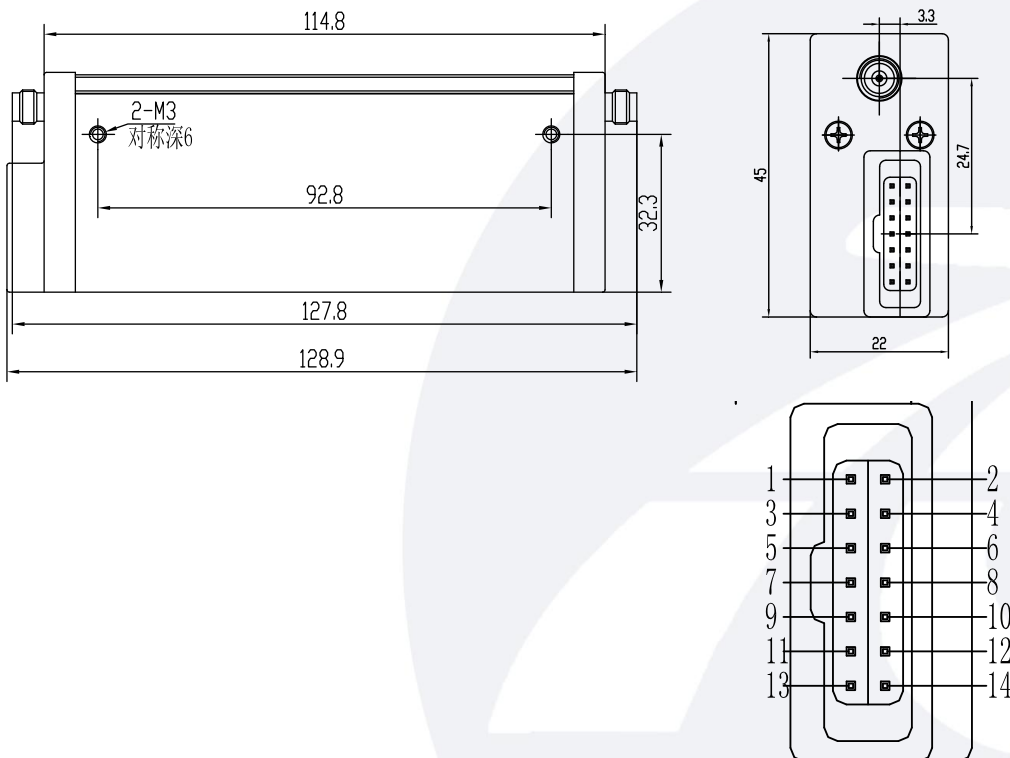

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

加电接口 Supply Conector(517.076.003.014):

引脚Pin#	功能Function
1,2	NC
3	Step2 20dB attenuation
4	+24V
5	Step4 10dB attenuation
6	Step3 20dB attenuation
7	Step3 Straight-through
8	Step4 Straight-through
9	GND
10	Step2 Straight-through
11	Step1 Straight-through
12	Step1 20dB attenuation
13	Step5 Straight-through
14	Step5 20dB attenuation
15	+20~+28V DC

Note:At same step,if the voltage of this pin drops from TTL high level to low level (0V to +1.0Vdc) and the low level lasts for more than 20ms, while other pins (except pins 1、2、4、9) remain at TTL high level (+4.2V to +5Vdc), their respective functions will be implemented.

真值表 Truth Table					
Step1	Step2	Step3	Step4	Step5	衰减 Attenuation
○	○	○	○	○	0dB
○	○	○	×	○	10dB
×	○	○	○	○	20dB
×	○	○	×	○	30dB
×	×	○	○	○	40dB
×	×	○	×	○	50dB
×	×	×	○	○	60dB
×	×	×	×	○	70dB
×	×	×	○	×	80dB
×	×	×	×	×	90dB

Note:“○” represents signal transmission through a straight-through patch, “X” represents signal transmission through an attenuating patch.

For example, to achieve a 40dB attenuation, the connector should be powered as follows:

Pin 3: TTL high level changes to low level and the low level lasts for more than 20ms

Pin 4: +24V DC

Pin 5: TTL high level

Pin 6: TTL high level

Pin 7: TTL high level changes to low level and the low level lasts for more than 20ms

Pin 8: TTL high level changes to low level and the low level lasts for more than 20ms

Pin 9: GND

Pin 10: TTL high level

Pin 11: TTL high level

Pin 12: TTL high level changes to low level and the low level lasts for more than 20ms

Pin 13: TTL high level

Pin 14: TTL high level

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-55		+75	℃
存储温度 Non-operating Temperature	-55		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	5g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	10G for 6msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLDADC67G-90-5	5-Steps Program Controlled Attenuator, DC-67GHz,90 dB, 10dB Step Size,1.85mm Female	Rev.1.1