

V-band,Active Tx/Rx Converter

WR-15/50-75GHz/-8dB Conversion Loss

Model: TLAMCM-050075-10-15

TLAMCM-050075-10-15 is an up and down fundamental mixer integrated with x6 active frequency multiplier chain. The converter has an input LO frequency of 8.33 to 12.5 GHz with a typical input power of 0 dBm. RF frequency can range from 50 to 75 GHz and IF port can range from DC to 10GHz with 2.92mm connector. The DC power requirement for the multiplier is +12 V DC.

Features:

- RF Frequency: 50-75GHz
- LO Frequency: 8.33-12.5GHz
- IF Frequency: DC-10GHz
- Low Conversion Loss

Applications:

- Test Equipment
- Radar System
- V-band Imaging

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
RF频率 RF Frequency	50		75	GHz
6XLO频率 6XLO Frequency	50		75	GHz
LO频率 LO Frequency	8.33		12.5	GHz
IF频率 IF Frequency	DC		20	GHz
LO驱动功率 LO-Input power	-3	0	3	dBm
LO倍频次数 LO Multiplier factor		6		
变频损耗 Conversion Loss(IF=100MHz)		-8		dB
变频损耗 Conversion Loss(LO=8.5GHz)		-9		dB
直流电压 DC Supply Voltage		12		V DC
直流电流 DC Supply Current		TBD		mA

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
RF 接口 RF Connector	WR-15/UG-385/U	
LO 接口 LO Connector	SMA Female	
IF 接口 IF Connector	2.92mm Female	
尺寸 Size	50*25*23	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
RF输入功率 RF Input Power	TBD
LO输入功率 LO Input Power	TBD
IF输入功率 IF Input Power	TBD
直流电压 DC Supply Voltage	+15 V
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

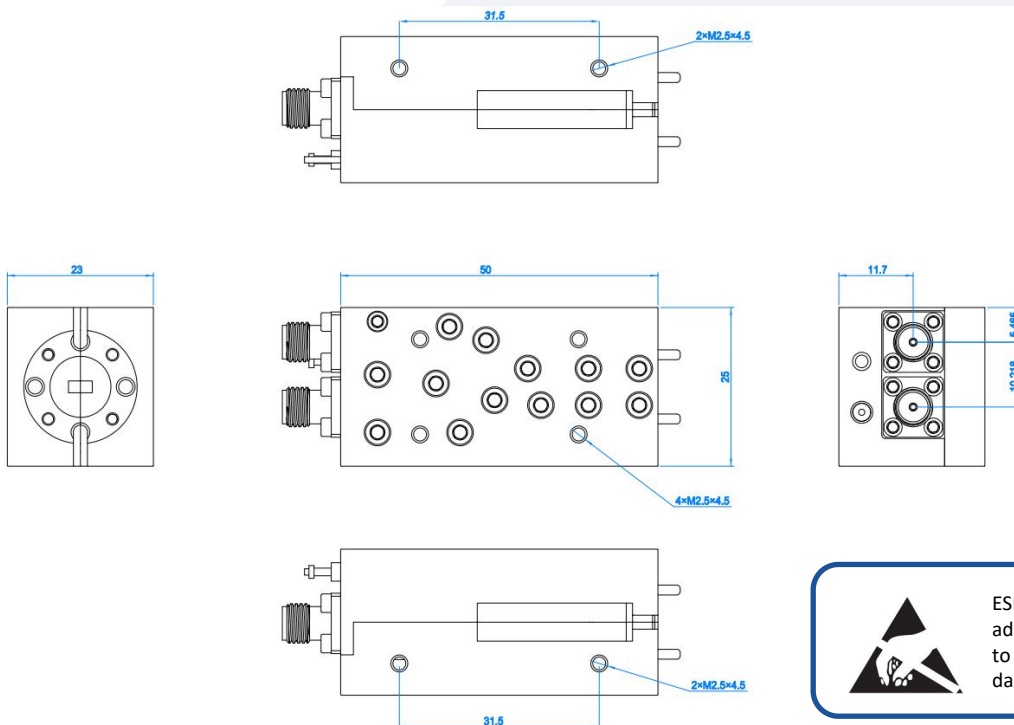

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	0		+50	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLAMCM-050075-10-15	V-band Active Tx/Rx Converter, Conversion Loss: -8dB,WR-15/UG-385/U	Rev.1.0

典型曲线 Typical Performance Data:


Conversion Loss vs RF Frequency

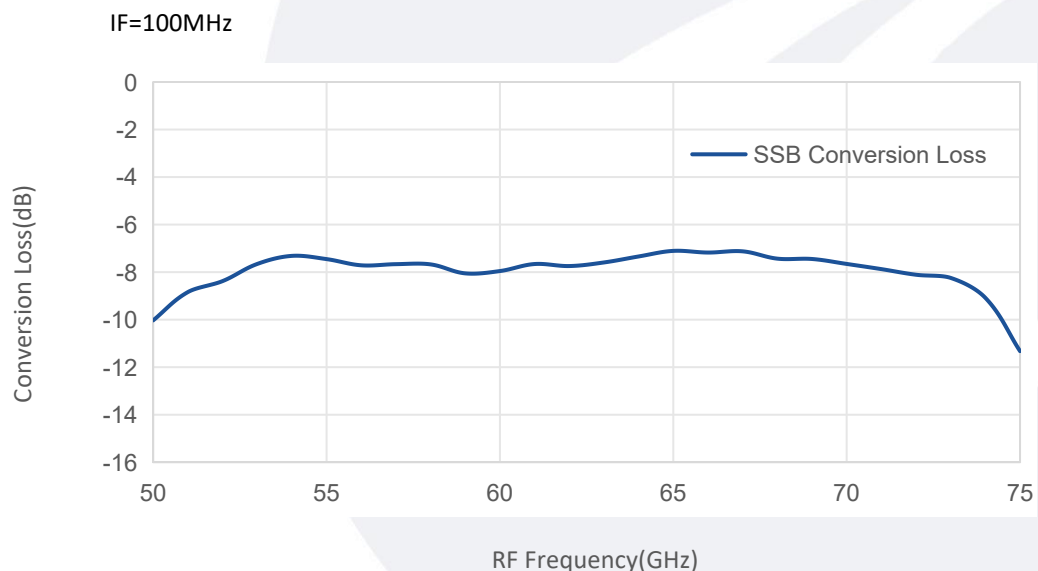

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Conversion Loss vs IF Frequency

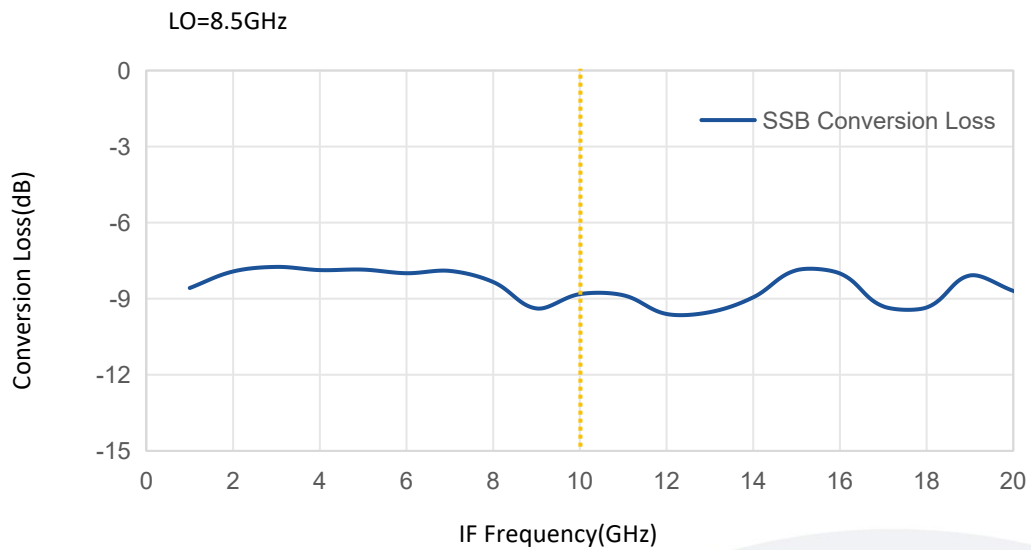

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.