

Coaxial Band-pass Filter

3.4-3.6GHz/ SMA Female

Model: TLBF-3G5-200M-E2

TLBF-3G5-200M-E2 is a coaxial band-pass filter with a passband frequency from 3.4 to 3.6GHz and a rejection frequencies at 2.8GHz and 3.9 GHz. The nominal insertion loss of the filter is 1.0dB and the typical rejection is 20 dB.

Features:

- Passband Frequency Range 3.4 to 3.6GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	3.4		3.6	GHz
Insertion Loss (f_o)			1.0	dB
Pass Band Ripple			0.8	dB
Rejection	>20dB@2800MHz 3900MHz			dB
Power Handling			50	W
Input VSWR			1.6	:1
Output VSWR			1.6	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temperature	-40 to +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm;

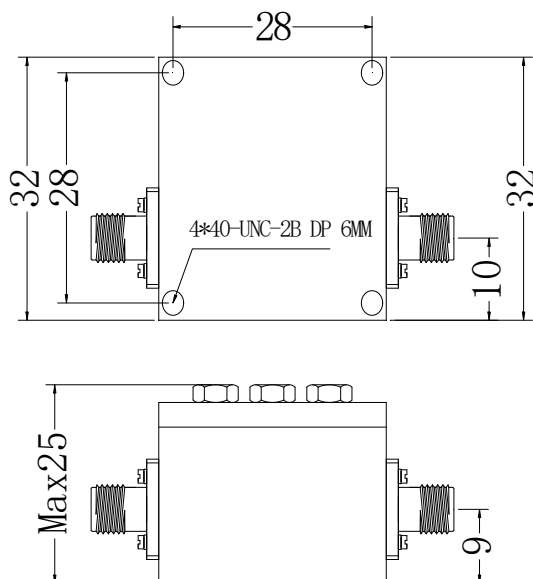

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-3G5-200M-E2	Coaxial Band-pass Filter, Passband frequency range: 3.4 to 3.6GHz , Insertion Loss (fo) :1.0dB, SMA Female	Rev.1.0