

Coaxial Band-pass Filter

3.95-4.55GHz/ SMA Female

Model: TLBF-4G25-600M-E

TLBF-4G25-600M-E is a coaxial band-pass filter with a passband frequency from 3.95 to 4.55GHz and a rejection frequencies from 0 to 3.25GHz and 5.05 GHz. The nominal insertion loss of the filter is 1.2 dB and the typical rejection is 70 dB.

Features:

- Passband Frequency Range 3.95 to 4.55GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	3.95	4.25	4.55	GHz
Passband Insertion Loss			1.2	dB
Pass Band Ripple	0.4			dB
Group Delay Flatness	1.3			NS
Rejection	>70dB@DC-3.25Ghz 5.05Ghz			dB
Power Handling			15	W
Input VSWR			1.3	:1
Output VSWR			1.3	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temperature	-40 to +70	°C
Connectors	SMA Female	

Outline Drawing:
Unit:mm;

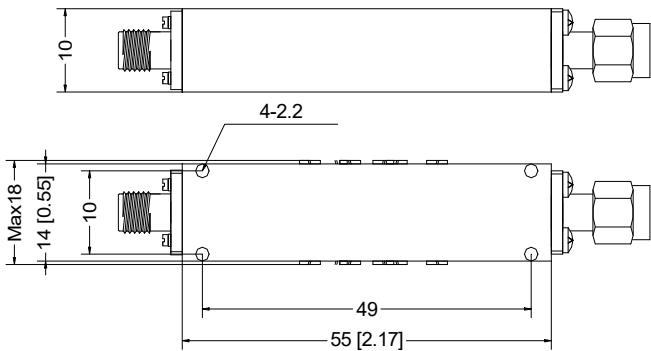




ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-4G25-600M-E	Coaxial Band-pass Filter,Passband frequency range:3.95 to 4.55GHz ,Passband Insertion Loss:1.2dB, SMA Female	Rev.1.0

Typical Performance Data:

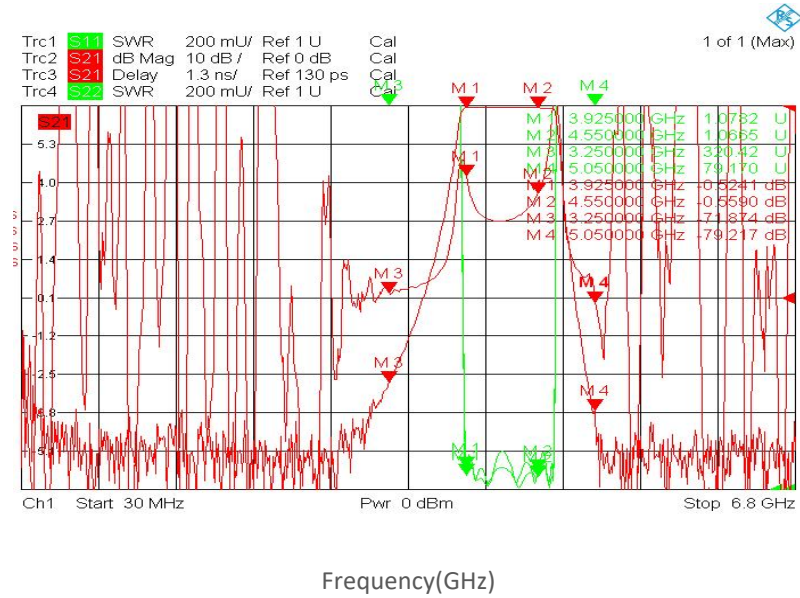

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.