

Part No.: RS4W04180-S

Power Divider /Combiner 4 Way SMA 50Ω 0.4 to 18GHz

Electrical:

Frequency Range: 0.4-18 GHz

Insertion Loss: ≤2.6dB

VSWR: ≤2.4/1.6: 1

Isolation: ≥11dB(400M-500M)

≥15dB(600M-18000M)

Amplitude Balance: ≤±0.9dB

Phase Balance: ≤±12°

Power Handling: 5 Watt

Impedance: 50 OHMS

Mechanical :


Temperature Range: -55° C - +85° C





Connectors: SMA-Female

Relative Humidity: 0 ~ 90%

Outline Drawing:

Unit: mm

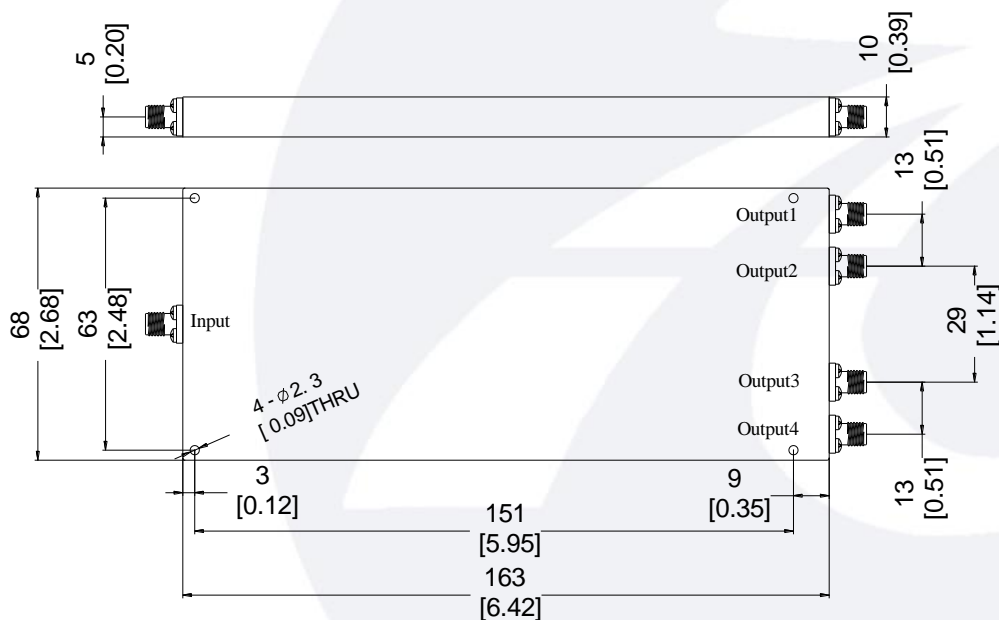

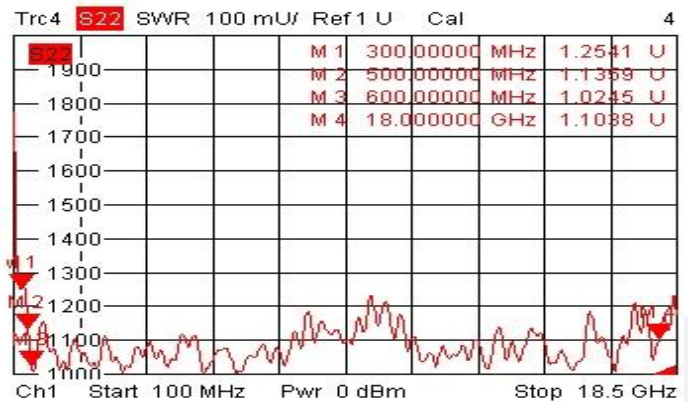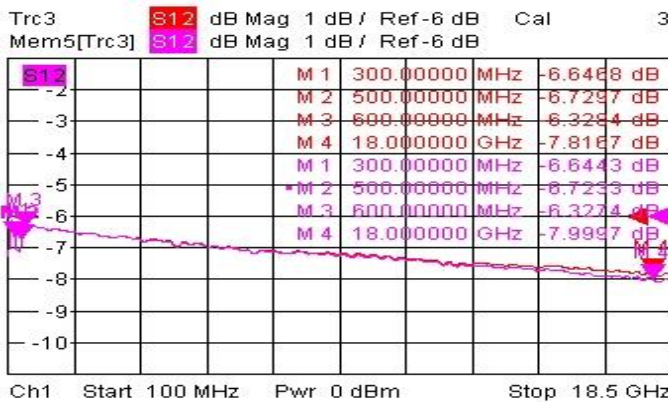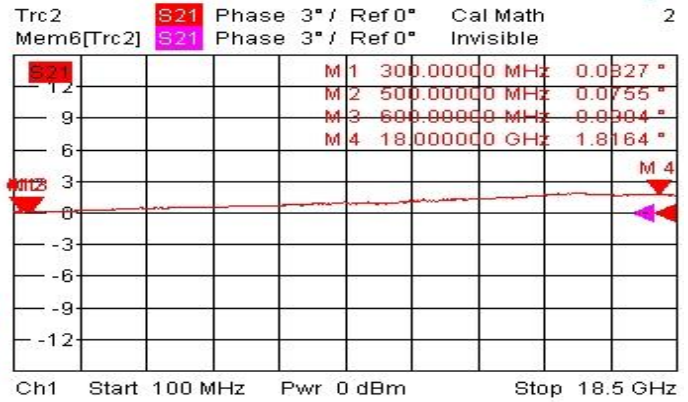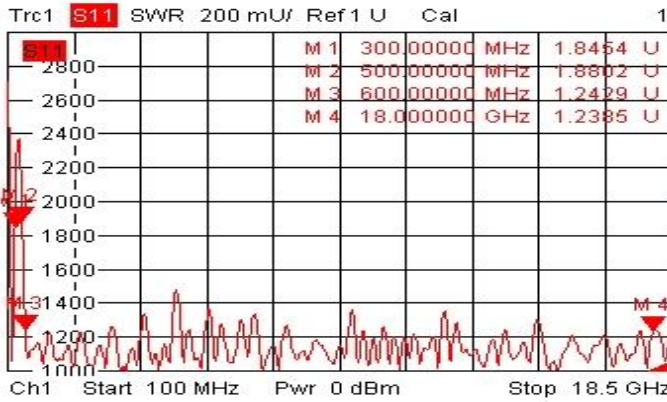

Trc2 **S21** dB Mag 2 dB / Ref -18 dB Cal 2 of 4 (Max)
Mem6[Trc2] **S21** dB Mag 2 dB / Ref -18 dB Invisible

