

Coaxial Band-pass Filter

9.18-9.58GHz/ SMA Female

Model: TLBF-9G38-400M-E

TLBF-9G38-400M-E is a coaxial band-pass filter with a passband frequency from 9.18 to 9.58GHz and a rejection frequencies at 7.88GHz and 10.88GHz. The nominal insertion loss of the filter is 2.0 dB and the typical rejection is 60 dB.

Features:

- Passband Frequency Range 9.18 to 9.58GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	9.18		9.58	GHz
通带插损 Passband Insertion Loss			2.0	dB
带内纹波 Pass Band Ripple			1.8	dB
带外抑制 Rejection	≥60dB@10.88GHz @7.88GHz			dB
耐受功率 Power Handling			50	W
输入驻波 Input VSWR			1.8	:1
输出驻波 Output VSWR			1.8	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	℃
存储温度 Storage Temerature	-40 to +70	℃
接口 Connectors	SMA Female	

外形图 Outline Drawing: Unit:mm;

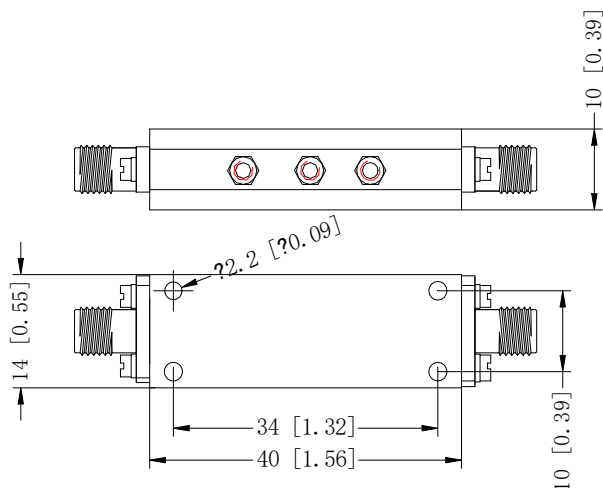


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-9G38-400M-E	Coaxial Band-pass Filter, Passband frequency range: 9.18 to 9.58 GHz, Passband Insertion Loss: 2.0 dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

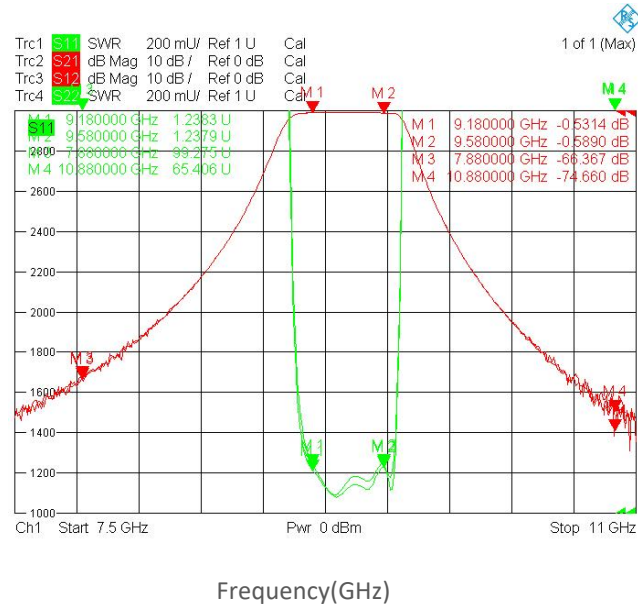

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.