

Part No : TT100-6-SMA

DC-6GHz,100W,SMA Female/Male Coaxial Fixed Terminations

Electrical Specifications:


| | |
|--------------------|---------------------------|
| Frequency Range: | DC-6 GHz |
| VSWR: | DC-3GHz,≤1.15 @Max |
| | DC-4GHz,≤1.20 @Max |
| | DC-6GHz,≤1.30 @Max |
| RF Power Handling: | ≤100Watts Average at 25°C |
| Impedance: | 50 Ohms |

Mechanical Specifications:

| | |
|------------------------|--------------------------------------|
| Operation Temperature: | -55°C - +100°C |
| Storage Temperature: | -55°C - +100°C |
| Body Material: | Black, Finned Aluminum |
| Center Conductor: | Gold-plated, Phosphor bronze |
| Connectors: | SMA Female/Male, Nickel plated Brass |
| Weight: | 260g |

Outline Drawing:

Unit: mm

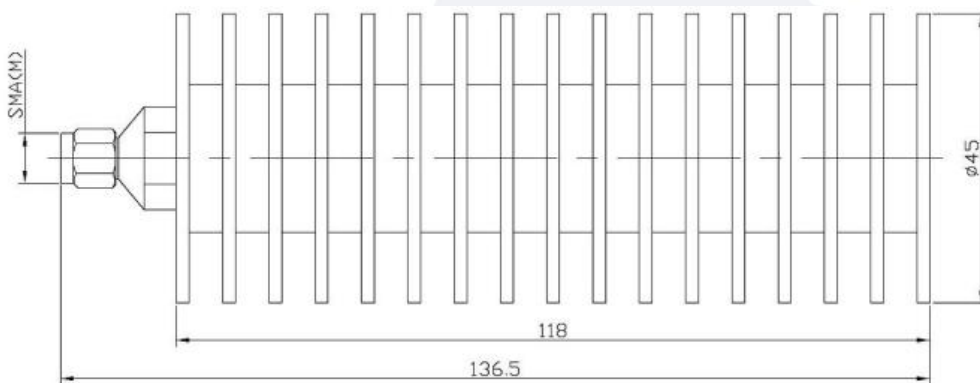

Ordering Information:

| Part Number | Description |
|-------------|--------------------------------------------------------|
| TT100-6-SMA | DC-6GHz,100W,SMA Female/Male Coaxial Fixed Termination |