

## Coaxial Band-pass Filter

26-40GHz/ 2.92 Female

Model: TLBF-26G-40G-A

TLBF-26G-40G-A is a coaxial band-pass filter with a passband frequency from 26 to 40GHz and a rejection frequencies @23.5 and 42.5 GHz. The nominal insertion loss of the filter is 2.0 dB and the typical rejection is 50 dB.

### Features:

- Passband Frequency Range 26 to 40 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

### Applications:

- Instrumentations
- Radar Systems
- System Integrations


## 电气特性 Electrical Characteristics:

| 参数 Parameter                    | Min                             | Typ | Max | 单位 Units |
|---------------------------------|---------------------------------|-----|-----|----------|
| 通带频率范围 Passband Frequency range | 26                              |     | 40  | GHz      |
| 通带插损 Passband Insertion Loss    |                                 |     | 2.0 | dB       |
| 带内纹波 Pass Band Ripple           |                                 |     | 1.8 | dB       |
| 带外抑制 Rejection                  | $\geq 50@f_c \pm 2.5\text{GHz}$ |     |     | dB       |
| 耐受功率 Power Handling             |                                 |     | 15  | W        |
| 输入驻波 Input VSWR                 |                                 |     | 1.8 | :1       |
| 输出驻波 Output VSWR                |                                 |     | 1.8 | :1       |
| 阻抗 Impedance                    | 50                              |     |     | Ohms     |

## 环境和机械特性 Envirionmental And Physical Characteristics:

| 类型 Description             | 参数 Parameter | 单位 Units |
|----------------------------|--------------|----------|
| 操作温度 Operating Temperature | -40 To +70   | °C       |
| 存储温度 Storage Temperature   | -40 to +70   | °C       |
| 接口 Connectors              | 2.92 Female  |          |

外形图 Outline Drawing: Unit:mm;

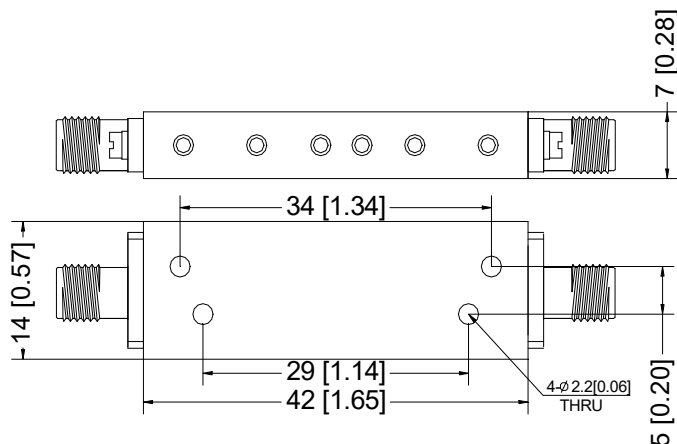


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description                                                                                               | 版本号 Revision |
|------------------|--------------------------------------------------------------------------------------------------------------|--------------|
| TLBF-26G-40G-A   | Coaxial Band-pass Filter, Passband frequency range: 26 to 40GHz, Passband Insertion Loss: 2.0dB, 2.92 Female | Rev.1.0      |

## 典型曲线 Typical Performance Data:

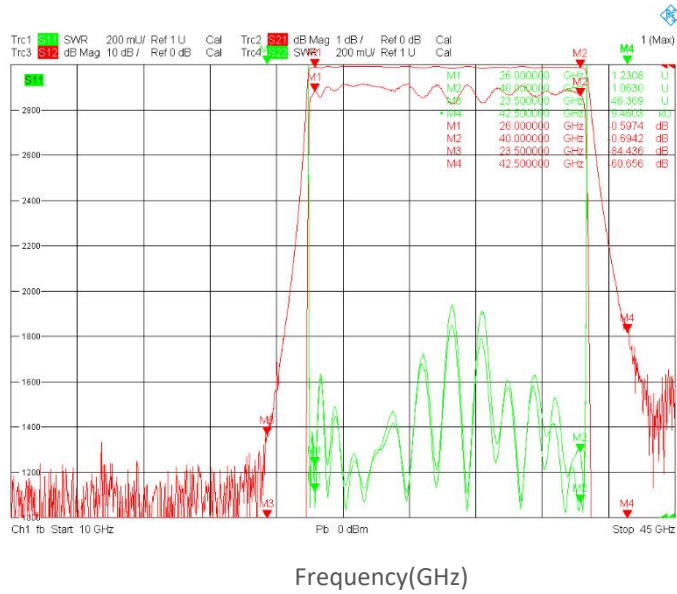

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.