

Coaxial High-pass Filter

600-6000 MHz/SMA Female

Model: TLHF-600M-6000M-L

TLHF-600M-6000M-L is a coaxial High-pass filter with a passband frequency from 600 to 6000 MHz and a rejection frequency from DC to 400 MHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 600 to 6000MHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
带通频率范围 Passband Frequency range	600		6000	MHz
通带插损 Passband Insertion Loss			1.0	dB
带内纹波 Pass Band Ripple			0.9	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@DC-400MHz	40			dB
耐受功率 Power Handling			2	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	10*12*40.4	mm

外形图 Outline Drawing:

Unit:mm

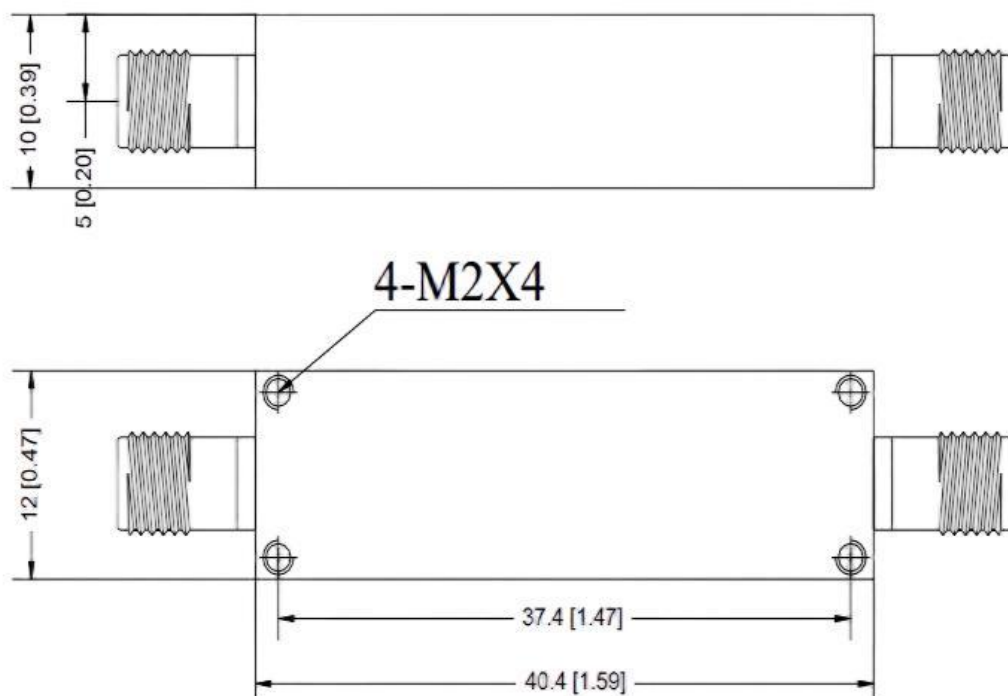


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLHF-600M-6000M-L	Coaxial High-pass Filter, Passband frequency range: 600-6000MHz, Passband Insertion Loss: 1.0dB, SMA Female Coaxial Fixed Termination	Rev.1.1

典型曲线 Typical Performance Data:

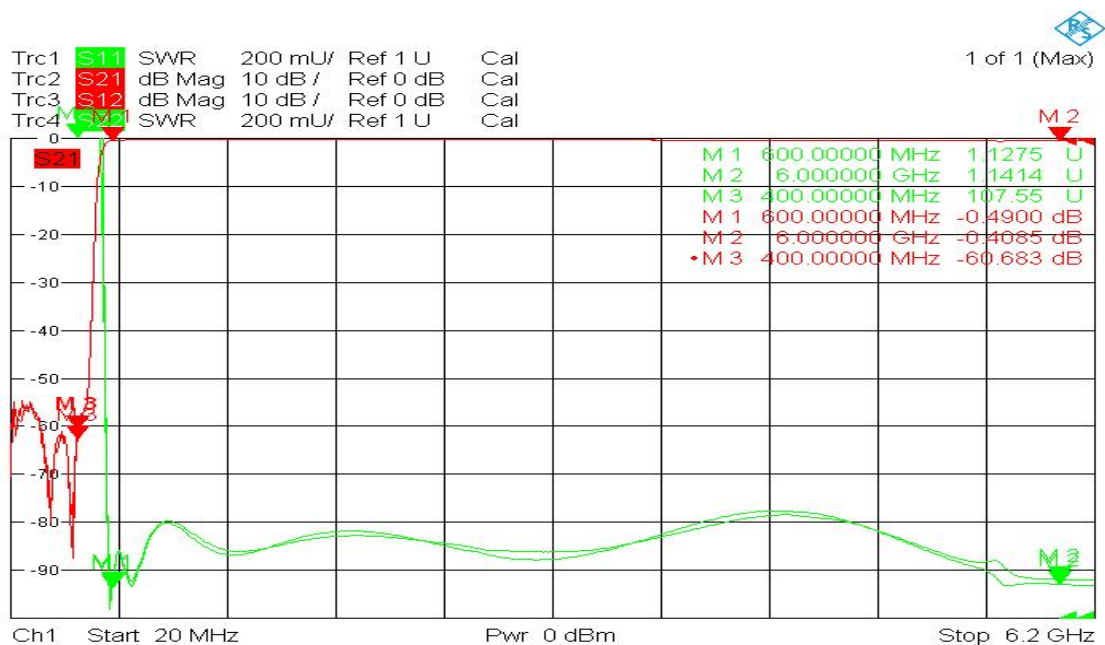

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.