

Coaxial Band-pass Filter

10-18 GHz/SMA Female

Model: TLBF-10G-18G-X2

TLBF-10G-18G-X2 is a coaxial band-pass filter with a passband frequency from 10 to 18 GHz and a rejection frequencies from DC-8.5GHz and 20.7-24 GHz. The maximum insertion loss of the filter is 1.0 dB and the typical rejection is 60 dB.

Features:

- Passband Frequency Range 10 to 18 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	10		18	GHz
带宽 Band Width			8	GHz
通带插损 Passband Insertion Loss			1.5	dB
带内波动 Pass Band Ripple			1.0	dB
带外抑制 Rejection	>50dB,60db typ@dc-8.5Ghz 20.7-24Ghz			dB
耐受功率 Power Handling			15	W
驻波 VSWR			1.8	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	

外形图 Outline Drawing:

Unit:mm

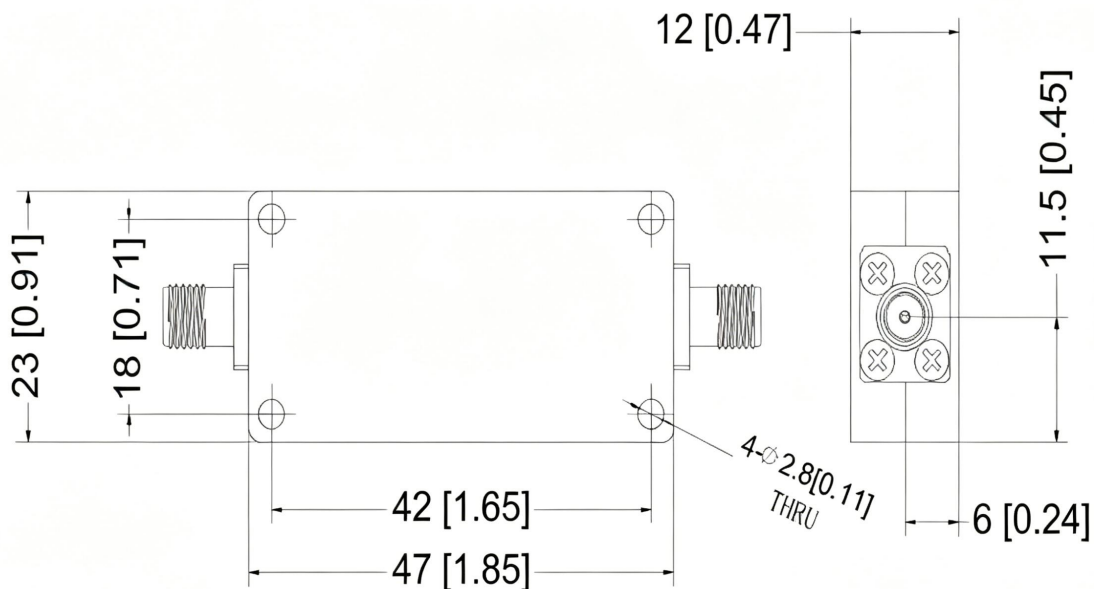


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-10G-18G-X2	Coaxial Band-pass Filter, Passband frequency range: 10-18GHz, Passband Insertion Loss: 1.5dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

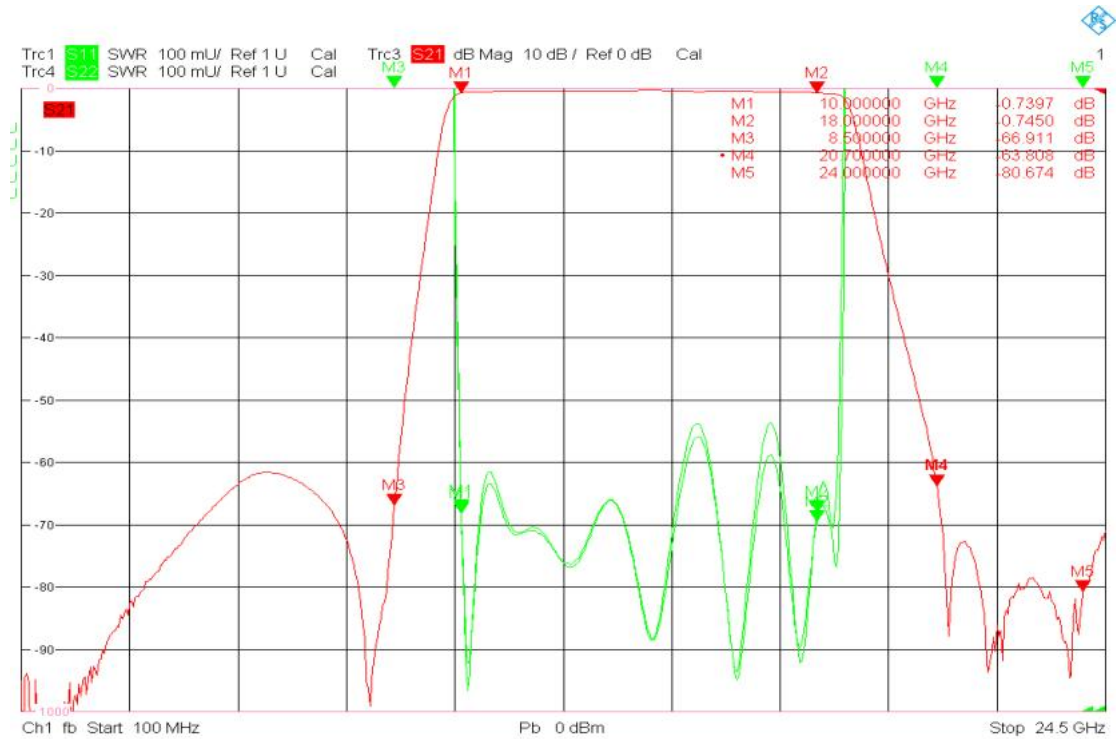

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.