

Coaxial Band-stop Filter

Stopband: 5.725-5.925GHz

Model: TLRF-5G725-5G925-S

TLRF-5G725-5G925-S is a coaxial band-stop filter with a stop band frequency from 5.725 to 5.925 GHz and a pass band frequency from DC to 5.55GHz and 6.05 to 12GHz. The maximum insertion loss of the filter is 2 dB and the minimum rejection is 40 dB.

Features:

- Stopband Frequency Range 5.725 to 5.925GHz
- Low Insertion Loss
- Lower Cost
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
阻带频率范围 Stopband Frequency rang	5.725		5.925	GHz
通带频率范围 Passband Frequency range	DC-5.55 & 6.05-12			GHz
阻带抑制 Stopband Rejection	40			dB
通带插损 Passband Insertion Loss			2	dB
通带驻波 Passband VSWR			1.7	:1
耐功率 Power Handling		10		W
阻抗 Impedance		50		Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	0 to +40	°C
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
尺寸 Size	150*27.8*20	mm

外形图 Outline Drawing:

Unit:mm

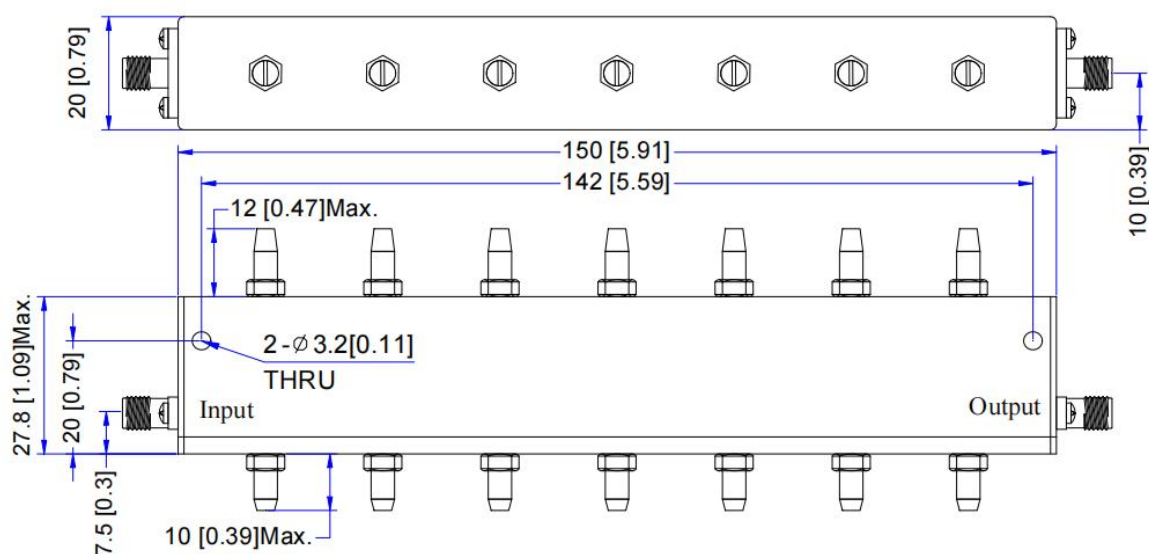


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLRF-5G725-5G925-S	Coaxial Band-stop Filter, Stopband: 5.725-5.925GHz, Passband: DC-5.55GHz & 6.05-12GHz, Stopband rejection: 40dB Min	Rev.1.0

典型曲线 Typical Performance Data:

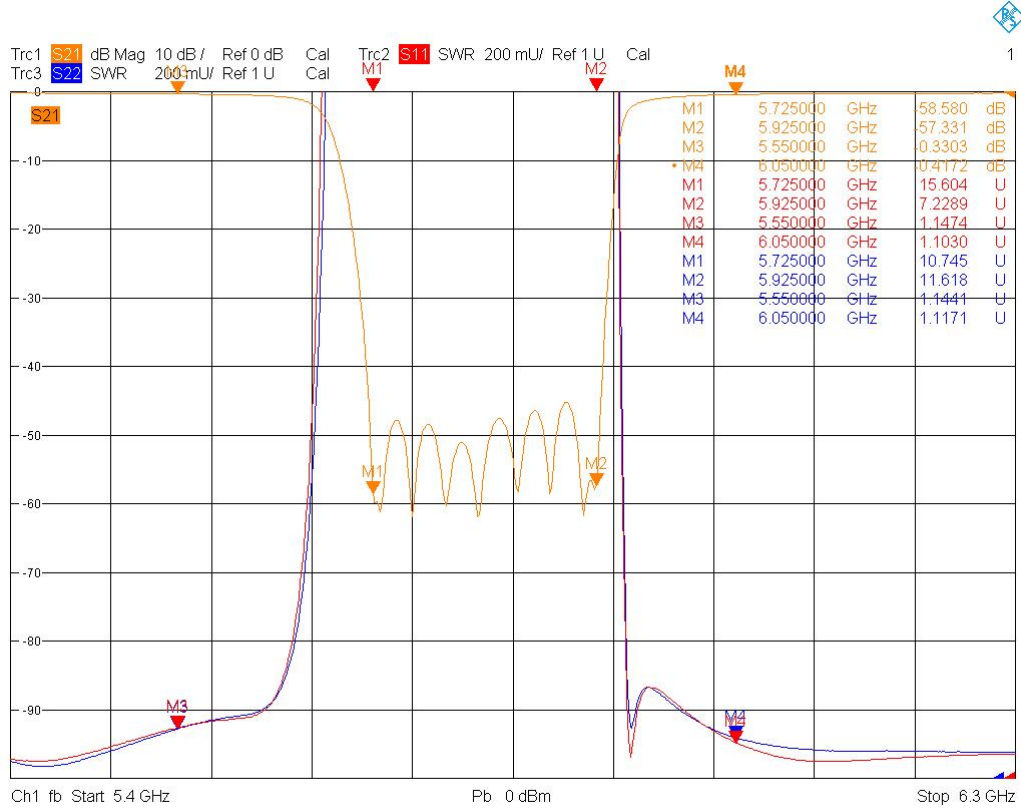

4/9/2025, 9:56 AM

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.