

Coaxial Band-stop Filter

Stopband: 2300-2400MHz

Model: TLRF-2300M-2400M-E

TLRF-2300M-2400M-E is a coaxial band-stop filter with a stop band frequency from 2300 to 2400MHz and a pass band frequency from DC to 2260MHz and 2440 to 6000MHz. The nominal insertion loss of the filter is 1.5 dB and the minimum rejection is 60 dB.

Features:

- Stopband Frequency Range 2300 to 2400MHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
阻带频率范围 Stopband Frequency rang		2300		2400	MHz
通带频率范围 Passband Frequency range		DC-2260 & 2440-600			MHz
阻带抑制 Stopband Rejection		60			dB
通带插损 Passband Insertion Loss			1.5	2	dB
通带驻波 Passband VSWR	@DC-2260MHz			1.5	:1
	@2440-5500MHz			1.5	
	@5500-6000MHz			1.8	
耐功率 Power Handling				30	W
阻抗 Impedance			50		Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
工作温度 Operating Temperature	-30 to +70	°C
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
尺寸 Size	209*38*22	mm

外形图 Outline Drawing: Unit:mm

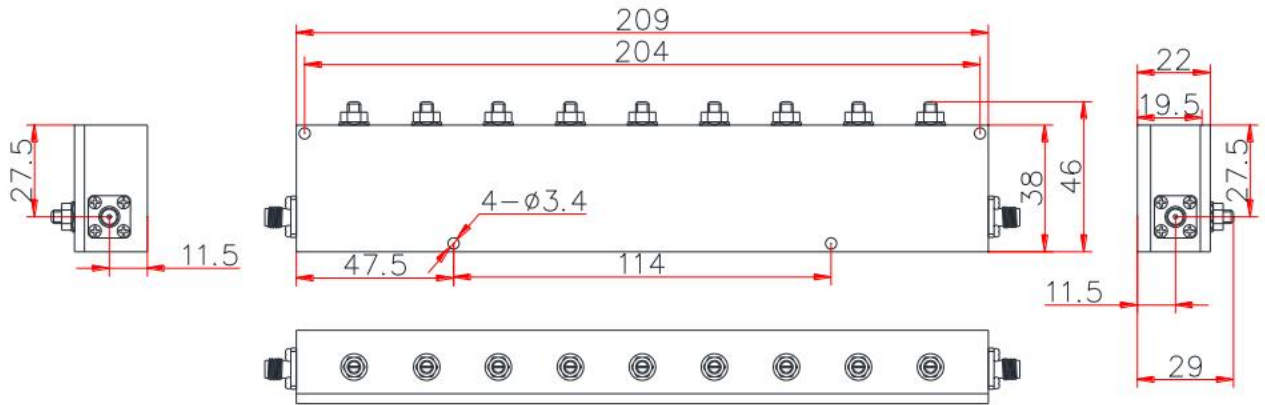

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLRF-2300M-2400M-E	Coaxial Band-stop Filter, Stopband: 2300-2400MHz, Passband: DC-2260MHz&2440-6000MHz, Stopband rejection: 60dB Min	Rev.1.0