

Coaxial Band-stop Filter

Stopband: 2500-2570MHz

Model: TLRF-2500M-2570M-E

TLRF-2500M-2570M-E is a coaxial band-stop filter with a stop band frequency from 2500 to 2570MHz and a pass band frequency from DC to 2465MHz and 2605 to 6000MHz. The nominal insertion loss of the filter is 1.5 dB and the minimum rejection is 60 dB.

Features:

- Stopband Frequency Range 2500 to 2570MHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
阻带频率范围 Stopband Frequency rang	2500		2570	MHz
通带频率范围 Passband Frequency range	DC-2465 & 2605-6000			MHz
阻带抑制 Stopband Rejection	60			dB
通带插损 Passband Insertion Loss		1.5	2	dB
通带驻波 Passband VSWR			1.5	:1
耐功率 Power Handling			30	W
阻抗 Impedance		50		Ohms

环境和机械特性 Envriotional And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
工作温度 Operating Temperature	-20 to +60	°C
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
尺寸 Size	209*37*22	mm

外形图 Outline Drawing: Unit:mm

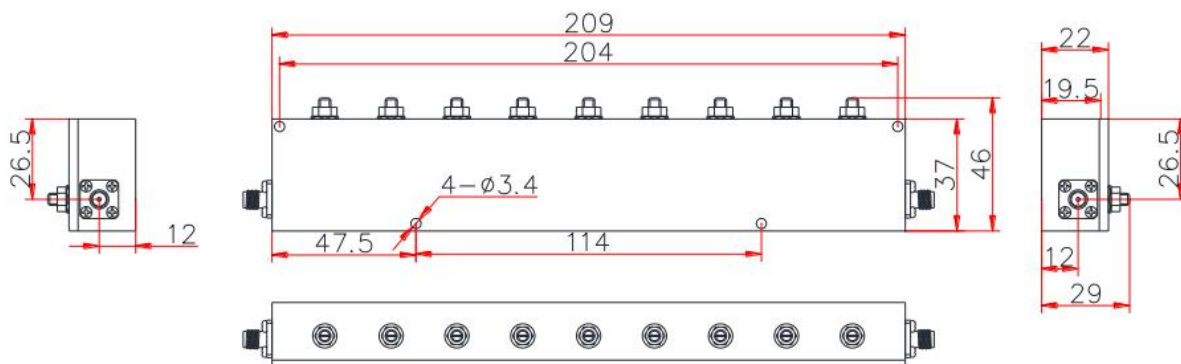

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLRF-2500M-2570M-E	Coaxial Band-stop Filter, Stopband: 2500-2570MHz, Passband: DC-2465MHz&2605-6000MHz, Stopband rejection: 60dB Min	Rev.1.0