

Part No: SAXXA2-S-8


SMA Attenuators • Male to Female • DC – 8 GHz-2W

电气特性 ELECTRICAL

- **Frequency Range** DC - 8 GHz
- **Attenuation (dB)** 1 through 9 ± 0.50 dB (**4dB**、**7 dB** are not available)
 - 10 ± 0.5 dB
 - 15 ± 0.5 dB
 - 20 ± 0.6 dB
 - 25 ± 0.6 dB
 - 30 ± 0.6 dB
 - 40 ± 1.0 dB
- **VSWR (MAX)** DC - 8GHz.....1.25:1
- **Impedance** 50 Ohms
- **RF Power Rating** **Average** : 2 Watts at 25°C Ambient Temperature
PEAK : 100 Watts
(5 μ Sec Pulse Width , 0.05% Duty Cycle)

机械特性 MECHANICAL

- **Temperature Range** -20°C - +115°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Housing** Brass ,Nickel Plated
- **Insulators** PTFE , Virgin Electrical Grade

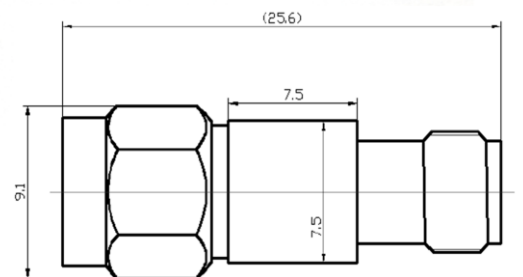

Unit : mm

订货信息 ORDER

Model Number: SAXXA2-S-8
└──────────┬──────────
 dB Value