

Coaxial Band-pass Filter

1600-2000 MHz/SMA Female

Model: TLBF-1G8-400M-E

TLBF-1G8-400M-E is a coaxial band-pass filter with a passband frequency from 1600 to 2000 MHz and a rejection frequencies from DC to 1.4 GHz and from 2.2 to 3.5 GHz. The maximum insertion loss of the filter is 1.2 dB and the minimum rejection is 45 dB.

Features:

- Passband Frequency Range 1600 to 2000 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	1600		2000	MHz
通带插损 Passband Insertion Loss			1.2	dB
带内纹波 Pass Band Ripple			1.0	dB
驻波 VSWR			1.5	:1
带外抑制 Rejection@DC-1.4GHz&2.2-3.5GHz	45			dB
耐受功率 Power Handling			15	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	12*32*65	mm

外形图 Outline Drawing: Unit:mm

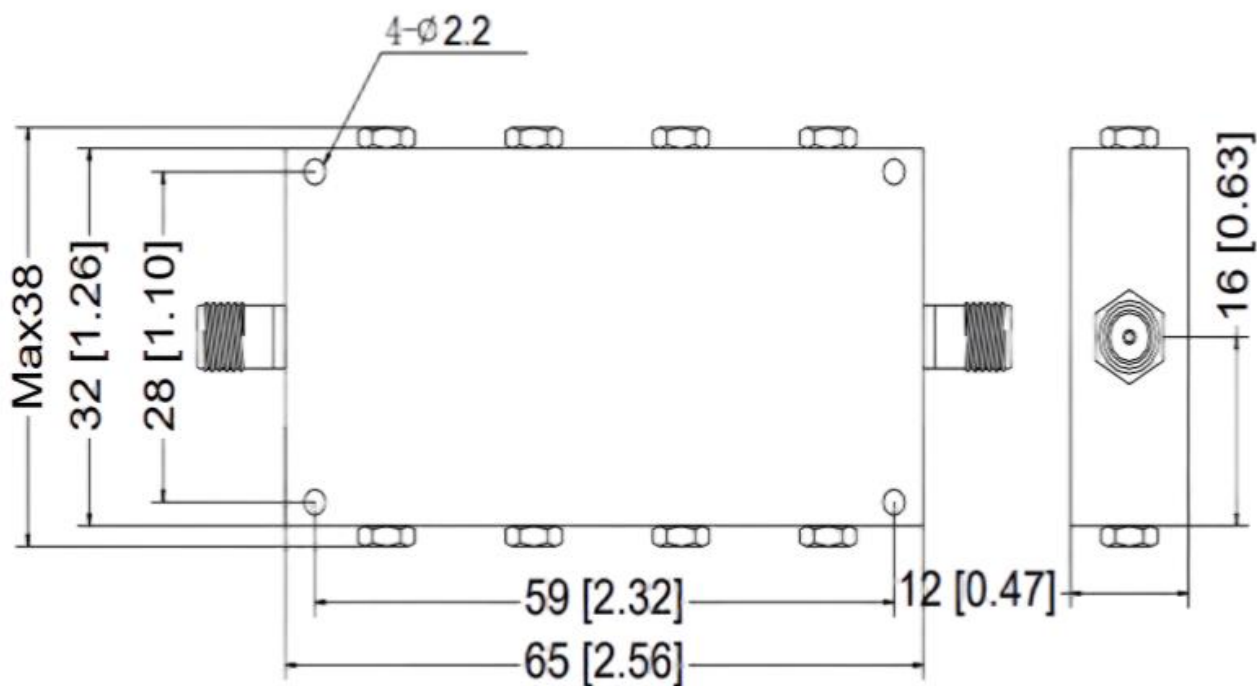


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-1G8-400M-E	Coaxial Band-pass Filter, Passband frequency range: 1600-2000MHz, Passband Insertion Loss: 1.2dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

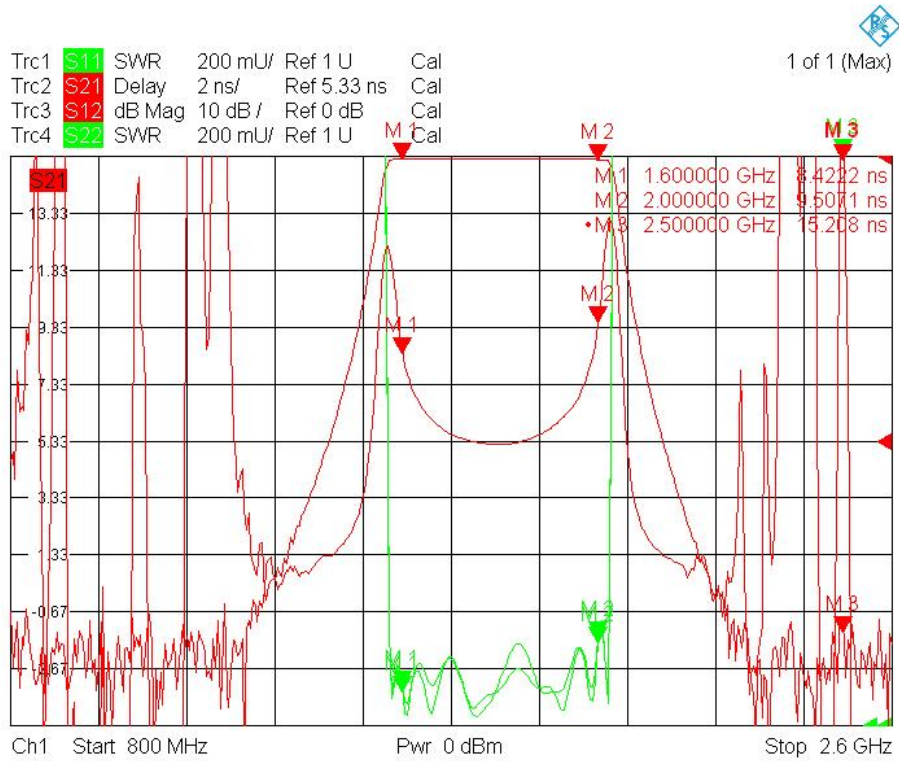

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.