

Coaxial Band-pass Filter

6.2-7.8 GHz/SMA Female

Model: TLBF-6G2-7G8-E

TLBF-6G2-7G8-E is a coaxial band-pass filter with a passband frequency from 6.2 to 7.8 GHz and a rejection frequencies from DC-5.7 GHz and 8.3-12GHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 6.2 to 7.8 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	6.2		7.8	GHz
带宽 Band Width			1.6	GHz
通带插损 Passband Insertion Loss			1.0	dB
带内波动 Pass Band Ripple	0.9			dB
带外抑制 Rejection	≥40dB@DC-5.7GHz 8.3-12GHz			dB
耐受功率 Power Handling			10	W
驻波 VSWR			1.6	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
材质 Material	Gold-plated oxygen-free copper	
接口 Connectors	SMA Female	

外形图 Outline Drawing: Unit:mm

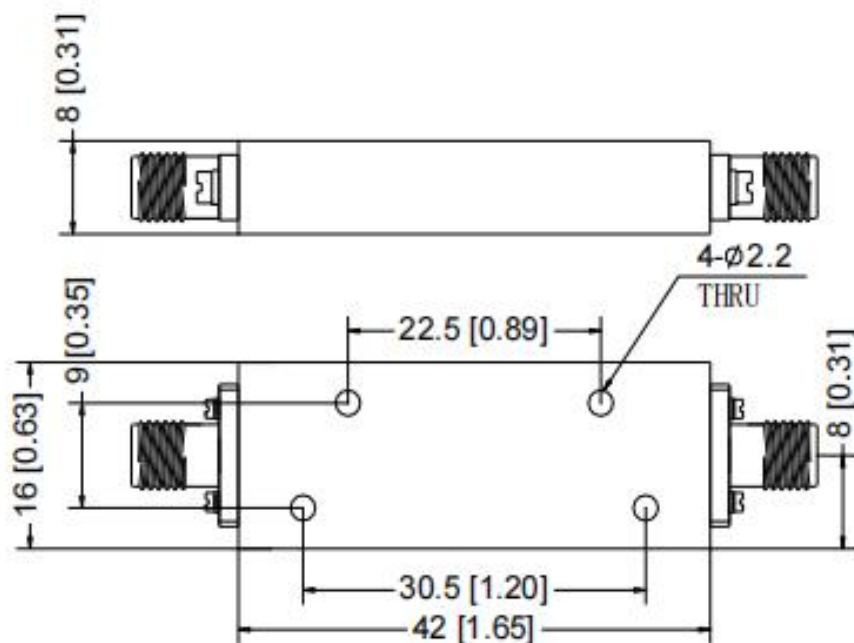

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-6G2-7G8-E	Coaxial Band-pass Filter, Passband frequency range: 6.2-7.8GHz, Passband Insertion Loss: 1.0dB, SMA Female	Rev.1.0