

Model:TMAM-110170-1202-06**D-Band Active Multiplier**
X12, 110-170 GHz, +2 dBm Output Power**Feature:**

- Output Frequency: 110-170 GHz
- Output Power : 2dBm Typ
- Low power consumption

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Output Frequency	110		170	GHz
Output Power		2		dBm
Input Frequency	9.16		14.17	GHz
Input Power	3	5	7	dBm
Multiply Factor		12		
DC Voltage		12		V
DC Supply Current		250		mA

Mechanical Specifications:



Parameter	Value	Units
Output Connector	WR-06/UG-387/U	
Input Connector	SMA Female	
Bias	Solder Pin	
Size	50*28*23	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+10 dbm
ESD sensitivity (Hbm)	Class 0, passed 150V

Outline Drawing:

Unit: mm

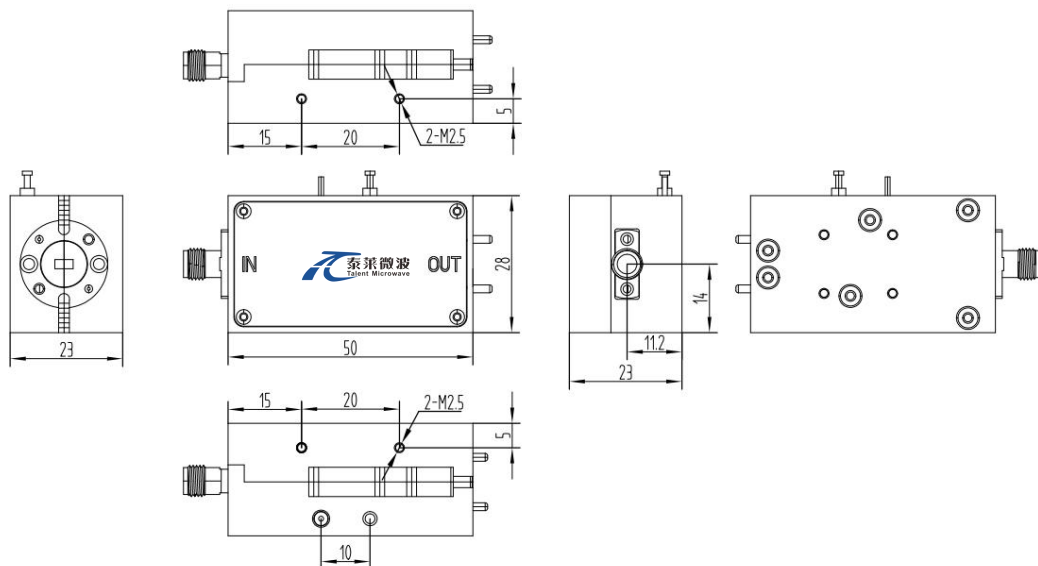

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-25		+75	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TMAM-110170-1202-06	Active Multiplier,X12,110-170GHz, Output Power:2dBm,WR-06/UG-387/U,SMA Female	Rev.1.1

Typical Performance Data:

Output Power vs Frequency

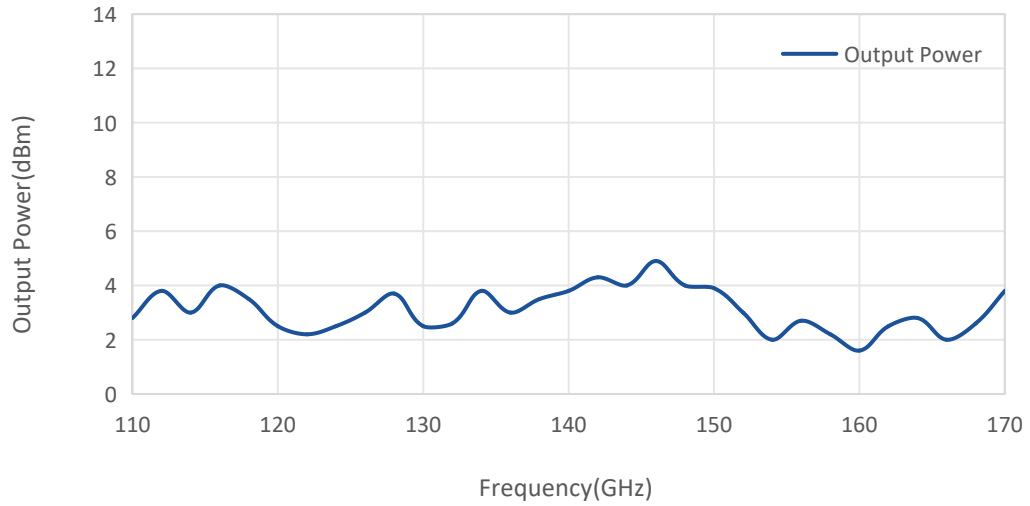

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.