

Coaxial Band-pass Filter

8-12 GHz/SMA Female

Model: TLBF-8G-12G-X

TLBF-8G-12G-X is a coaxial band-pass filter with a passband frequency from 8 to 12 GHz and a rejection frequencies from DC-6.8GHz and 13.8 GHz. The maximum insertion loss of the filter is 1.2 dB and the typical rejection is 45 dB.

Features:

- Passband Frequency Range 8 to 12 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	8		12	GHz
带宽 Band Width			4	GHz
通带插损 Passband Insertion Loss			1.2	dB
带内波动 Pass Band Ripple			1.0	dB
带外抑制 Rejection	>45@dc-6.8Ghz 13.8Ghz			dB
耐受功率 Power Handling			15	W
驻波 VSWR			1.6	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	

外形图 Outline Drawing:

Unit:mm

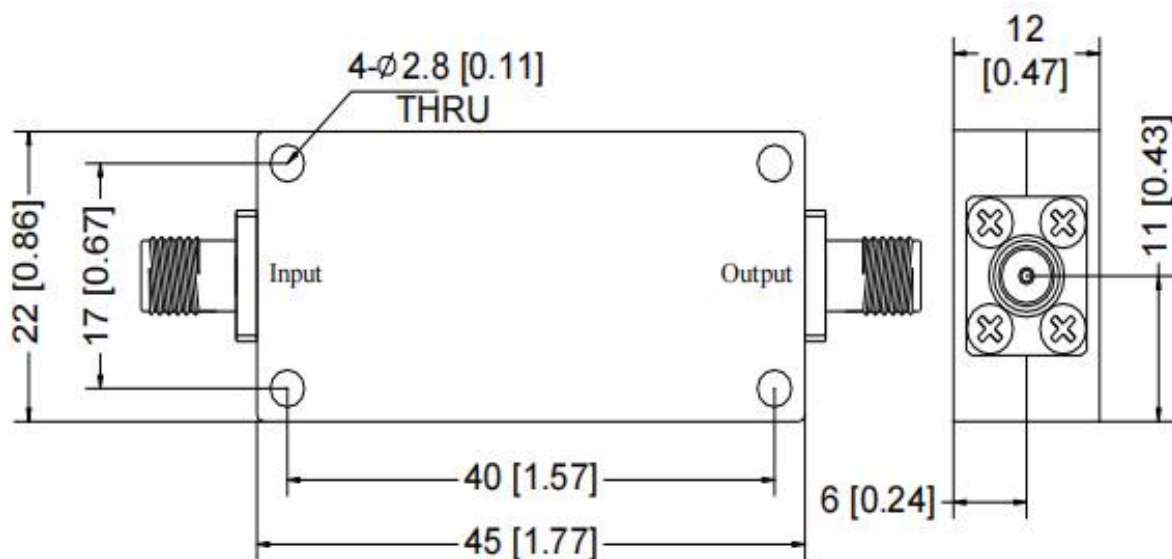


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-8G-12G-X2	Coaxial Band-pass Filter, Passband frequency range: 8-12GHz, Passband Insertion Loss: 1.2dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

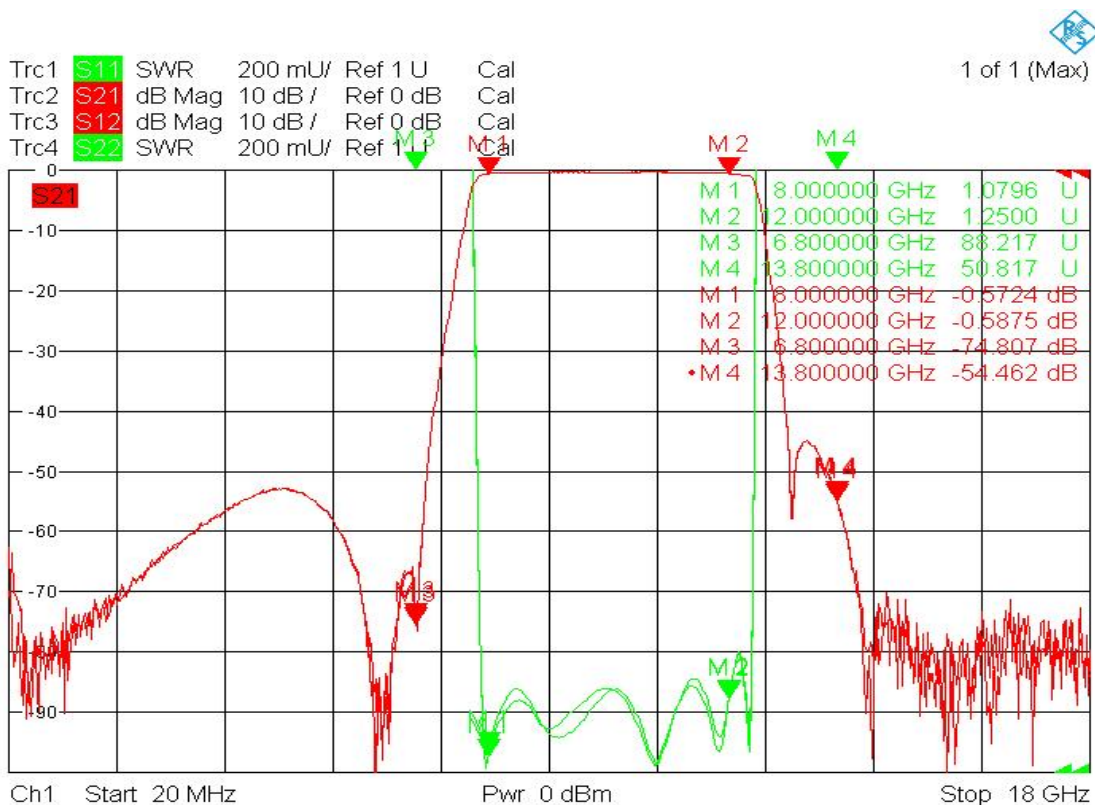

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.