

**Model:TLPA2G6G-50-50-BC**
**Solid State High Power Amplifier Systems  
 2-6GHz,Gain:50dB,Psat:50dBm,+220V AC**
**Feature:**

- Wide Band: 2-6GHz
- Gain: 50dB Min
- Psat Output Power:50dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output


**Electrical Specifications:**

Parameter	Symbo	Min	Typ	Max	Units
Frequency range	BW	2-6			GHz
Gain	GP	50			dB
Gain flatness	$\Delta$ GL		$\pm 4.5$		dB
Output Psat	Psat	50			dBm
Output P1dB	P1dB		45		dBm
Spurious@Pout=50dBm	Spur			-60	dBc
Harmonics@Pout=50dBm	HAM			-10	dBc
Input VSWR	VSWRin			2.0	:1
AC Voltage	Vac	220			V AC
AC Power Consumption	Pdiss	1500@Max			Watts
Impedance	I/O-IMP	50			Ohms

**机械特性 Mechanical Specifications:**

Parameter	Value	Units
Input/Output Connector	N Female/SMA Female	
Monitor and control interface	RS422 / Ethernet	
Size	19 Inch*4U*550 depth	mm
Weight	25	Kg

**Absolute Maximum Ratings:**

Parameter	Value
RF Input Power	10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

**Outline Drawing:**

Unit: mm



**Key Features:**



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

Parameter	Advantages
Remote control	RS422/Ethernet
Protection functions	1,Over TEM 2,Over voltage 3,Over current protection 4,Over VSWR
Control functions	1,Power setting On/Off 2,ALC
Cooling system	Built in Cooling system,forced air cooling

### Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10000			feet
Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


\*Note: For a wider temperature range, please consult the manufacturer.

### Ordering Information:

Part Number	Description	Revision
TLPA2G6G-50-50-BC	Solid State High Power Amplifier Systems 2-6GHz,Gain:50dB,Psat:50dBm,220V AC,Built in Fan Cooling	Rev.1.0

### Typical Performance Data:


Small Signal Gain vs Frequency

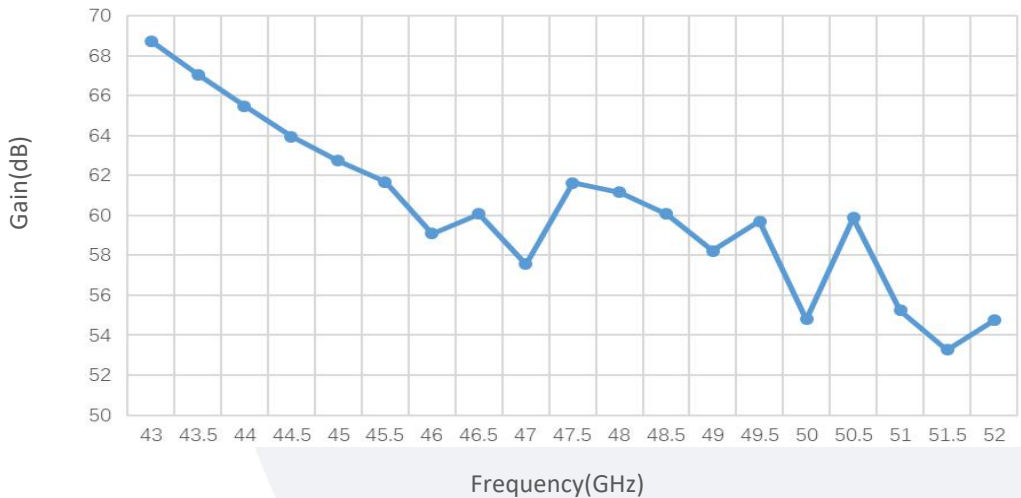


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Input VSWR vs Frequency

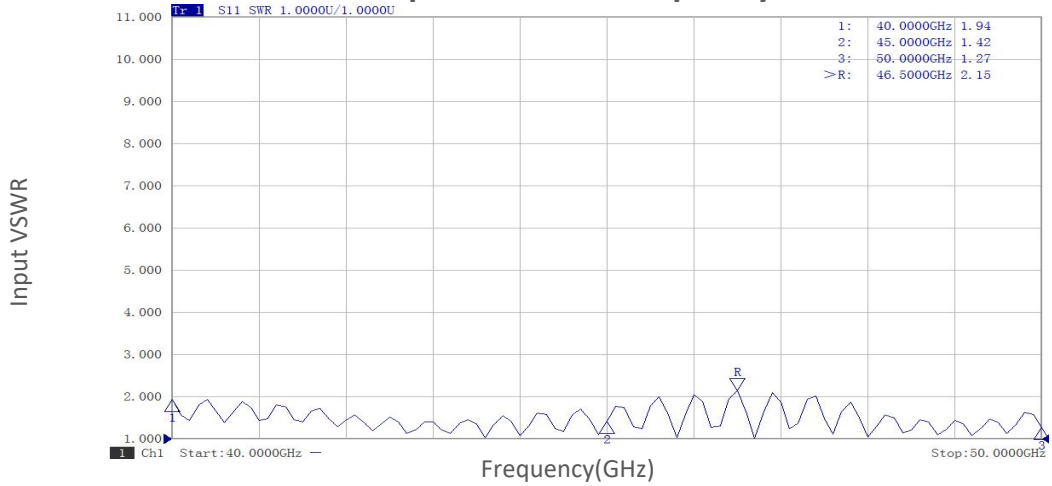

P1dB vs Frequency

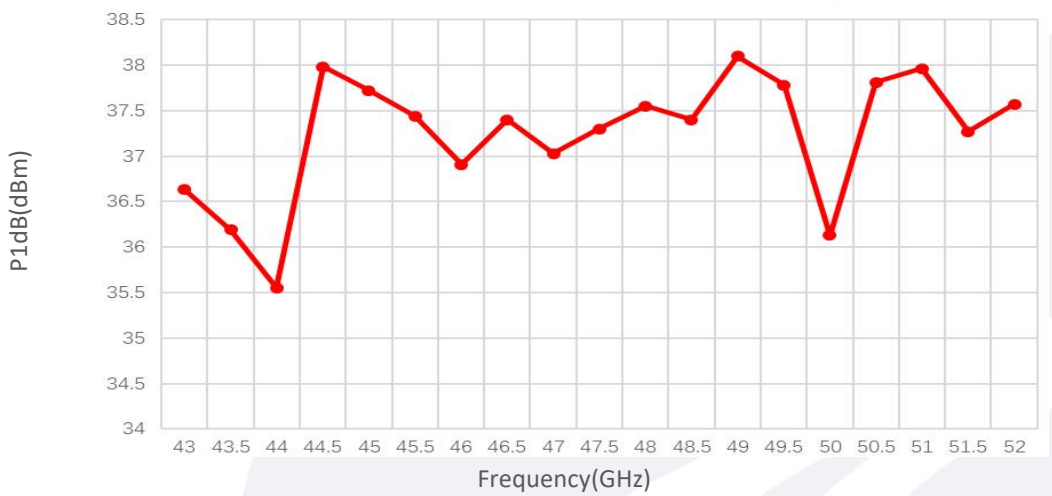


Pout@Pin

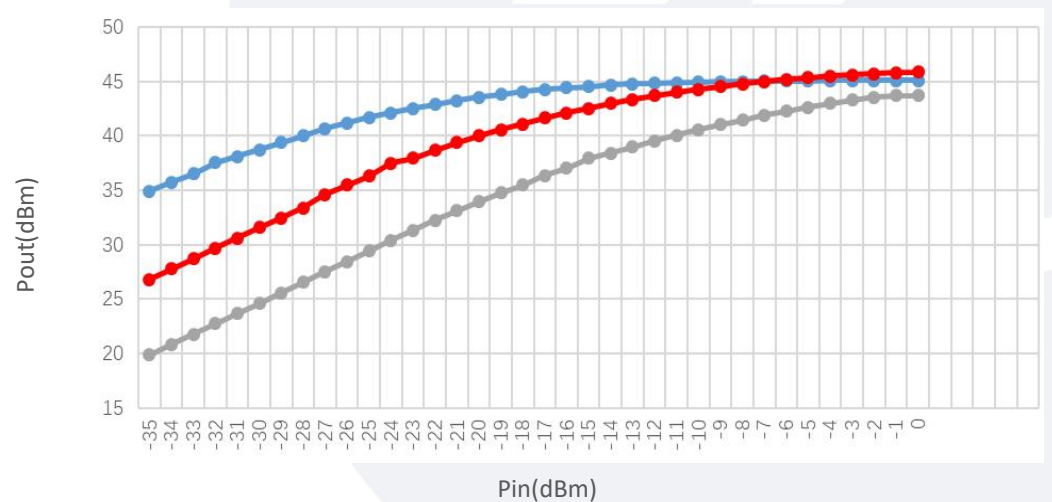


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Pout@Equal\_Pin

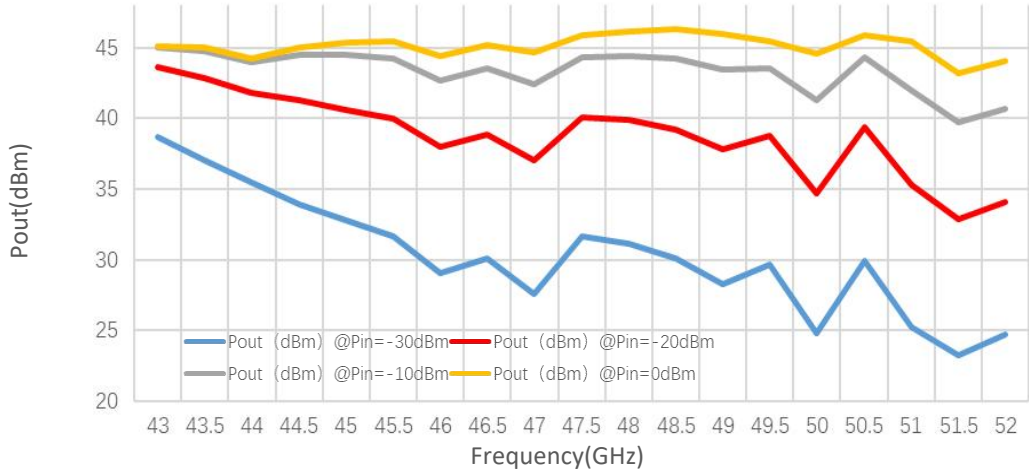

Spurious vs Frequency

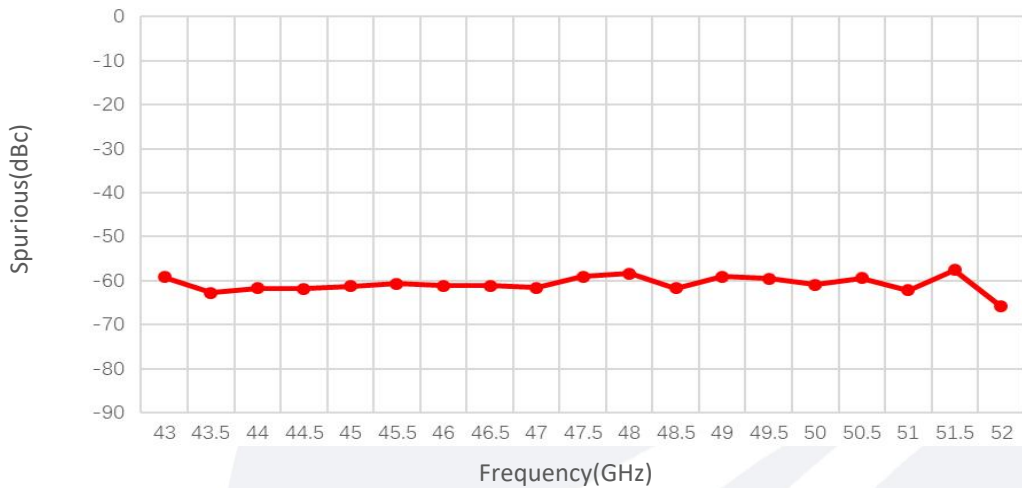

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.