

Coaxial Band-pass Filter

8-12 GHz/SMA Female

Model: TLBF-8G-12G-X6

TLBF-8G-12G-X6 is a coaxial band-pass filter with a passband frequency from 8 to 12 GHz and a rejection frequencies from DC-7GHz and 13GHz. The maximum insertion loss of the filter is 1.0 dB and the typical rejection is 15 dB.

Features:

- Passband Frequency Range 8 to 12 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	8		12	GHz
带宽 Band Width			4	GHz
通带插损 Passband Insertion Loss			1.0	dB
带内波动 Pass Band Ripple			0.9	dB
带外抑制 Rejection	>15dB@dc-7Ghz 13Ghz			dB
耐受功率 Power Handling			15	W
驻波 VSWR			1.8	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	

外形图 Outline Drawing:

Unit:mm

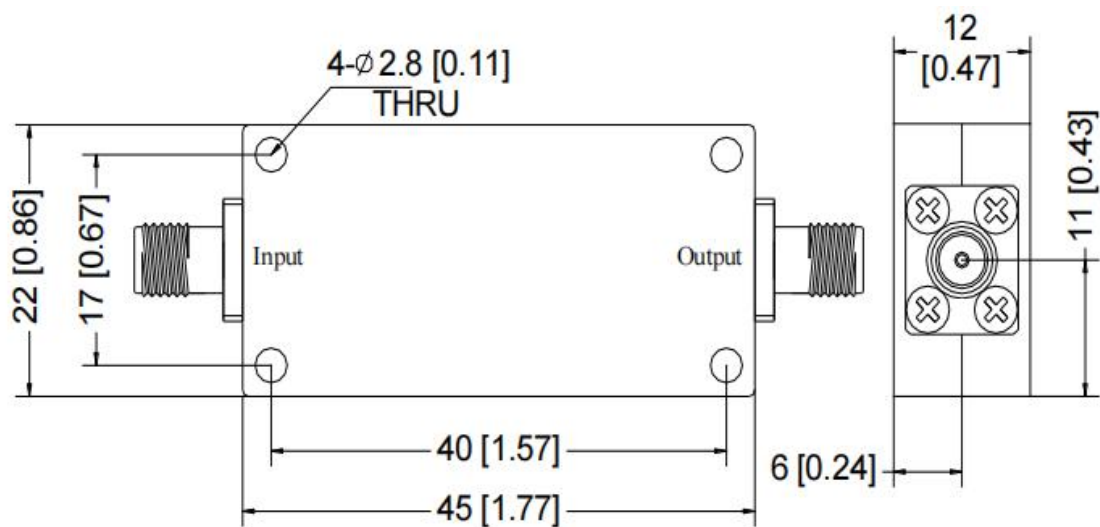

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-8G-12G-X6	Coaxial Band-pass Filter, Passband frequency range: 8-12GHz, Passband Insertion Loss: 1.0dB, SMA Female	Rev.1.0