

Coaxial Band-pass Filter

12.35-12.85 GHz/SMA Female

Model: TLBF-12G6-500M-E

TLBF-12G6-500M-E is a coaxial band-pass filter with a passband frequency from 12.35 to 12.85 GHz and a rejection frequencies from 11.35 GHz to 13.85 GHz. The maximum insertion loss of the filter is 1.5 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 12.35 to 12.85 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	12.35		12.85	GHz
带宽 Band Width			0.5	GHz
通带插损 Passband Insertion Loss			1.5	dB
带内波动 Pass Band Ripple			1.2	dB
带外抑制 Rejection	>40dB@fc±1GHz 2次谐波 > 60db			dB
耐受功率 Power Handling			15	W
驻波 VSWR			1.5	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	°C
接口 Connectors	SMA Female	
重量 Weight	/	g

外形图 Outline Drawing:

Unit:mm

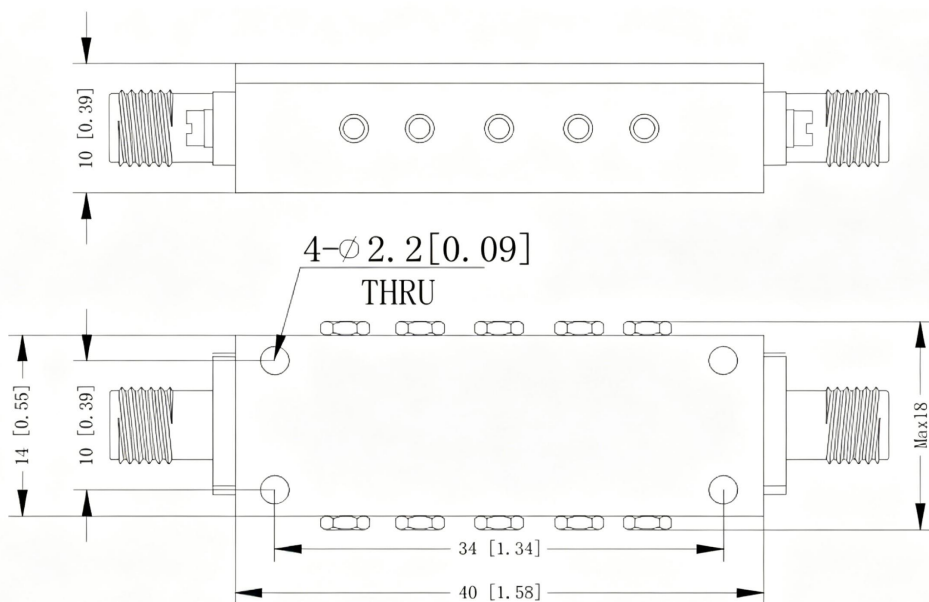


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-12G6-500M-E	Coaxial Band-pass Filter, Passband frequency range: 12.35-12.85GHz, Passband Insertion Loss: 1.5dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

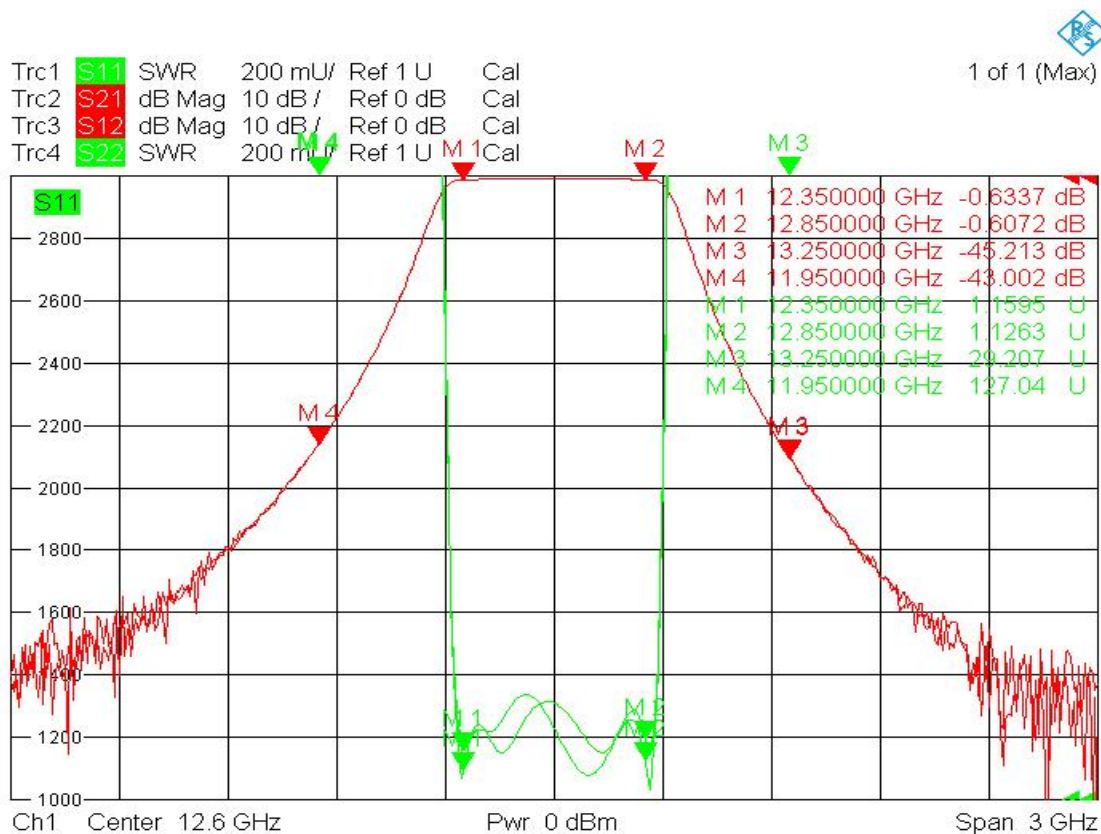

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.