

Coaxial Band-pass Filter

14.42-14.5 GHz/SMA Female

Model: TLBF-14G46-80M-E

TLBF-14G46-80M-E is a coaxial band-pass filter with a passband frequency from 14.42 to 14.5 GHz and a rejection frequency @13.35 GHz. The maximum insertion loss of the filter is 2.0 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range 14.42 to 14.5 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	14.42		14.5	GHz
带宽 Band Width			80	MHz
通带插损 Insertion Loss			2.0	dB
带内波动 Pass Band Ripple			1.8	dB
带外抑制 Rejection	>50dBc@13.35Ghz			dB
耐受功率 Power Handling			30	W
驻波 VSWR			1.5	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
重量 Weight	/	g

外形图 Outline Drawing:

Unit:mm

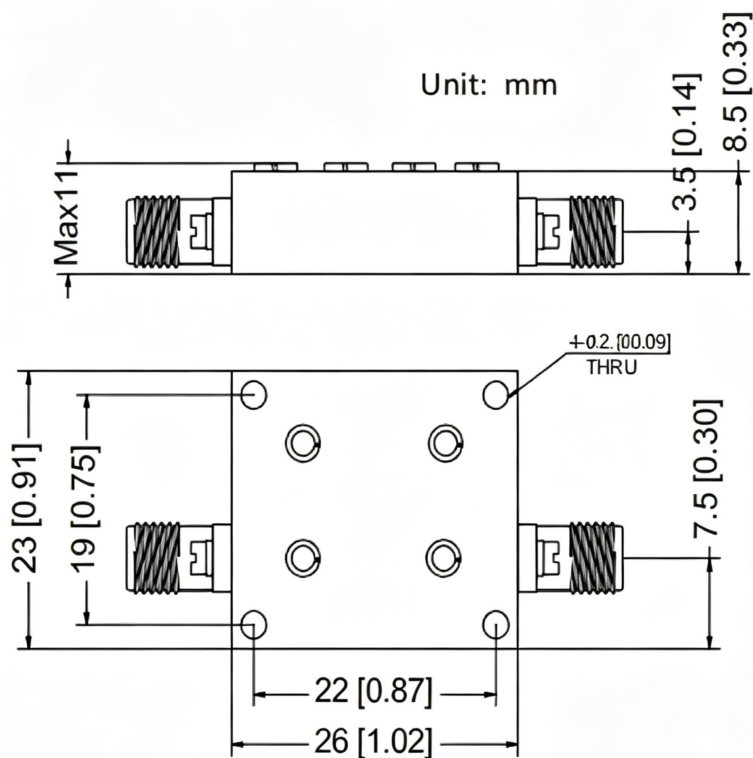

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-14G46-80M-E	Coaxial Band-pass Filter, Passband frequency range: 14.42-14.5GHz, Passband Insertion Loss: 2.0dB, SMA Female	Rev.1.0