

Coaxial Band-pass Filter

18-26.5 GHz/SMA Female

Model: TLBF-18G-26G5-X

TLBF-18G-26G5-X is a coaxial band-pass filter with a passband frequency from 18 to 26.5 GHz and a rejection frequencies from DC-16 GHz and 29 GHz. The maximum fo insertion loss of the filter is 1.8 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 18 to 26.5 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	18		26.5	GHz
插损 Insertion Loss			1.8	dB
带内波动 Pass Band Ripple			1.6	dB
带外抑制 Rejection	>40dB@dc-16Ghz 29Ghz			dB
耐受功率 Power Handling			15	W
驻波 VSWR			2.0	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	

外形图 Outline Drawing:

Unit:mm

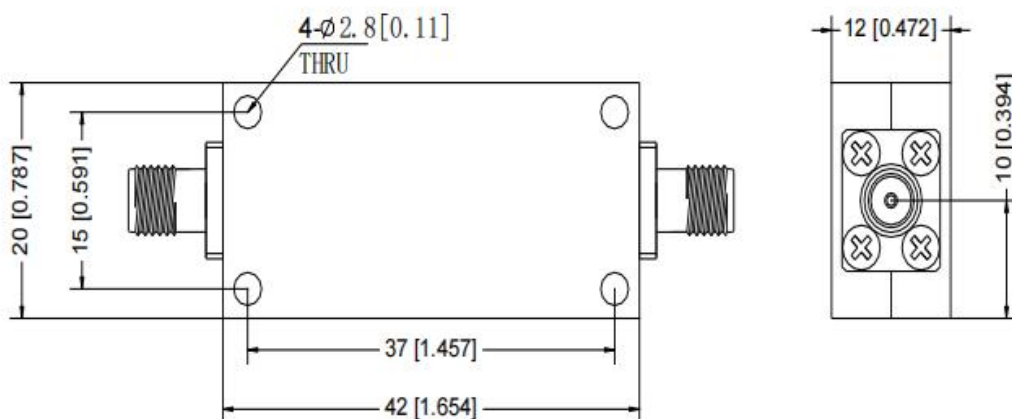


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-18G-26G5-X	Coaxial Band-pass Filter, Passband frequency range: 18-26.5GHz, Passband Insertion Loss: 1.8dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

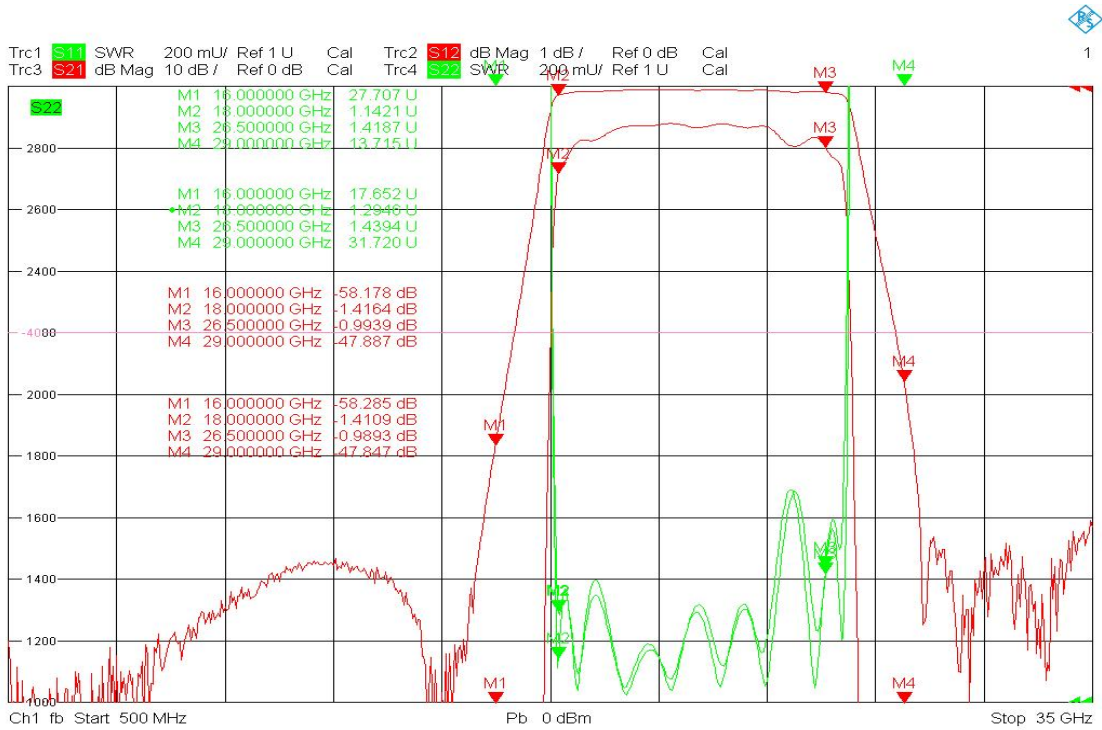

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.