

Coaxial Band-pass Filter

19-21 GHz/SMA Female

Model: TLBF-19G-21G-E

TLBF-19G-21G-E is a coaxial band-pass filter with a passband frequency from 19 to 21 GHz and a rejection frequencies from DC-17.5 GHz and 22.5 GHz. The maximum fo insertion loss of the filter is 1.5 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 17 to 21 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	17		21	GHz
带宽 Band Width			3	GHz
插损 Insertion Loss			1.5	dB
带内波动 Pass Band Ripple			0.8	dB
带外抑制 Rejection	>40dB@DC-17.5GHz 22.5Ghz			dB
相位不平衡 Phase Unbalance	< 5°(1:6)			
耐受功率 Power Handling			20	W
驻波 VSWR			1.5	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	

外形图 Outline Drawing:

Unit:mm

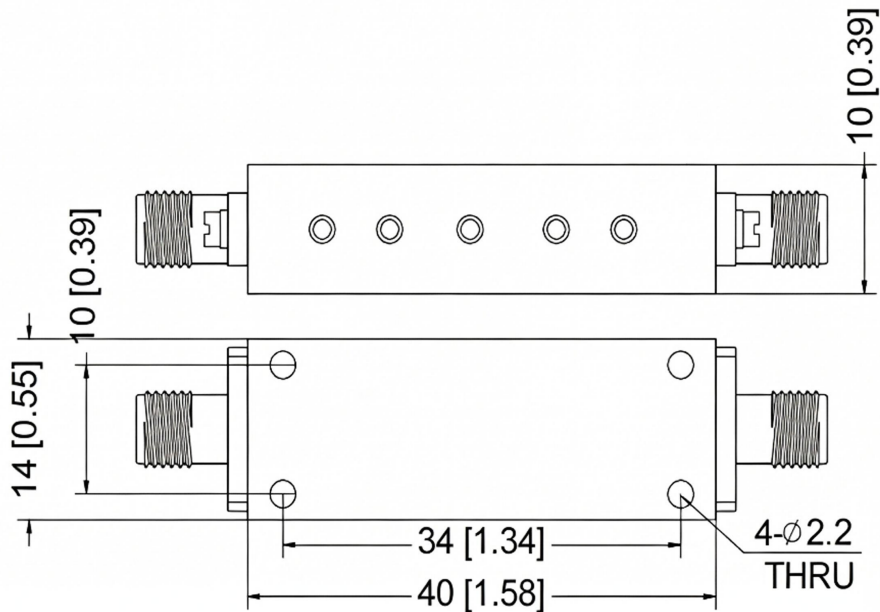


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-19G-21G-E	Coaxial Band-pass Filter, Passband frequency range: 19-21GHz, Passband Insertion Loss: 1.5dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

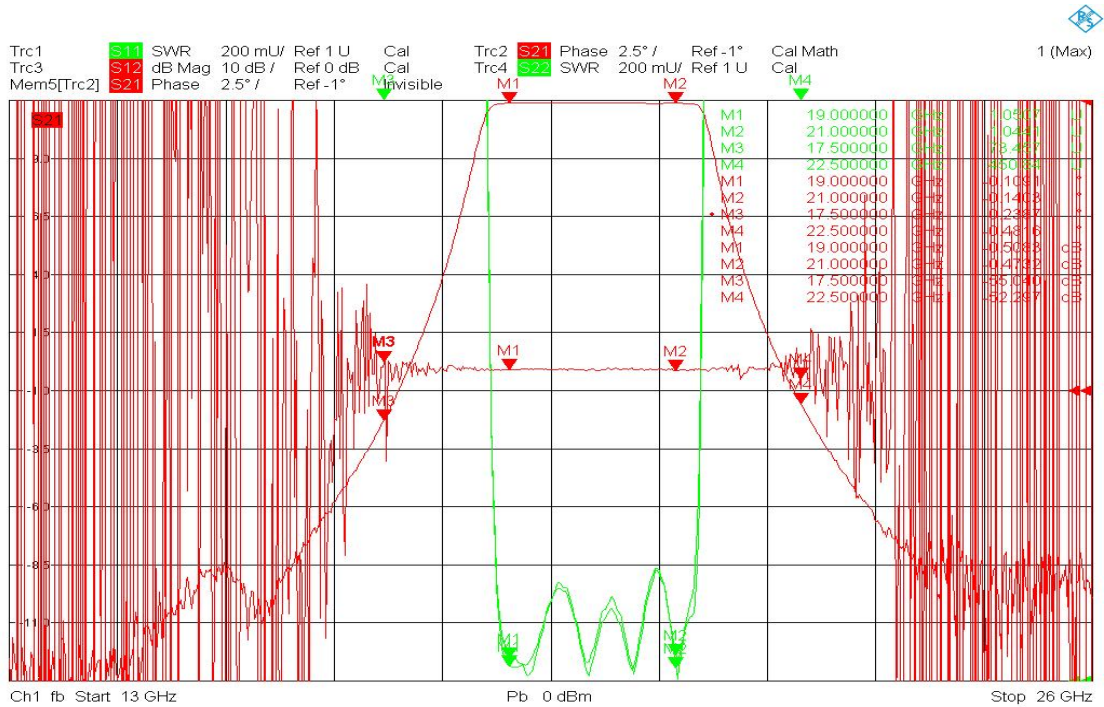

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.