

Low Noise Amplifier

0.1-18GHz /3.0dB NF/12dB Gain/8 dBm P1dB

Model: TLLA0.1G18G-12-30

TLLA0.1G18G-12-30 is a low noise amplifier with a small signal gain of 12 dB and a nominal noise figure of 3.0 dB across the frequency range of 0.1 to 18 GHz. The DC power requirement for the amplifier is +15 V DC/125 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band:0.1-18GHz
- Gain: 12dB Min
- Noise Figure: 3.0dB Max
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.1		18	GHz
Gain	12			dB
Gain Flatness			±2.0	dB
Noise Figure			3.0	dB
Output P1dB	8			dBm
Input VSWR		2.0	2.5	:1
Output VSWR		2.0	2.5	:1
DC Voltage		15		V DC
DC Supply Current		125		mA
Impedance		50		Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	17.78*10.9*4.57	mm
Weight	/	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

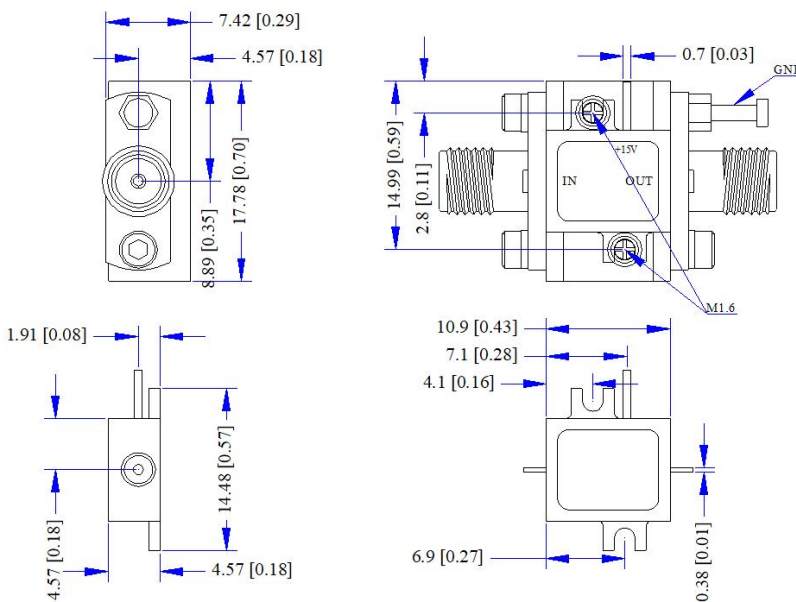

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-30		+75	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLLA0.1G18G-12-30	Low Noise Amplifier, 0.1-18GHz, Noise Figure:3.0dB, Gain:12 dB,P1dB:8dBm,+15V DC,Without Heatsink	Rev.1.1
TLLA0.1G18G-12-30-HS	Low Noise Amplifier, 0.1-18GHz, Noise Figure:3.0dB, Gain:12 dB,P1dB:8dBm,+15V DC,With Heatsink	Rev.1.1