

Coaxial Band-pass Filter

Center Frequency 26 MHz/SMA Female

Model: TLBF-26M-1M-L

TLBF-26M-1M-L is a coaxial band-pass filter with a passband center frequency at 26 MHz and a rejection frequencies from DC to 3 MHz and from 29 to 31 MHz . The maximum insertion loss of the filter is 6.5 dB and the minimum rejection is 60 dB.

Features:

- Passband Center Frequency 26 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	25.5		26.5	MHz
带宽 Band Width			1	MHz
插损 Insertion Loss(f0)			6.5	dB
带内纹波 Pass Band Ripple			5.5	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@DC-3MHz&29-31MHz	60			dB
耐受功率 Power Handling			2	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	12*25*40	mm

外形图 Outline Drawing: Unit:mm

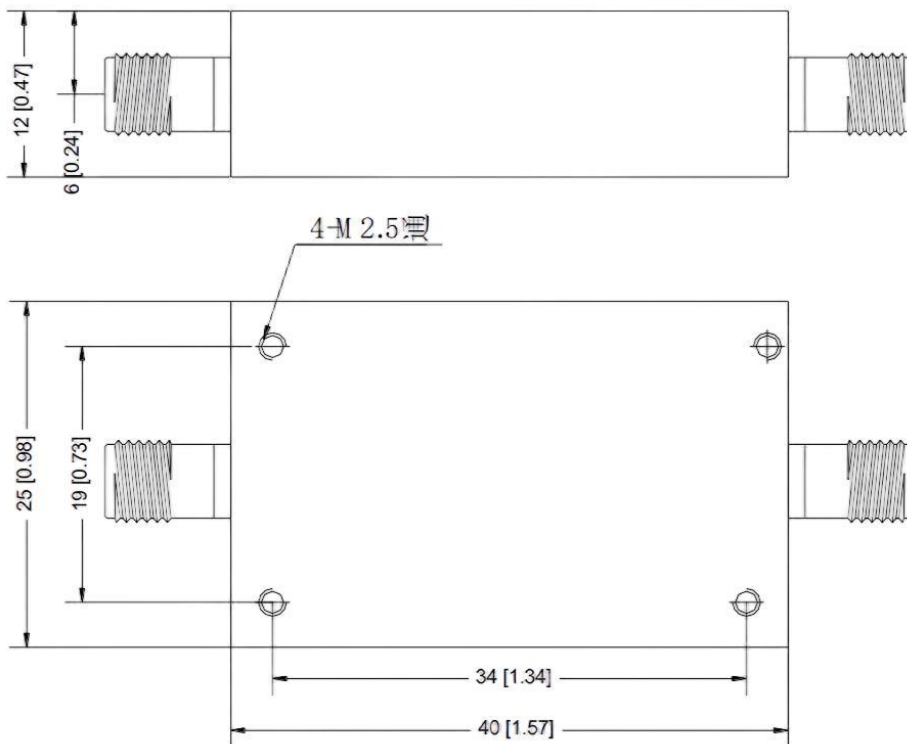

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-26M-1M-L	Coaxial Band-pass Filter, Passband center frequency: 26MHz, Insertion Loss(f0): 6.5dB, SMA Female	Rev.1.0