

Coaxial Band-pass Filter

80-120 MHz/SMA Female

Model: TLBF-80M-120M-L

TLBF-80M-120M-L is a coaxial band-pass filter with a passband frequency from 80 to 120 MHz and a rejection frequencies at $f_c \pm 20$ MHz. The maximum insertion loss of the filter is 2.0 dB and the minimum rejection is 30 dB.

Features:

- Passband Frequency Range 80 to 120 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	80		120	MHz
带宽 Band Width			40	MHz
插损 Insertion Loss(f_0)			2.0	dB
带内纹波 Pass Band Ripple			1.8	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@ $f_c \pm 20$ MHz	30			dB
耐受功率 Power Handling			2	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	10*12*40.4	mm

外形图 Outline Drawing:

Unit:mm

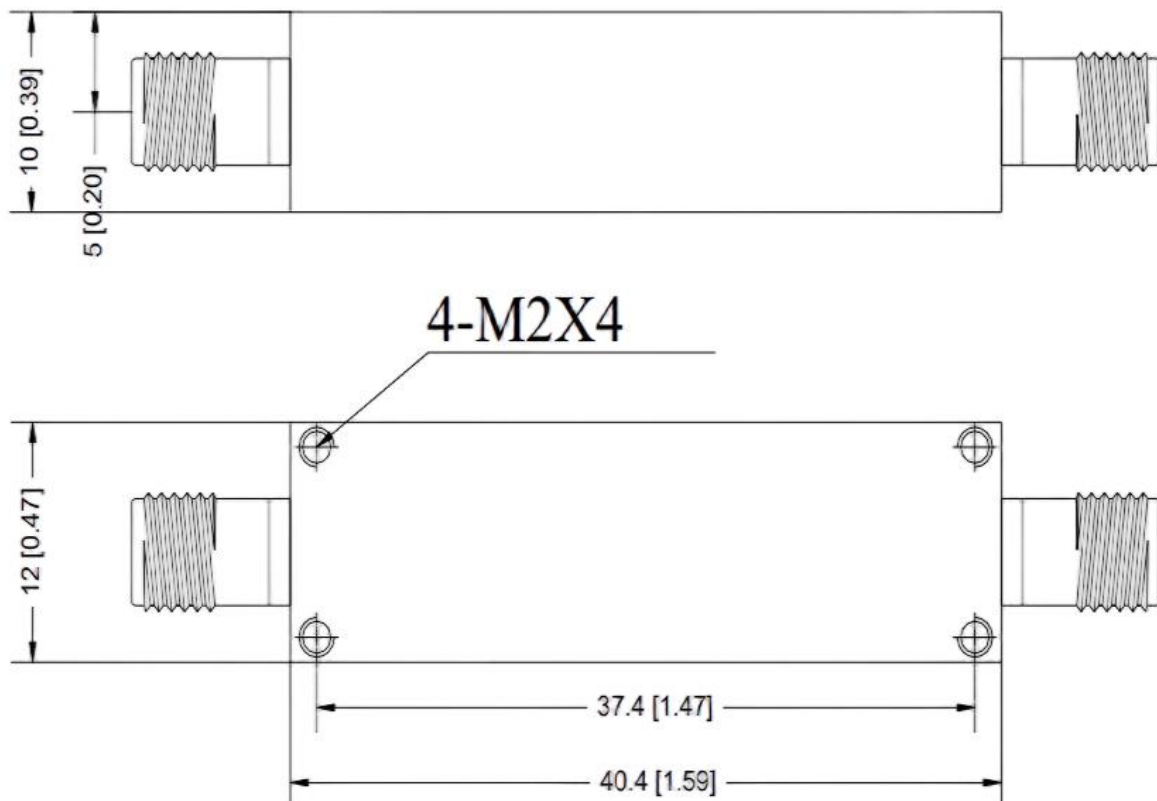


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-80M-120M-L	Coaxial Band-pass Filter, Passband frequency range: 80-120MHz, Insertion Loss(f0): 2.0dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

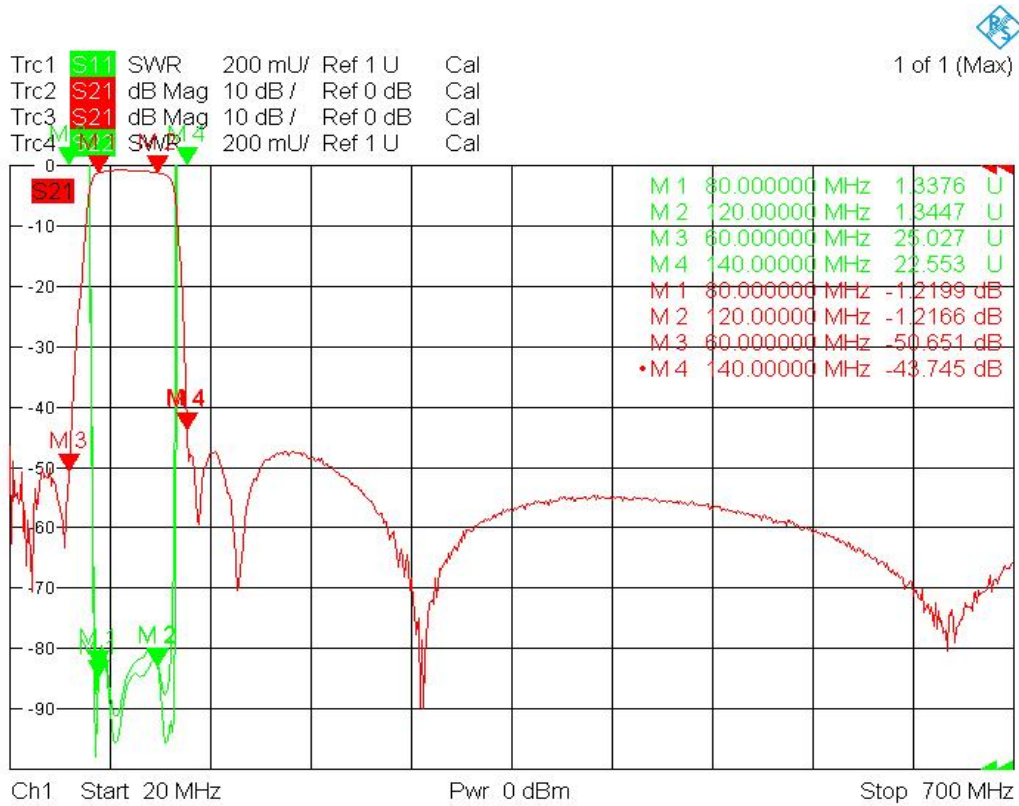

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.