

Absorptive, Broadband MMIC Switch

0.01-26.5 GHz/SP4T/ SMA Female

Model: TLSP4T0.01G26.5GA

The TLSP4T0.01G26.5GA is an absorptive MMIC switch with a TTL driver that operates between 0.01 and 26.5 GHz. The SP4T switch offers 70 dB port-to-port isolation with a typical switching speed of 100 nanoseconds. The input and output connectors of the switch are SMA female.

Features:

- Ultra Wide Band: 0.01-26.5GHz
- Low Insertion Loss: 4.0 dB
- Power Handling : 25 dBm
- High Isolation
- Switch Type: Absorptive

Applications:

- Communication Systems
- Automatic Test Equipment
- Switching Network

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.01-26.5			GHz
Insertion Loss		4	6	dB
Isolation	60	70		dB
Switch Speed		100		ns
Input VSWR		2	3	:1
Output VSWR		2	3	:1
Power Handling			25	dBm
DC Voltage		5		V DC
DC Supply Current		20		mA
Switch type	Absorptive			
Impedance	50			Ohms

Absolute Maximum Ratings :


Description	Parameter	Units
Supply Bias Voltage	$\pm 5\%$	V
RF Input Power	25	dBm
ESD sensitivity (HBm)	Class 0, passed 150V	

Mechanical Specifications:

Description	Parameter	Units
Input /Output Connector	SMA Female/SMA Female	
Control Bias	Solder Pin	
Size	50.8*30*10.2	mm

Outline Drawing:

Unit:mm

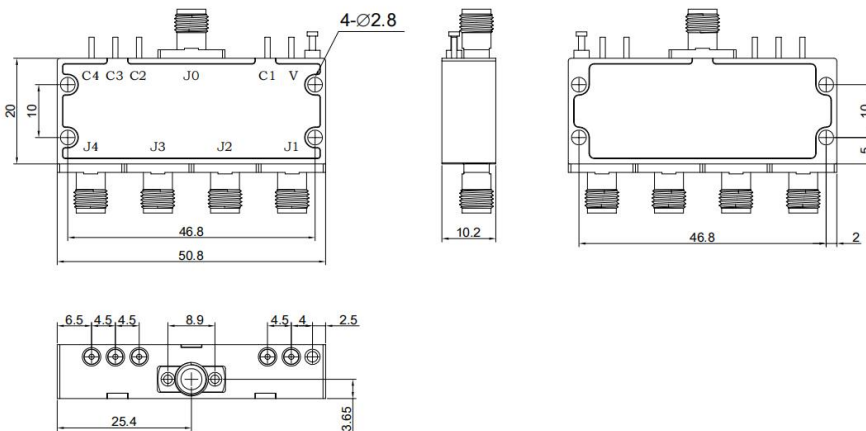

Truth Table				
TTL Control Input				Signal Path State
C4	C3	C2	C1	
0	0	0	0	J0-J1
0	0	1	0	J0-J2
0	1	0	0	J0-J3
1	0	0	0	J0-J4

1. Dimensions are in mm [inches]
 2. Tolerances: Outline drawing ± 0.2 [0.008] Hole ± 0.2 [0.008]
 NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V ($\pm 5\%$)
Low (0)	0 to 0.8Vdc
High (1)	+3.3 to +5.0Vdc



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


Ordering Information:

Base Number	Description	Revision
TLSP4T0.01G26.5GA	Absorptive,Broadband MMIC Switch 0.01-26.5 GHz,SP4T,SMA	Rev.1.1

Typical Performance Data:

Insertion Loss&VSWR vs Frequency


J0-J1:

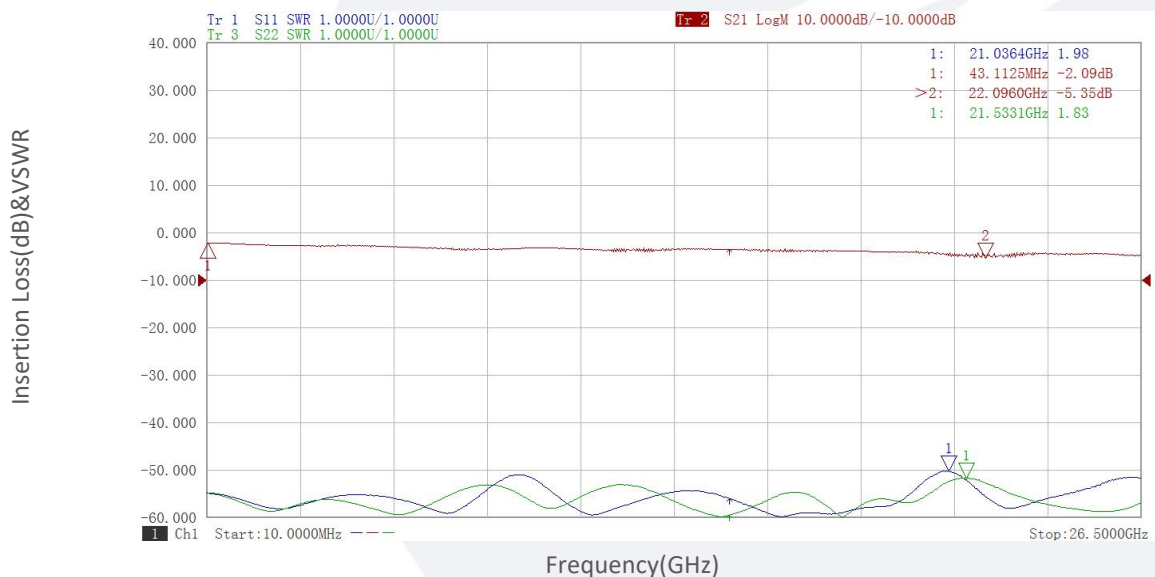


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

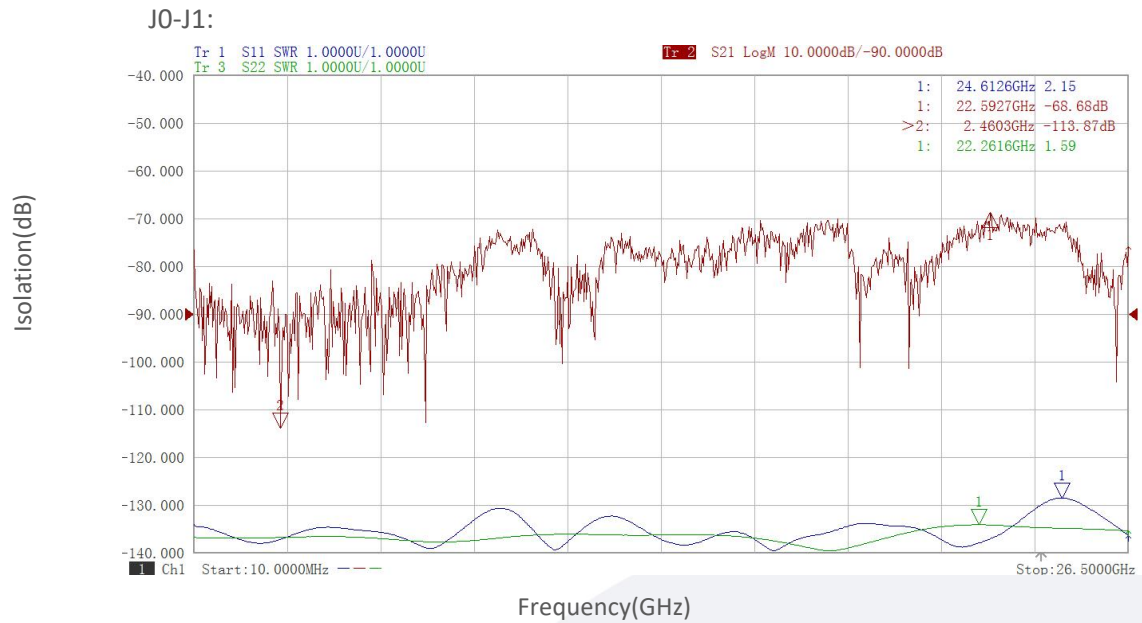


Insertion Loss & VSWR vs Frequency

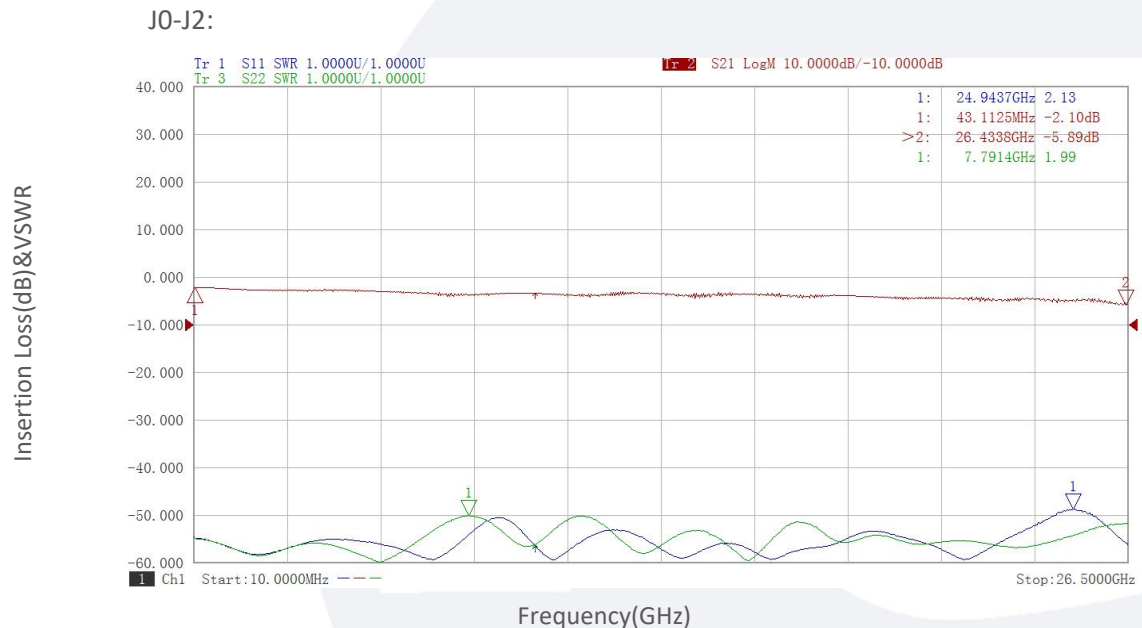


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

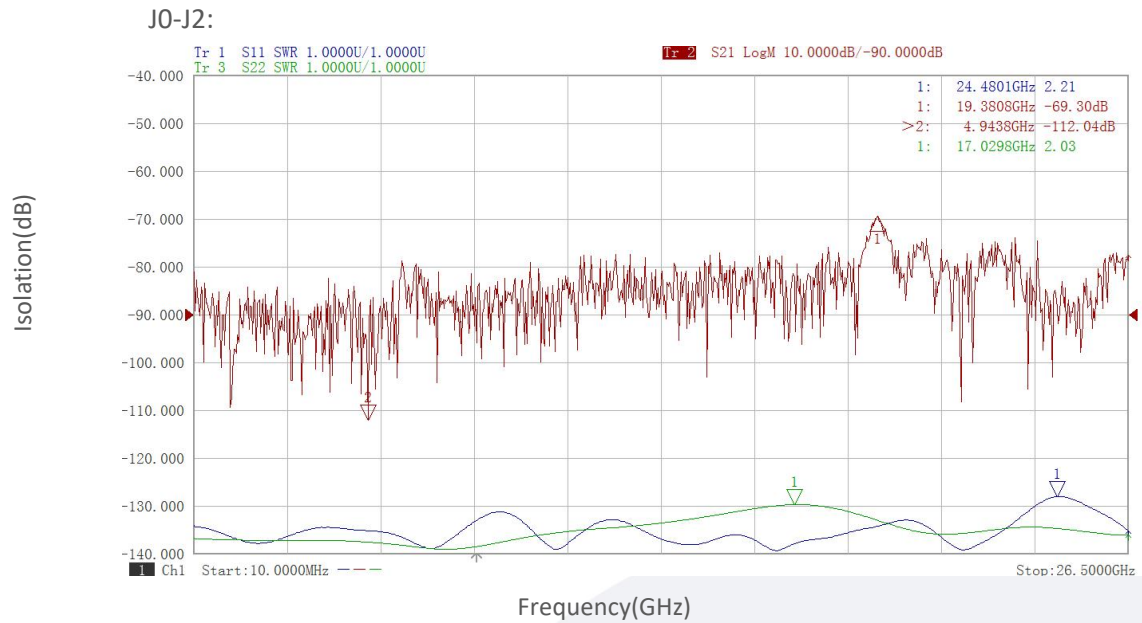


Insertion Loss & VSWR vs Frequency

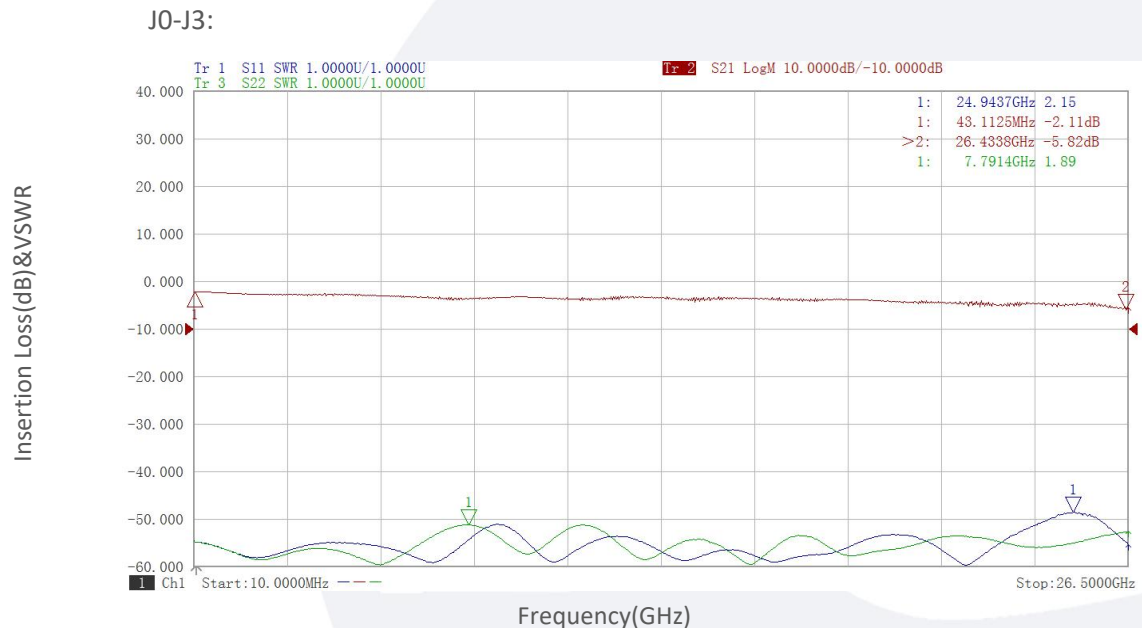


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

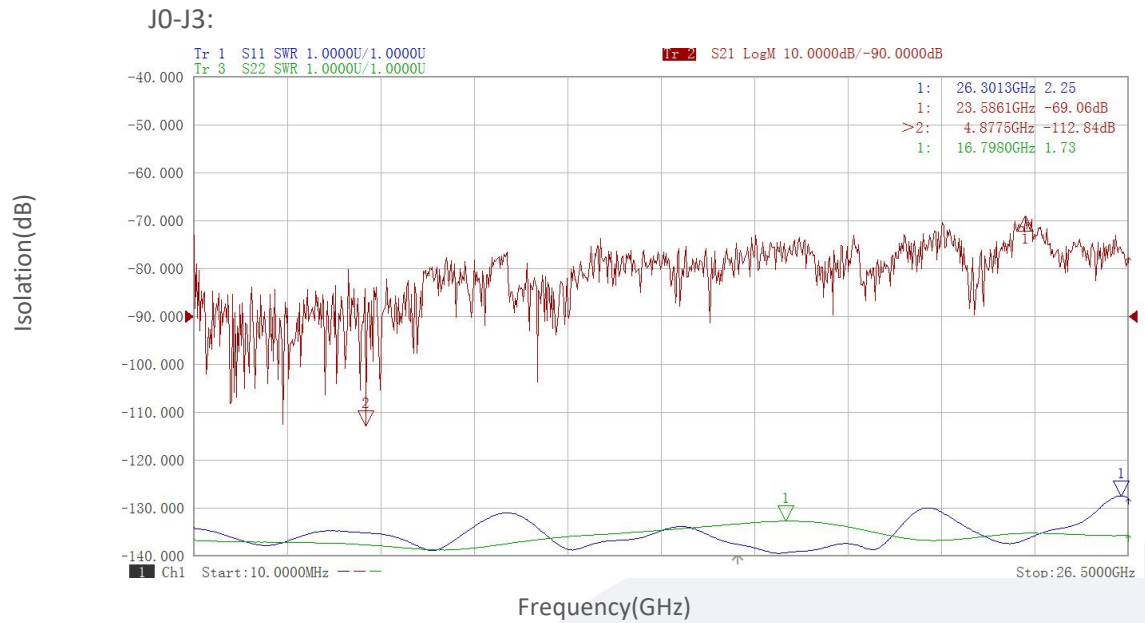


Insertion Loss & VSWR vs Frequency

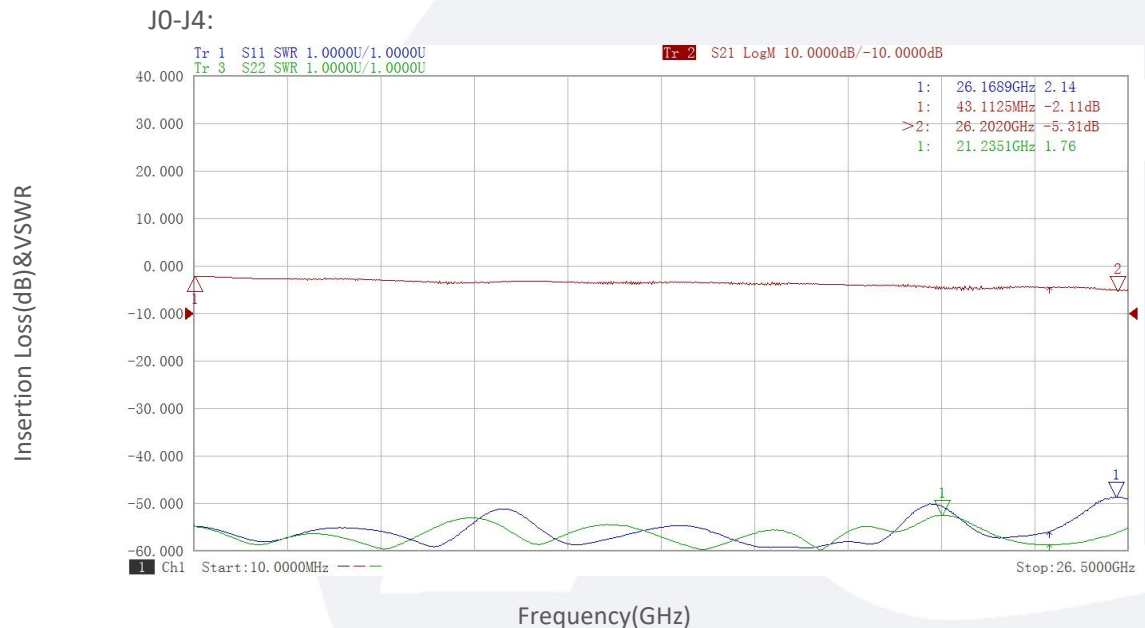

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

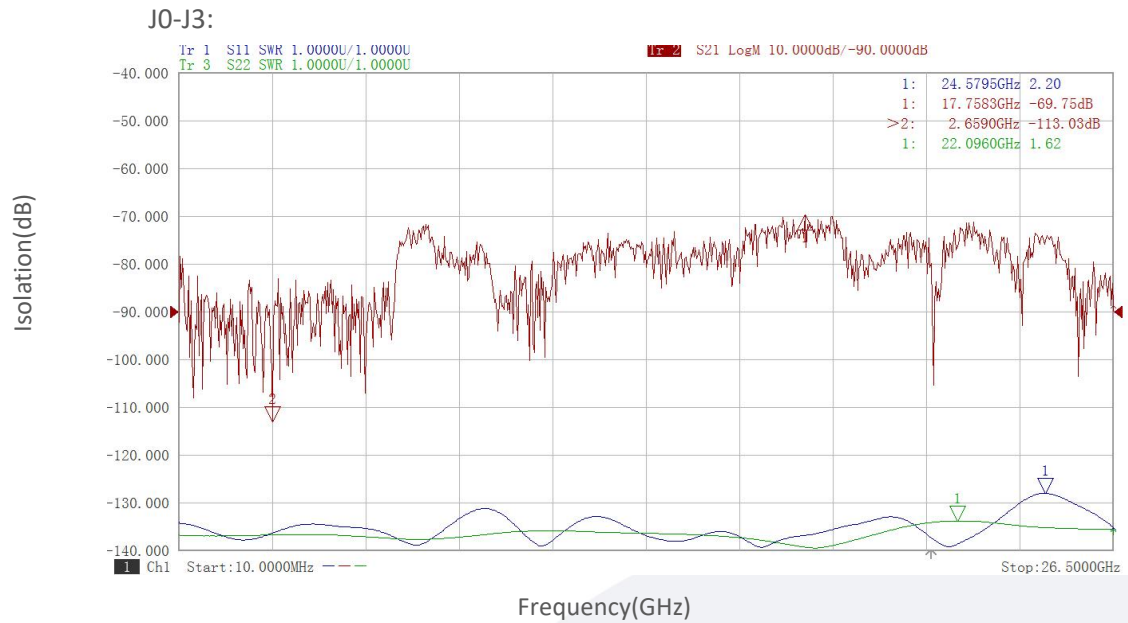

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.