

Coaxial Band-pass Filter

720-831 MHz/N Female

Model: TLBF-720M-831M-N-100W

TLBF-720M-831M-N-100W is a coaxial band-pass filter with a passband frequency from 720 to 831 MHz and a rejection frequencies from DC to 630 MHz and from 950 to 1500 MHz. The maximum insertion loss of the filter is 0.8 dB and the minimum rejection is 30 dB.

Features:

- Passband Frequency Range 720 to 831 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	720		831	MHz
通带插损 Passband Insertion Loss			0.8	dB
驻波 VSWR			1.5	:1
带外抑制 Rejection@DC-630MHz&9500-1500MHz	30			dB
耐受功率 Power Handling		100		W
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
温度范围 Temerature Range	-55 To +85	°C
接口 Connectors	N Female	
尺寸 Size	50*72*72	mm

外形图 Outline Drawing: Unit:mm

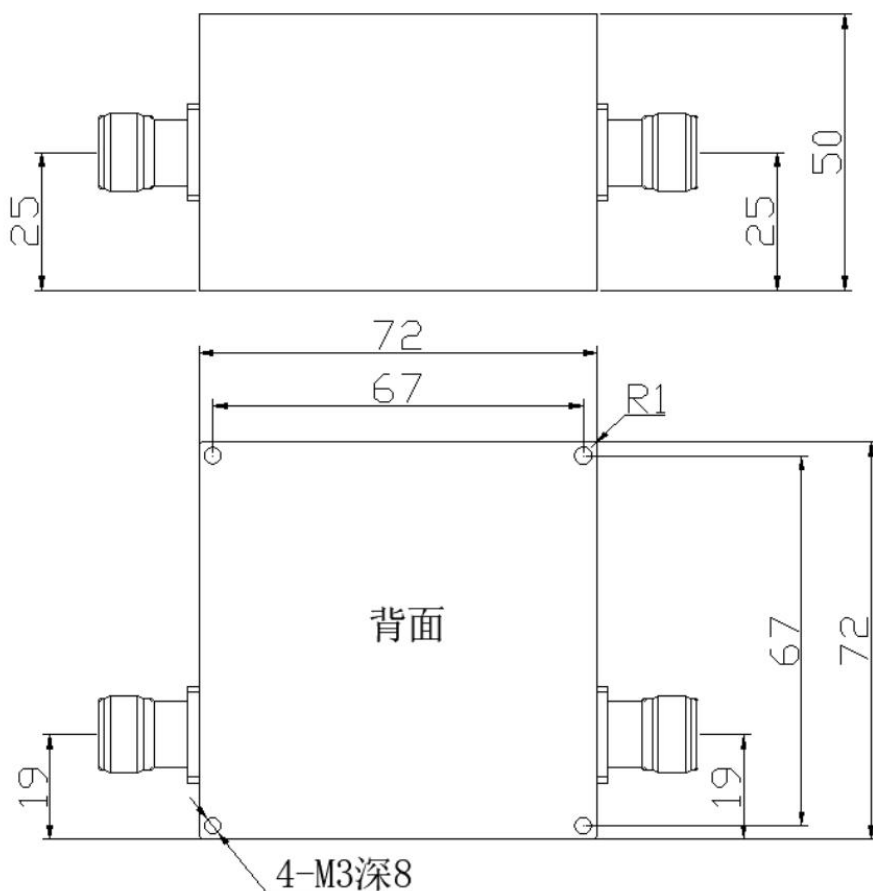


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-720M-831M-N-100W	Coaxial Band-pass Filter, Passband frequency range: 720-831MHz, Passband Insertion Loss: 0.8dB, N Female	Rev.1.0

典型曲线 Typical Performance Data:

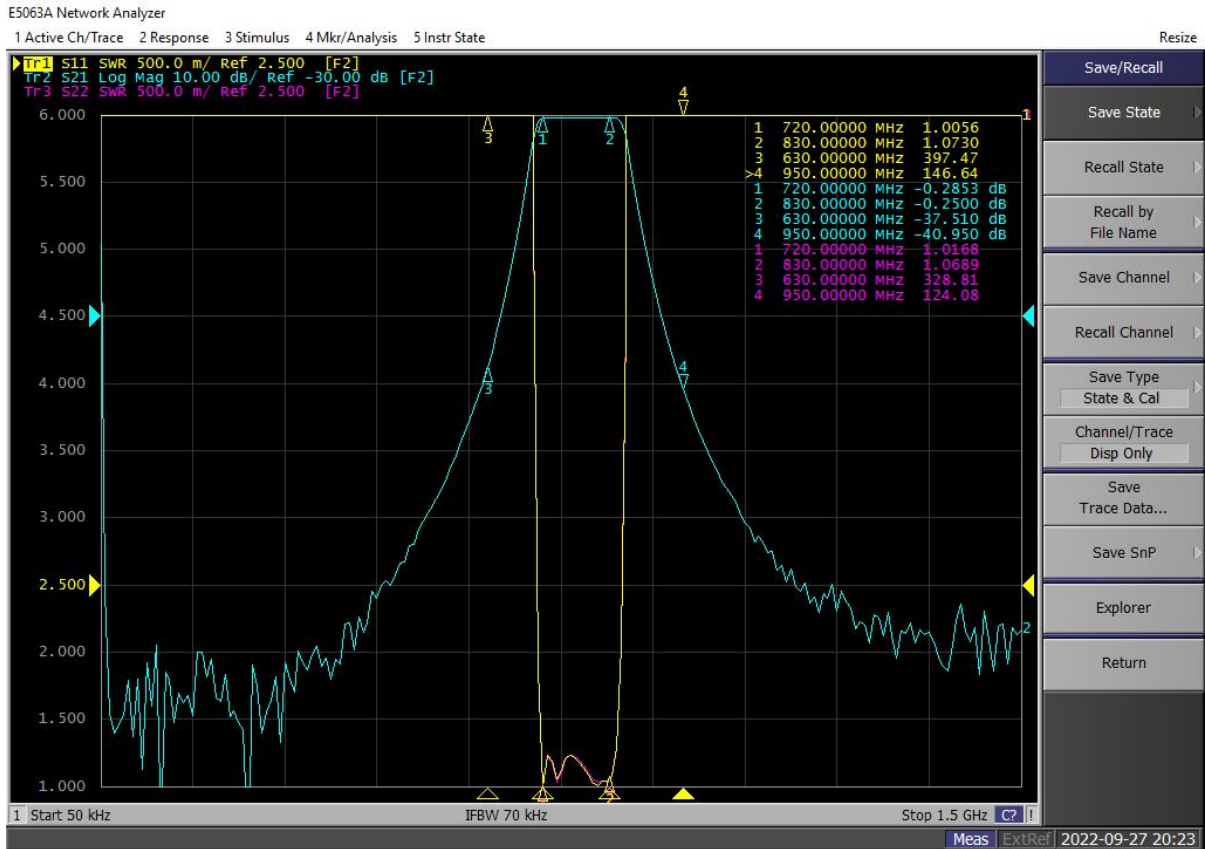

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.